



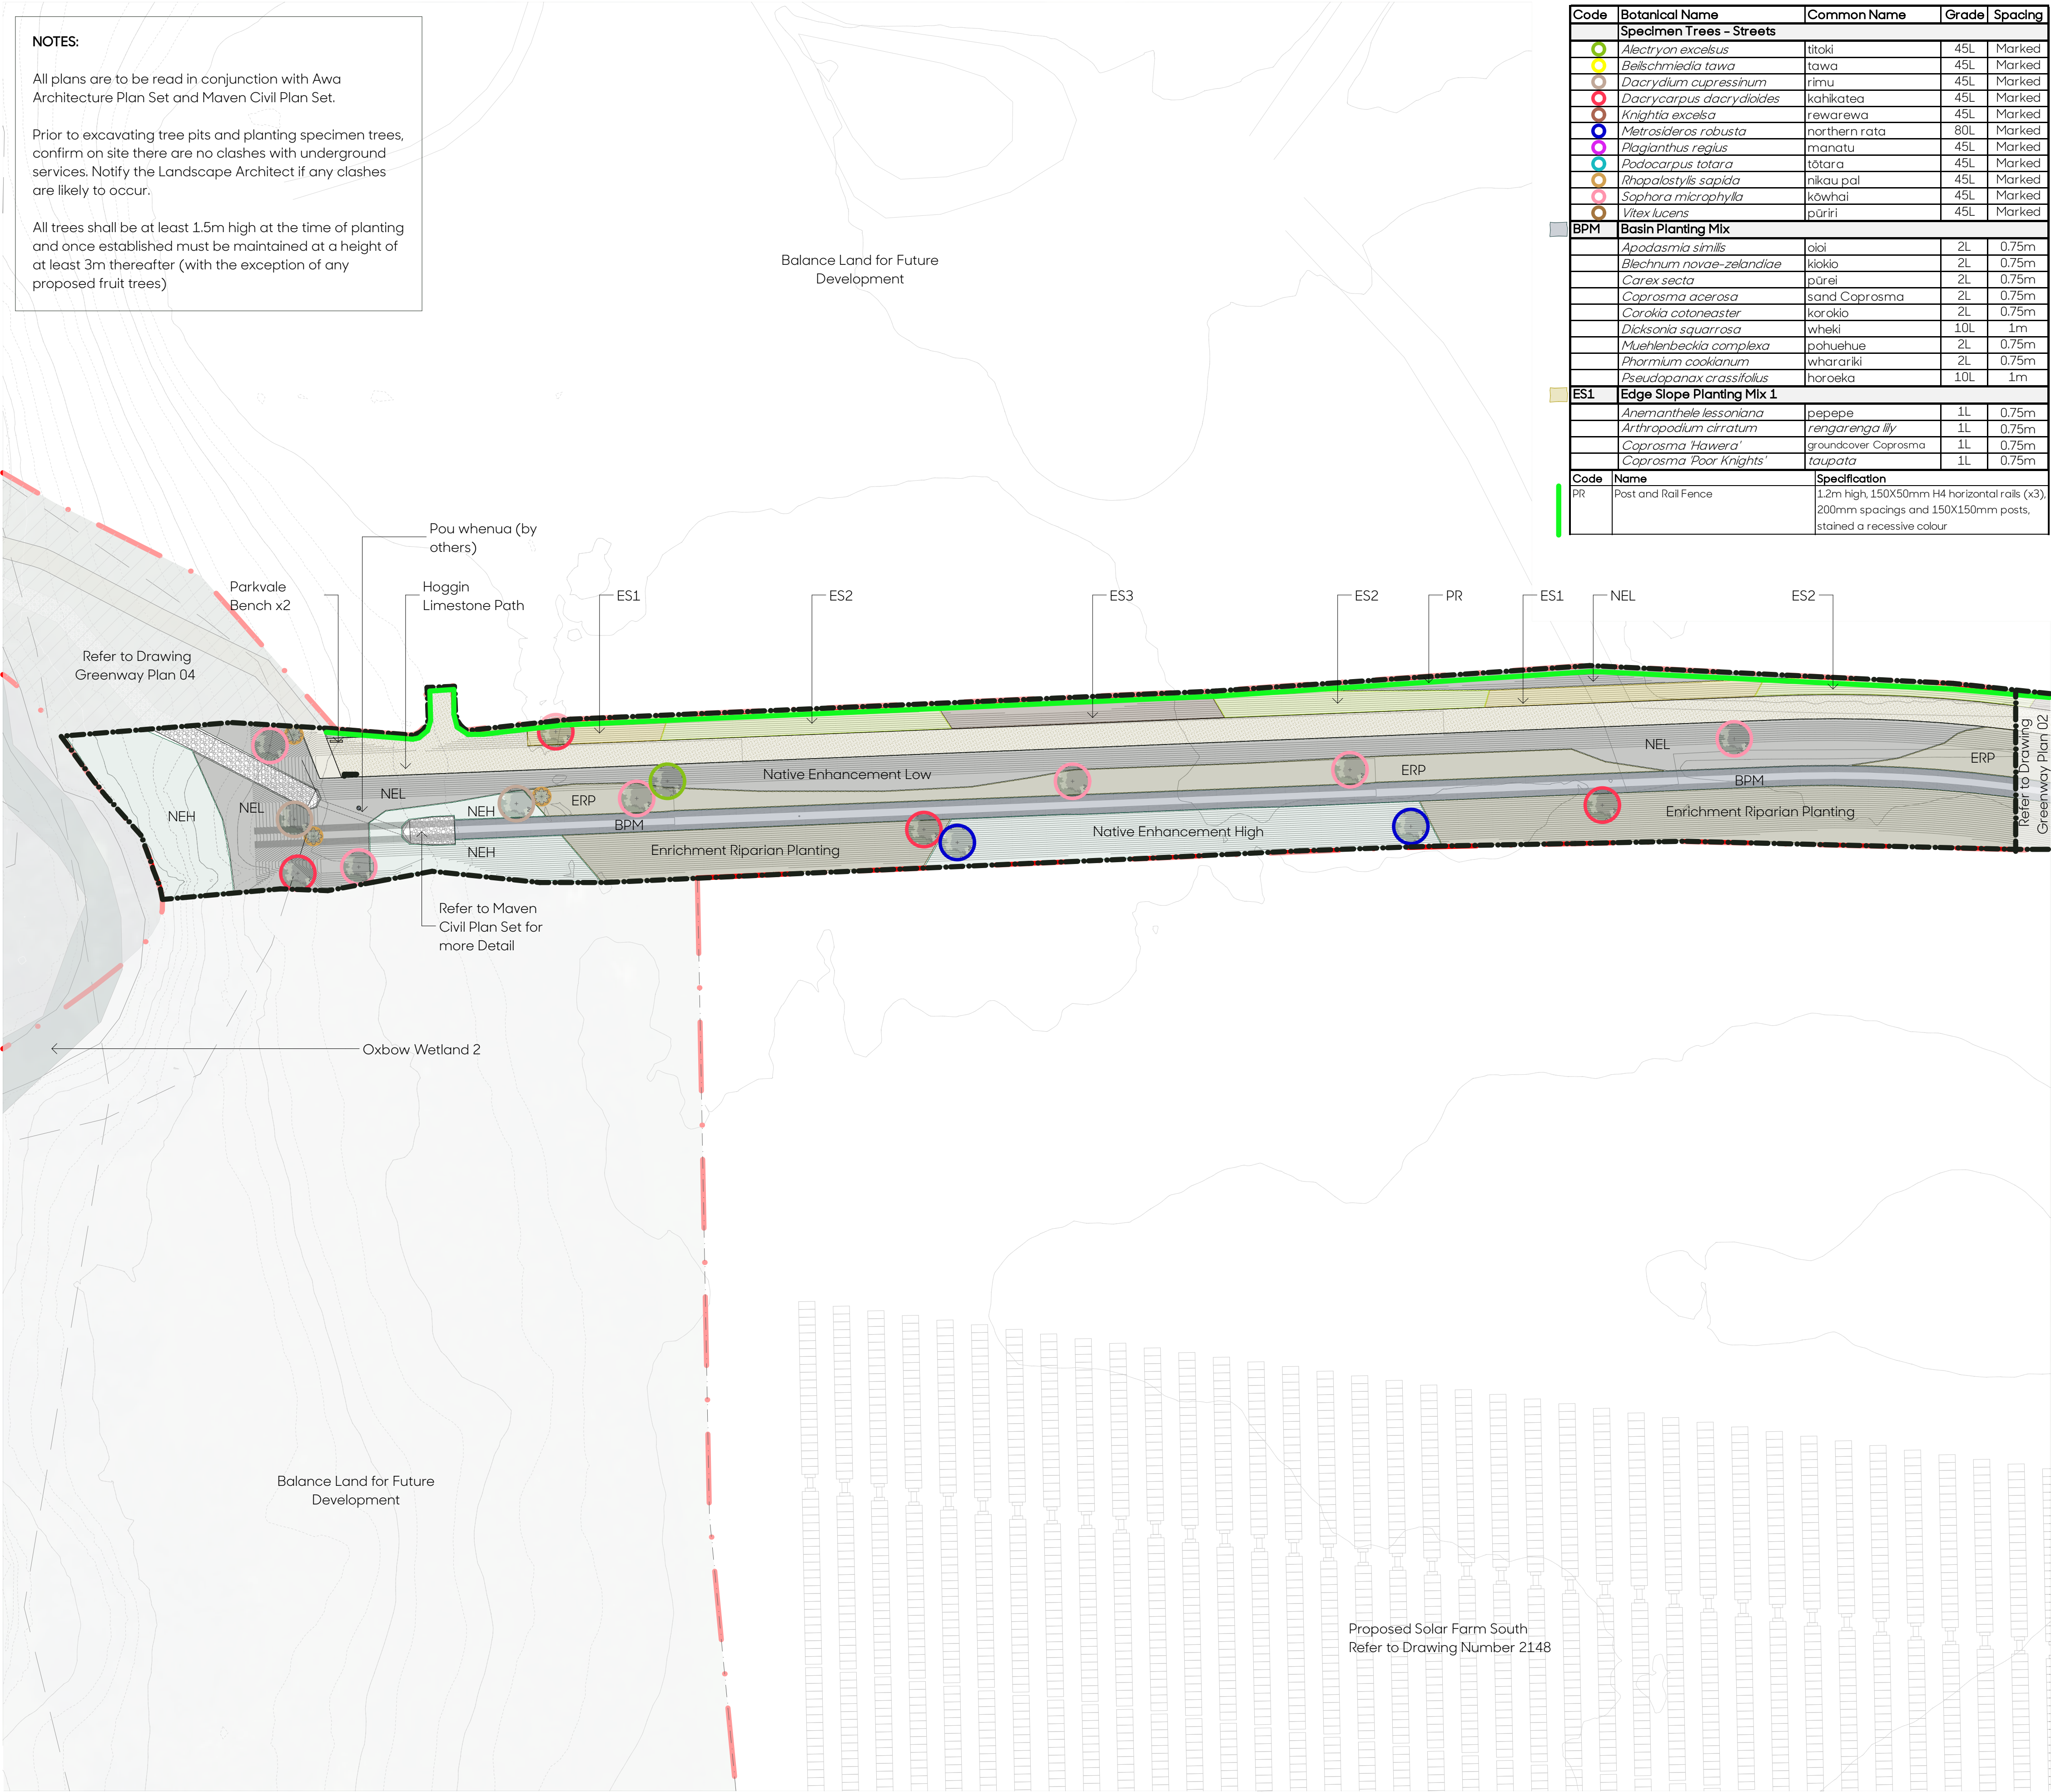


Code	Botanical Name	Common Name	Grade	Spacing
Specimen Trees – Streets				
	<i>Alectryon excelsus</i>	titoki	45L	Marked
	<i>Beilschmiedia tawa</i>	tawa	45L	Marked
	<i>Dacrydium cupressinum</i>	rimu	45L	Marked
	<i>Dacrycarpus dacrydioides</i>	kahikatea	45L	Marked
	<i>Knightia excelsa</i>	rewarewa	45L	Marked
	<i>Metrosideros robusta</i>	northern rata	80L	Marked
	<i>Plagianthus regius</i>	manatu	45L	Marked
	<i>Podocarpus totara</i>	tōtara	45L	Marked
	<i>Thoplostylis sapida</i>	nikau pal	45L	Marked
	<i>Sophora microphylla</i>	kōwhai	45L	Marked
	<i>Vitex lucens</i>	pūriri	45L	Marked
BPM Basin Planting Mix				
	<i>Apodasmia similis</i>	oiOI	2L	0.75m
	<i>Blechnum novae-zelandiae</i>	kiokio	2L	0.75m
	<i>Carex secta</i>	pūrei	2L	0.75m
	<i>Caprosma acerosa</i>	sand Caprosma	2L	0.75m
	<i>Corakia cotoneaster</i>	korakio	2L	0.75m
	<i>Dicksonia squarrosa</i>	whēki	10L	1m
	<i>Muehlenbeckia complexa</i>	pohuehue	2L	0.75m
	<i>Phormium cookianum</i>	wharariki	2L	0.75m
	<i>Pseudopanax crassifolius</i>	horoeke	10L	1m
ES1 Edge Slope Planting Mix 1				
	<i>Anemanthele lessoniana</i>	pepepe	1L	0.75m
	<i>Arthropodium cirratum</i>	rengarenga lily	1L	0.75m
	<i>Caprosma 'Hawera'</i>	groundcover Caprosma	1L	0.75m
	<i>Caprosma 'Poor Knights'</i>	taupata	1L	0.75m
Code	Name	Specification		
PR	Post and Rail Fence	1.2m high, 150X50mm H4 horizontal rails (x3), 200mm spacings and 150X150mm posts, stained a recessive colour		

ES2	Edge Slope Planting Mix 2			
	<i>Anemanthele lessoniana</i>	pepepe	1L	0.75m
	<i>Arthropodium cirratum</i>	rengarenga lily	1L	0.75m
	<i>Caprosma Hawera</i>	groundcover Coprosma	1L	0.75m
	<i>Caprosma Poor Knights</i>	taupata	1L	0.75m
ES3	Edge Slope Planting Mix 3			
	<i>Blechnum novae-zelandiae</i>	kiokio	1L	0.75m
	<i>Machaerina sinclairii</i>	pepepe	1L	0.75m
	<i>Melictytus crassifolius</i>	thick-leaved Mahoe	1L	0.75m
	<i>Pimelea prostrata</i>	New Zealand daphne	1L	0.75m
NEL	Native Enhancement Low			
	<i>Chionochloa flavicans</i>	toetoe	1L	1m
	5% <i>Cordyline australis</i>	tīkōuka	1L	1m
	5% <i>Leptospermum scoparium</i>	manuka	1L	1m
	<i>Machaerina sinclairii</i>	pepepe	1L	1m
	<i>Phormium cookianum</i>	wharariki	1L	1m
	<i>Pimelea prostrata</i>	NZ daphne	1L	1m
	<i>Veronica stricta</i>	koromiko	1L	1m
NEH	Native Enhancement High			
	<i>Austroderia fulvida</i>	haumata	0.5L	1.5m
	<i>Carex virgata</i>	pukio	0.5L	1.5m
	<i>Caprosma propinqua</i>	mingimingi	0.5L	1.5m
10%	<i>Cordyline australis</i>	tīkōuka	1L	1.5m
1%	<i>Dacrycarpus dacrydioides</i>	kahikatea	10L	1.5m
5%	<i>Dicksania squarrosa</i>	whēki	10L	1.5m
10%	<i>Kunzea robusta</i>	kanuka	1L	1.5m
10%	<i>Leptospermum scoparium</i>	manuka	1L	1.5m
5%	<i>Macropiper excelsum</i>	kawakawa	1L	1.5m
1%	<i>Metrosideros robusta</i>	northern rata	10L	1.5m
5%	<i>Olearia solandri</i>	coastal shrub daisy	1L	1.5m
	<i>Phormium tenax</i>	harakeke	1L	1.5m
5%	<i>Sophora microphylla</i>	kōwhai	10L	1.5m
	<i>Veronica stricta</i>	koromiko	1L	1.5m
ERP	Enhancement Riparian Planting			
	<i>Astelia grandis</i>	swamp astelia	1L	1.5m
	<i>Austroderia fulvida</i>	toetoe	1L	1.5m
	<i>Blechnum novae-zelandiae</i>	kiokio	1L	1.5m
5%	<i>Carex virgata</i>	pukio / swamp sedge	1L	1.5m
	<i>Carpodetus serratus</i>	putaputaweta	10L	1.5m
	<i>Caprosma tenuicaulis</i>	swamp coprosma	1L	1.5m
5%	<i>Cordyline australis</i>	tīkōuka	1L	1.5m
5%	<i>Leptospermum scoparium</i>	manuka	1L	1.5m
	<i>Machaerina sinclairii</i>	pepepe	1L	1.5m
5%	<i>Melictytus ramiflorus</i>	mahoe	10L	1.5m
	<i>Phormium cookianum</i>	wharariki	1L	1.5m
1%	<i>Vitex lucens</i>	pūriri	10L	1.5m
MKP	Mahinga Kai Plant Mix			
	<i>Asplenium bulbiferum</i>	pikopiko	2L	1m
	<i>Caprosma robusta</i>	karamu	1L	1m
	5% <i>Cordylina australis</i>	tīkōuka	1L	1m
5%	<i>Cyathea dealbata</i>	ponga	10L	1m
5%	<i>Leptospermum scoparium</i>	manuka	1L	1m
	<i>Phormium tenax</i>	harakeke	1L	1m
5%	<i>Schefflera digitata</i>	pate	1L	1m
	<i>Solanum aviculare</i> var. <i>aviculare</i>	paroporo	1L	1m
	<i>Veronica stricta</i>	koromiko	1L	1m
	Hidden Forest			
	<i>Asplenium bulbiferum</i>	pikopiko	2L	1.5m
	<i>Arthropodium cirratum</i>	rengarenga lily	1L	1.5m
	10% <i>Beilschmiedia tawa</i>	tawa	10L	2m
	<i>Cordylina australis</i>	tīkōuka	1L	1.5m
	<i>Cyathea dealbata</i>	ponga	10L	2m
10%	<i>Dacrydium cupressinum</i>	rimu	10L	2m
10%	<i>Dacrycarpus dacrydioides</i>	kahikatea	10L	2m
	<i>Kunzea robusta</i>	kanuka	1L	1.5m
	<i>Leptospermum scoparium</i>	manuka	1L	1.5m
	<i>Macropiper excelsum</i>	kawakawa	1L	1.5m
10%	<i>Podocarpus totara</i>	tōtara	10L	2m
	Pa Harakeke			
	5% <i>Arthropodium cirratum</i>	rengarenga lily	1L	1m
	5% <i>Carex virgata</i>	pukio	1L	1m
	5% <i>Coprosma Poor Knights</i>	taupata	1L	1m
5%	<i>Muehlenbeckia complexa</i>	pohuehue	1L	1m
35%	<i>Phormium cookianum</i>	wharariki	1L	1.25m
40%	<i>Phormium tenax</i>	harakeke	1L	1.25m
10%	<i>Phormium tenax Rātōroa</i>	kōrari	1L	1.25m
Name		Specification		
Hardscape Surfaces & Elements				
Pou whenua (by others)		TBC, Indicative locations only		
Parkvale Bench		By Urban Effects or similar		
Hoggin Limestone		Hoggin Limestone Gap 6		

SPECIMEN TREES

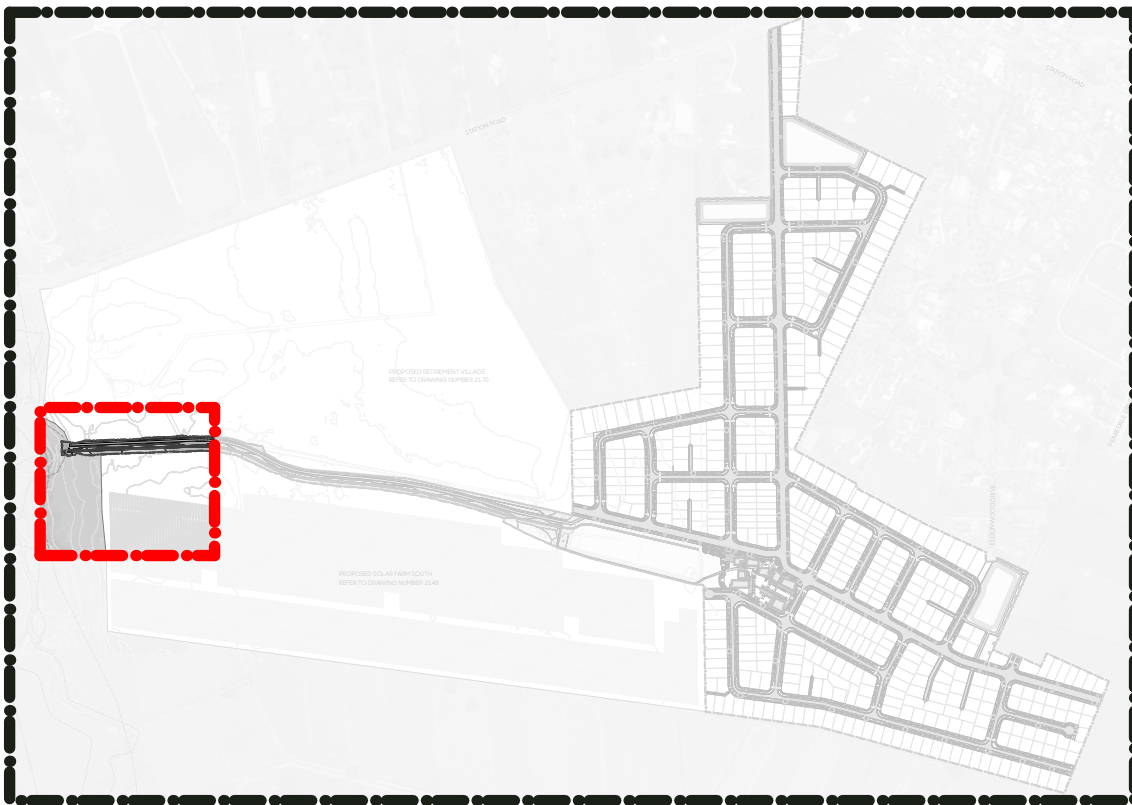

SHEET LOCATION PLAN - NTS

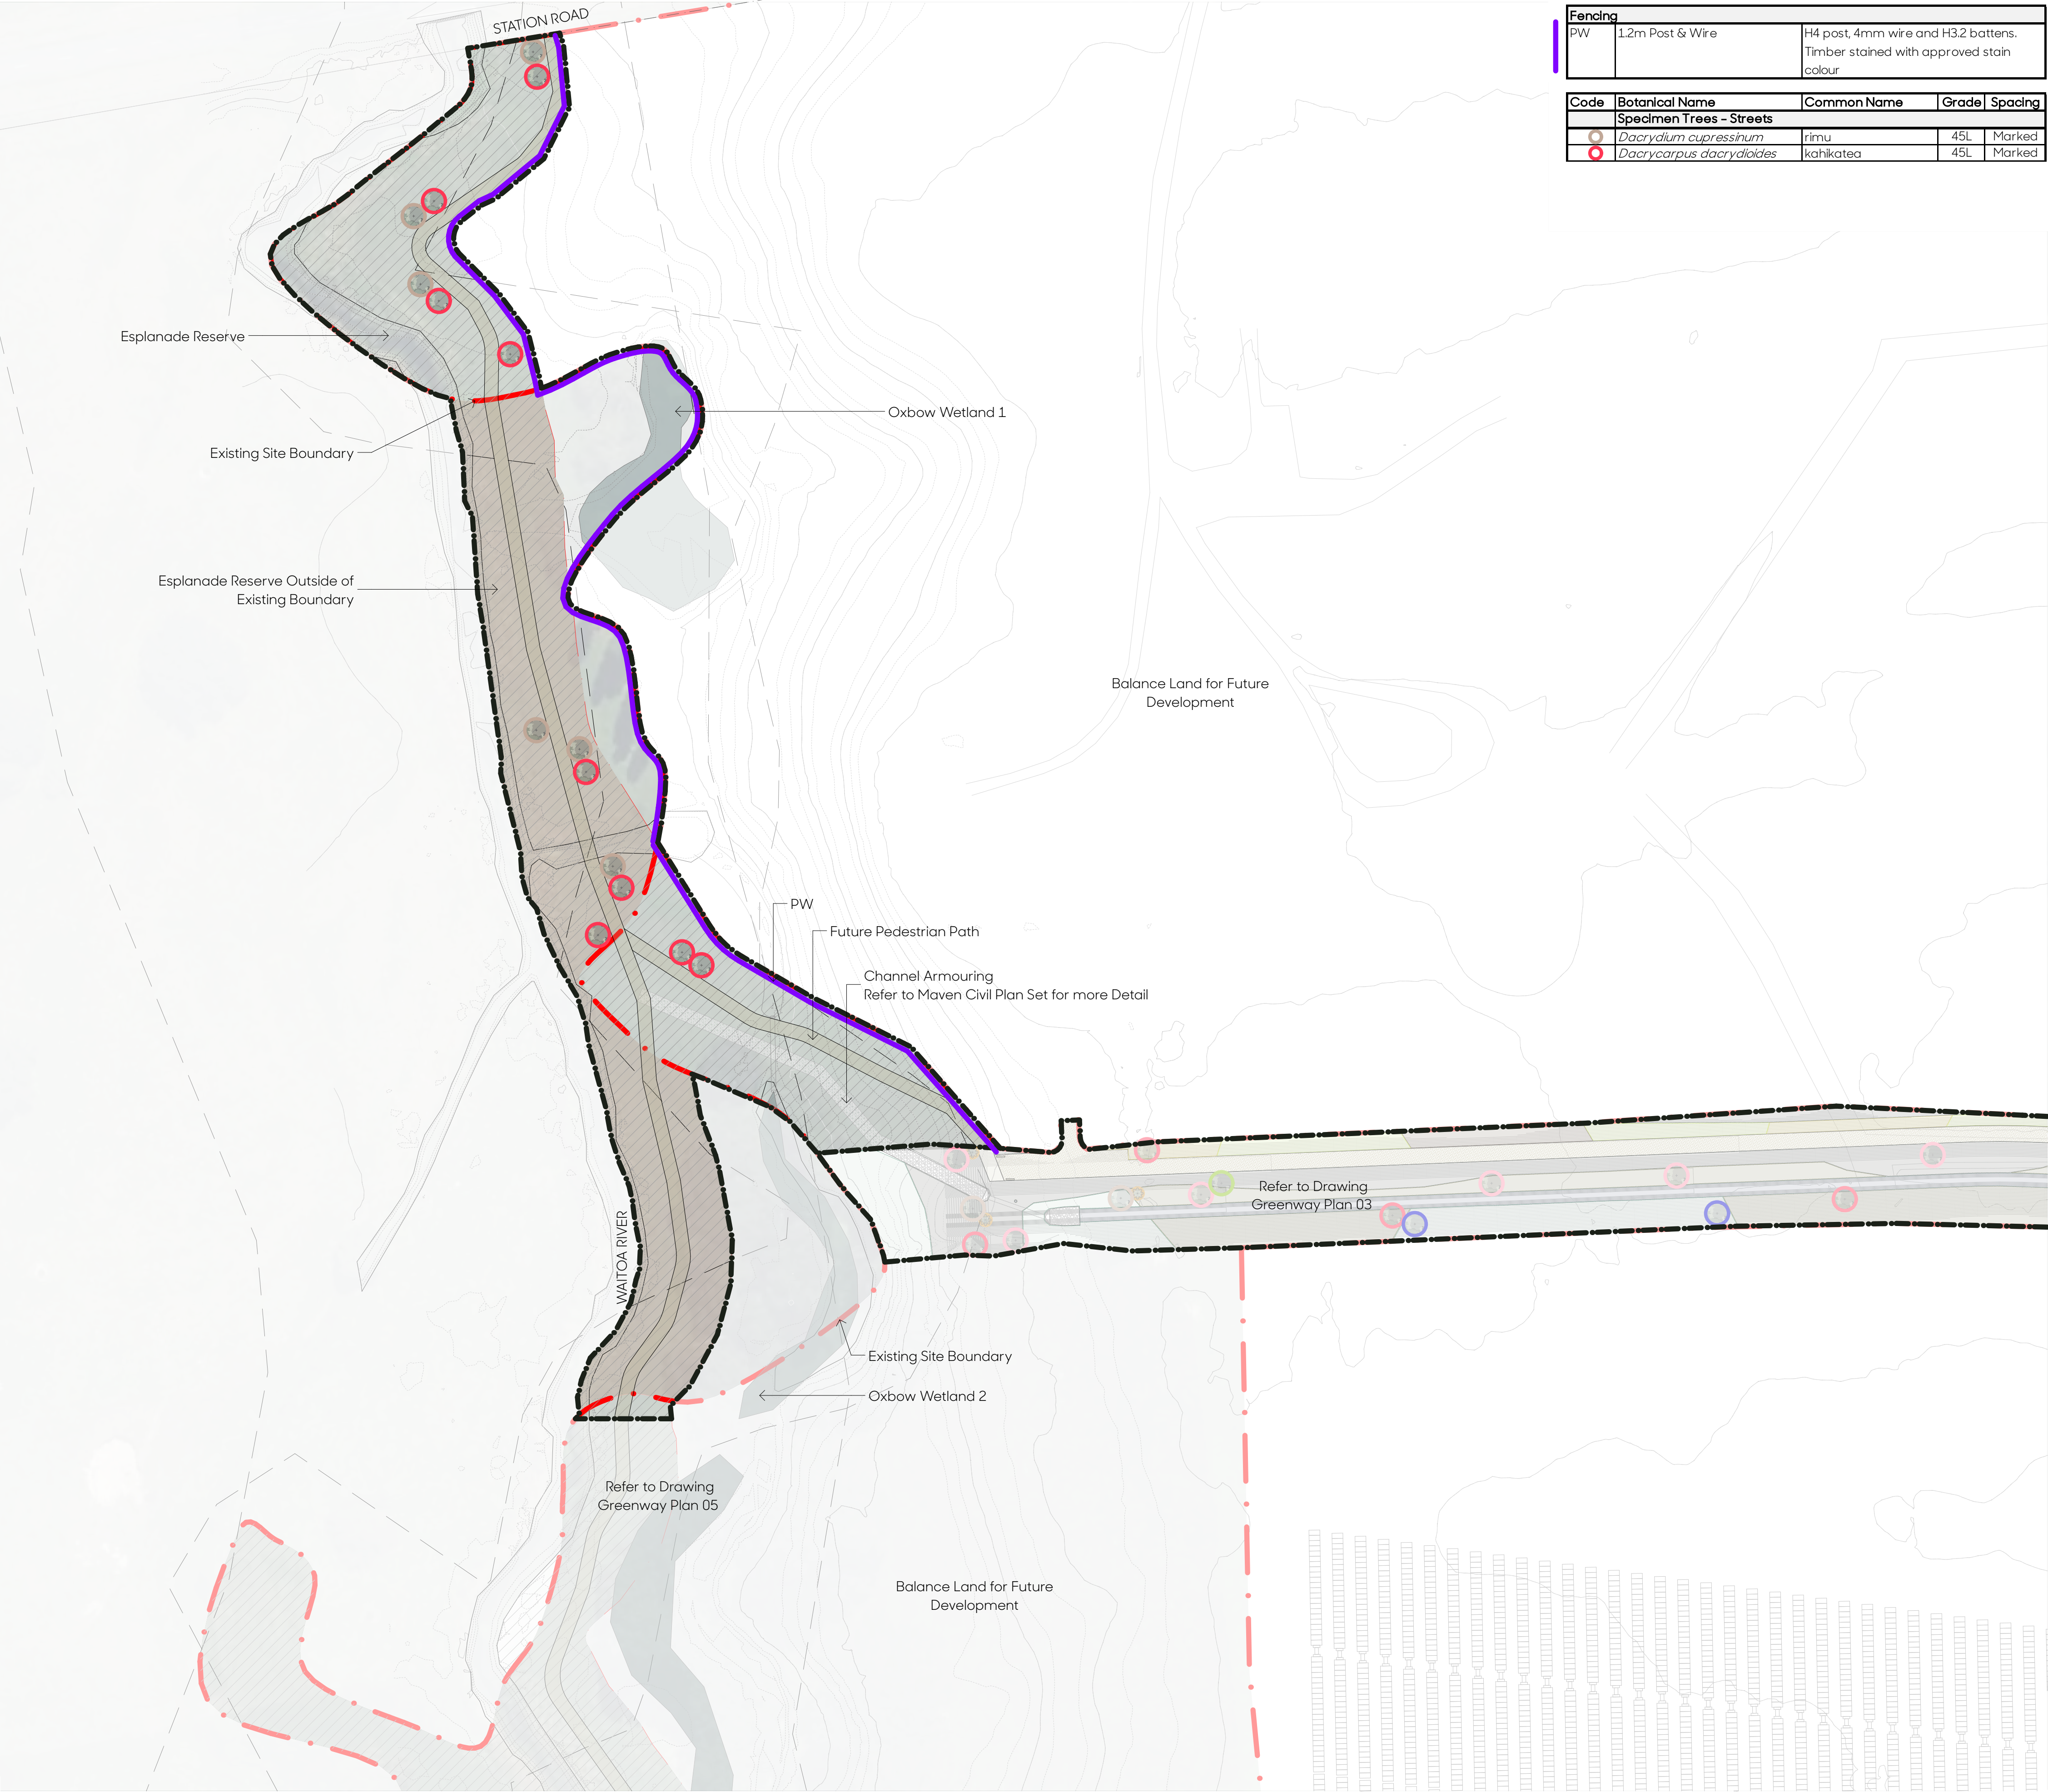


Fencing				
PW	1.2m Post & Wire	H4 post, 4mm wire and H3.2 battens. Timber stained with approved stain colour		
Code	Botanical Name	Common Name	Grade	Spacing
Specimen Trees - Streets				
	<i>Dacrydium cupressinum</i>	rimu	45L	Marked
	<i>Dacrycarpus dacrydioides</i>	kahikatea	45L	Marked

NOTES:


All plans are to be read in conjunction with Awa Architecture Plan Set and Maven Civil Plan Set.

Prior to excavating tree pits and planting specimen trees, confirm on site there are no clashes with underground services. Notify the Landscape Architect if any clashes are likely to occur.

All trees shall be at least 1.5m high at the time of planting and once established must be maintained at a height of at least 3m thereafter (with the exception of any proposed fruit trees)

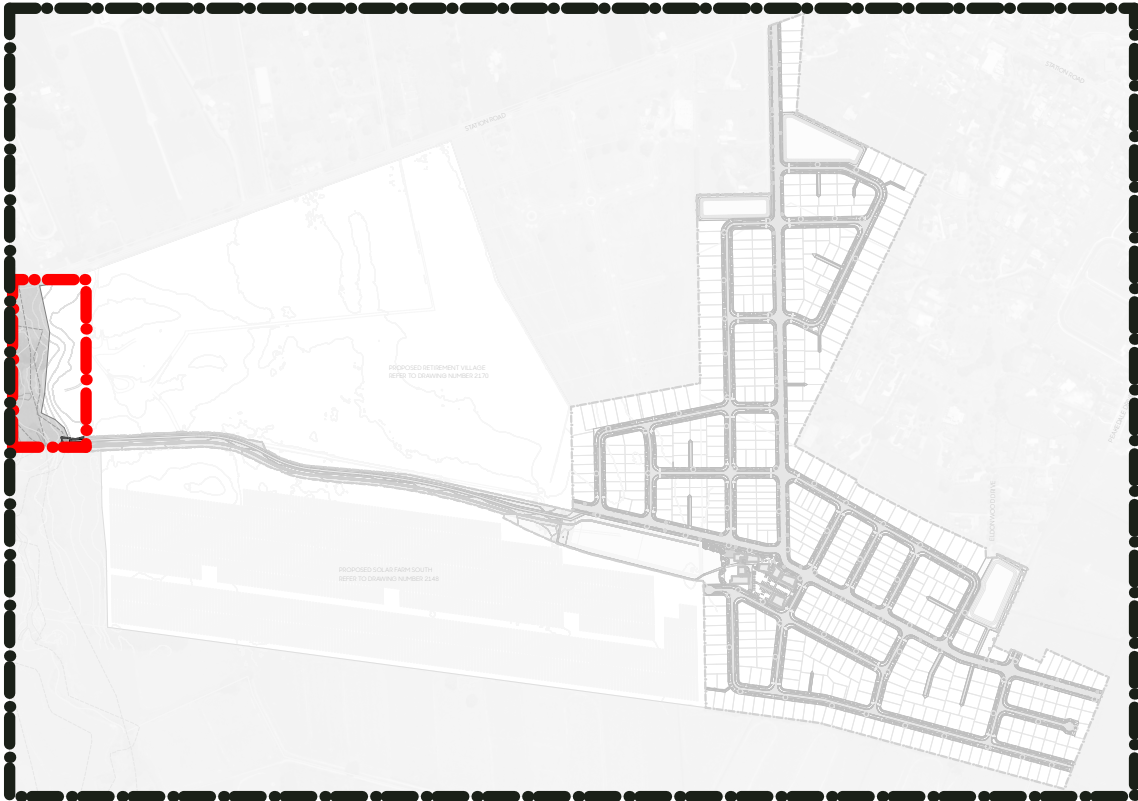

SHEET LOCATION PLAN - NTS

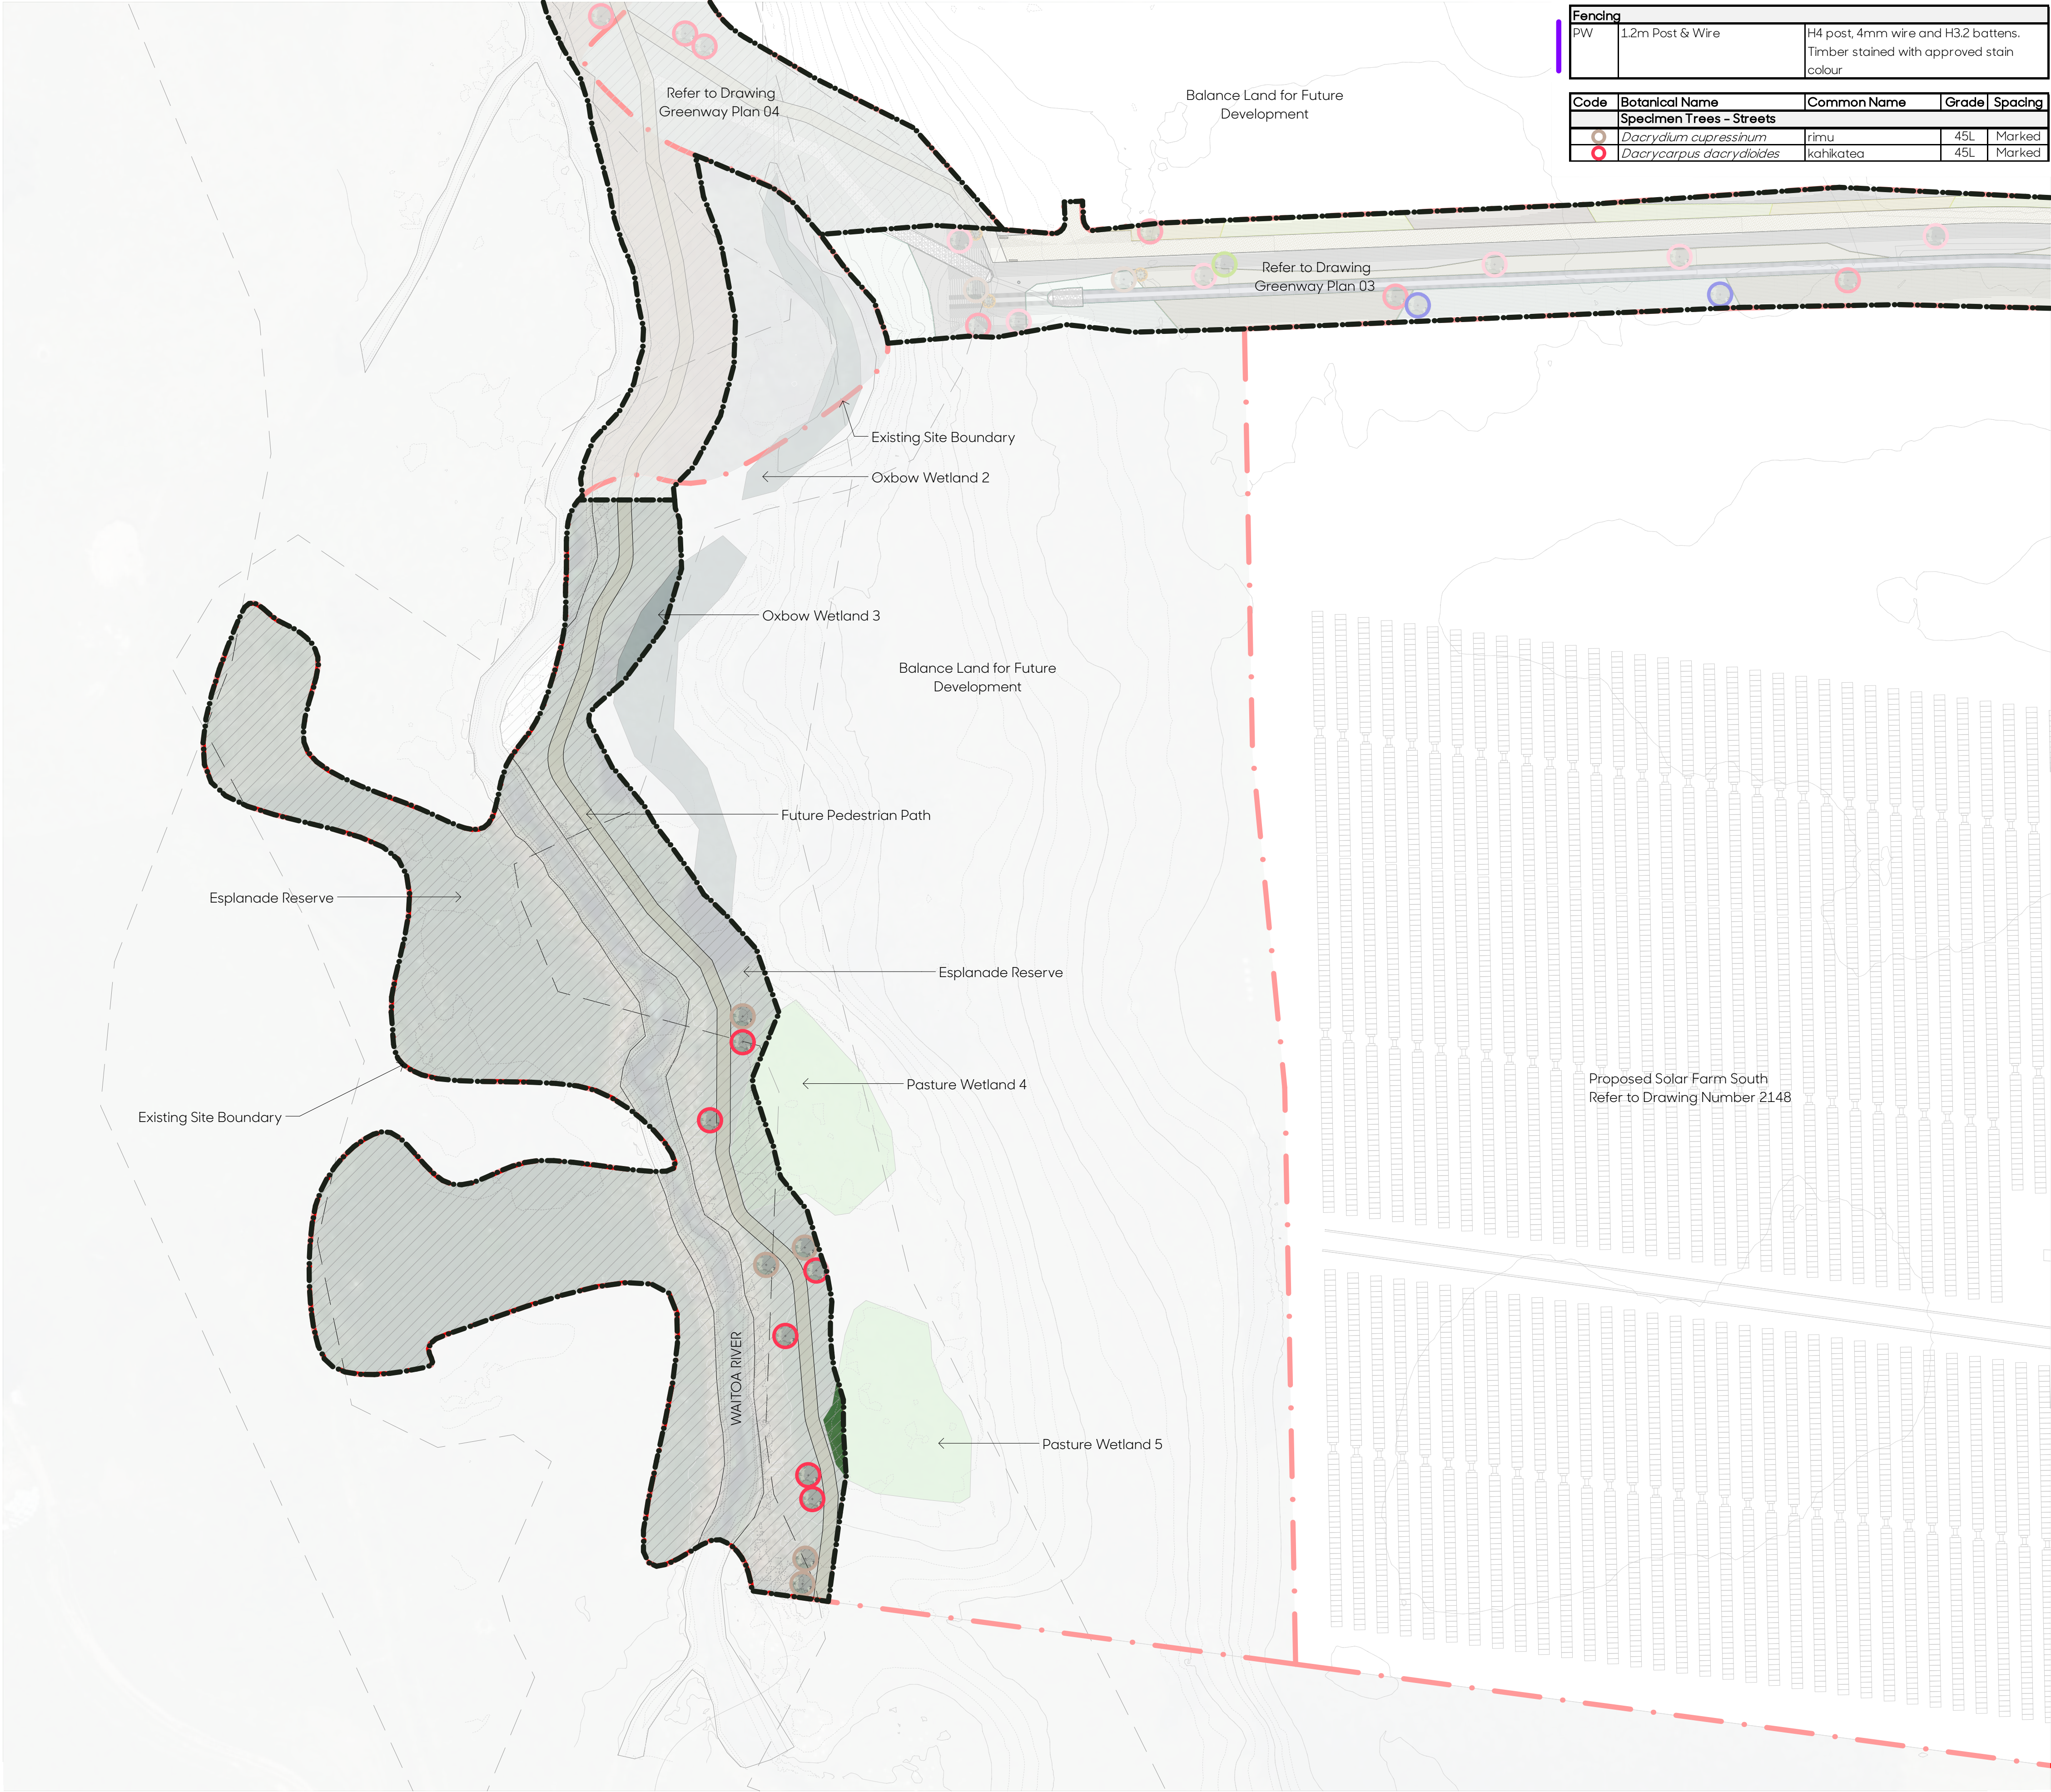

Fencing				
PW	1.2m Post & Wire	H4 post, 4mm wire and H3.2 battens. Timber stained with approved stain colour		
Code	Botanical Name	Common Name	Grade	Spacing
Specimen Trees - Streets				
	<i>Dacrydium cupressinum</i>	rimu	45L	Marked
	<i>Dacrycarpus dacrydioides</i>	kahikatea	45L	Marked

NOTES:

All plans are to be read in conjunction with Awa Architecture Plan Set and Maven Civil Plan Set.

Prior to excavating tree pits and planting specimen trees, confirm on site there are no clashes with underground services. Notify the Landscape Architect if any clashes are likely to occur.

All trees shall be at least 1.5m high at the time of planting and once established must be maintained at a height of at least 3m thereafter (with the exception of any proposed fruit trees)

