






+

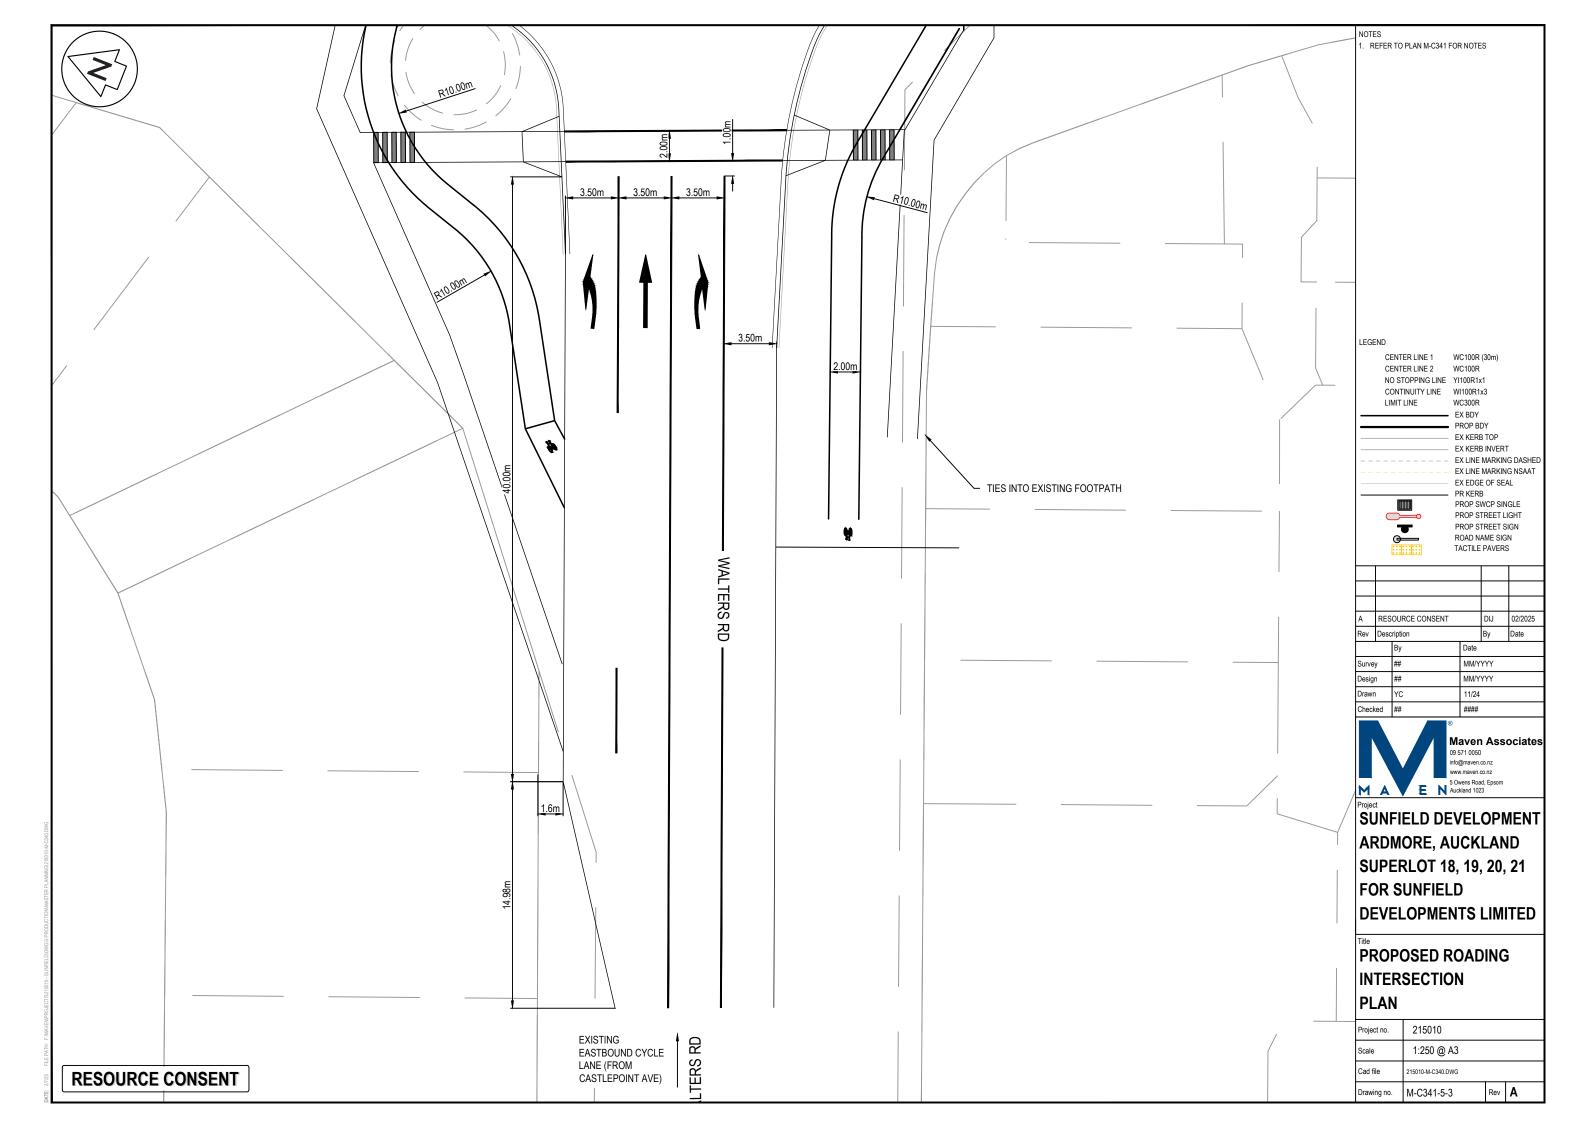


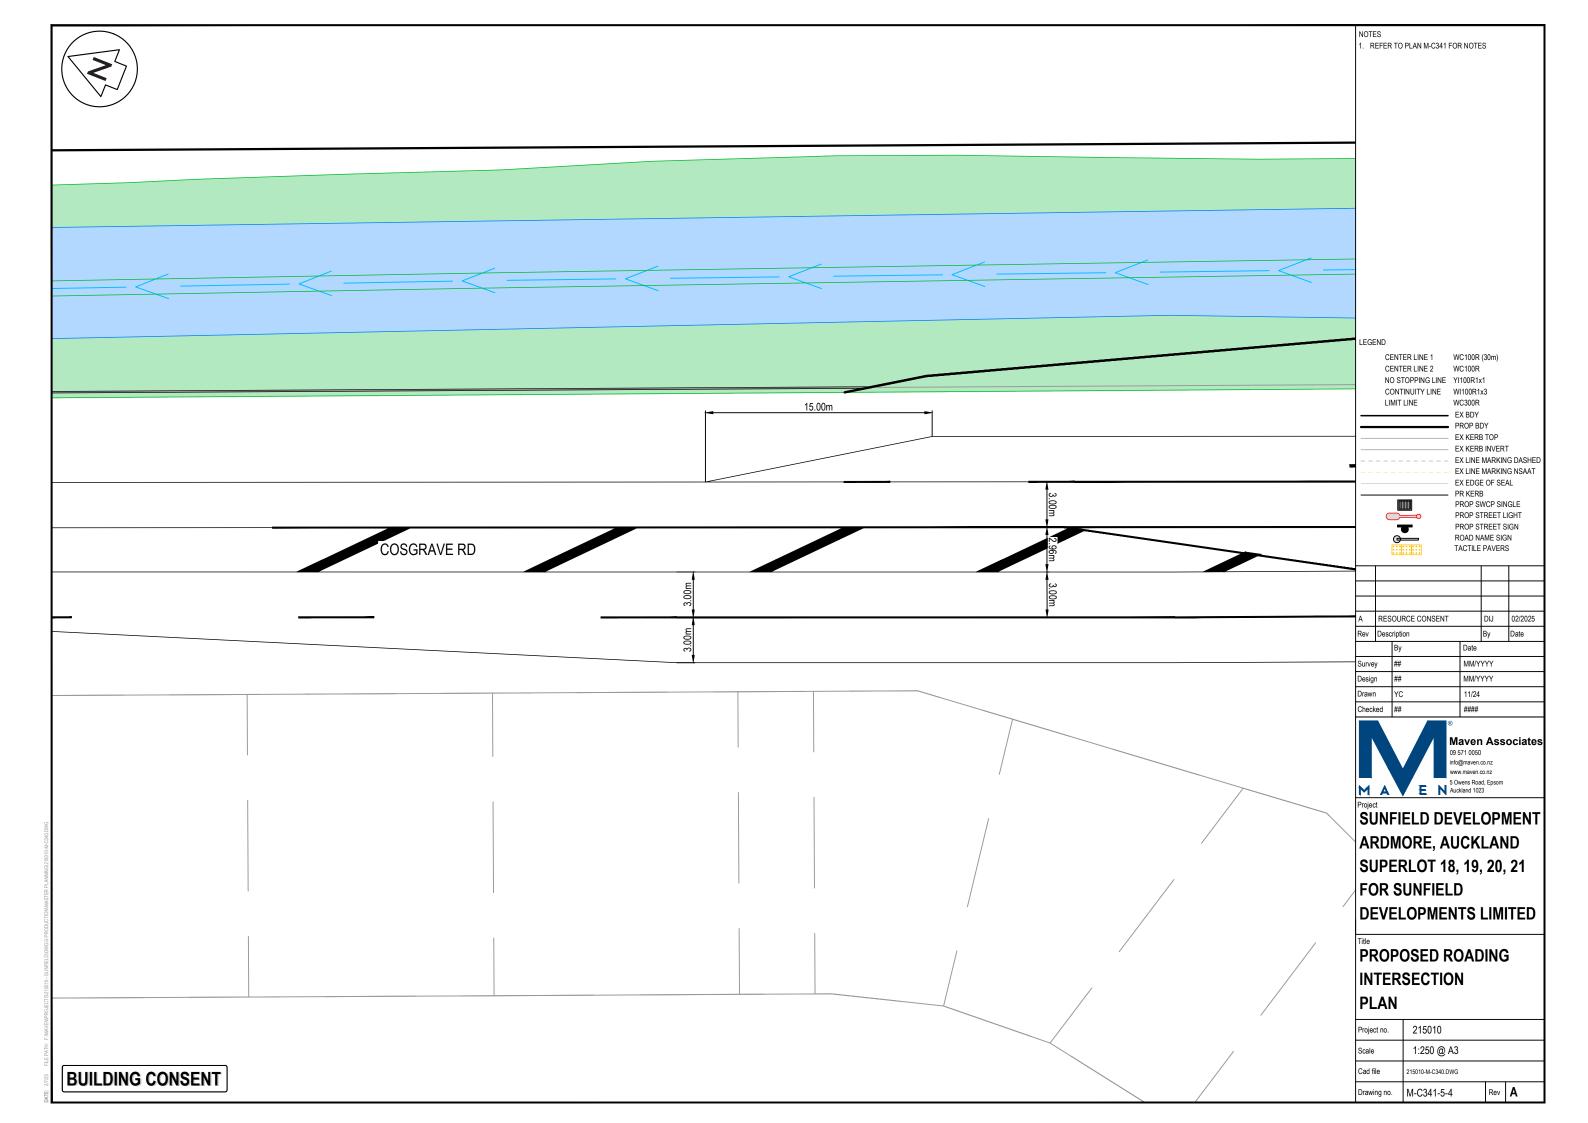


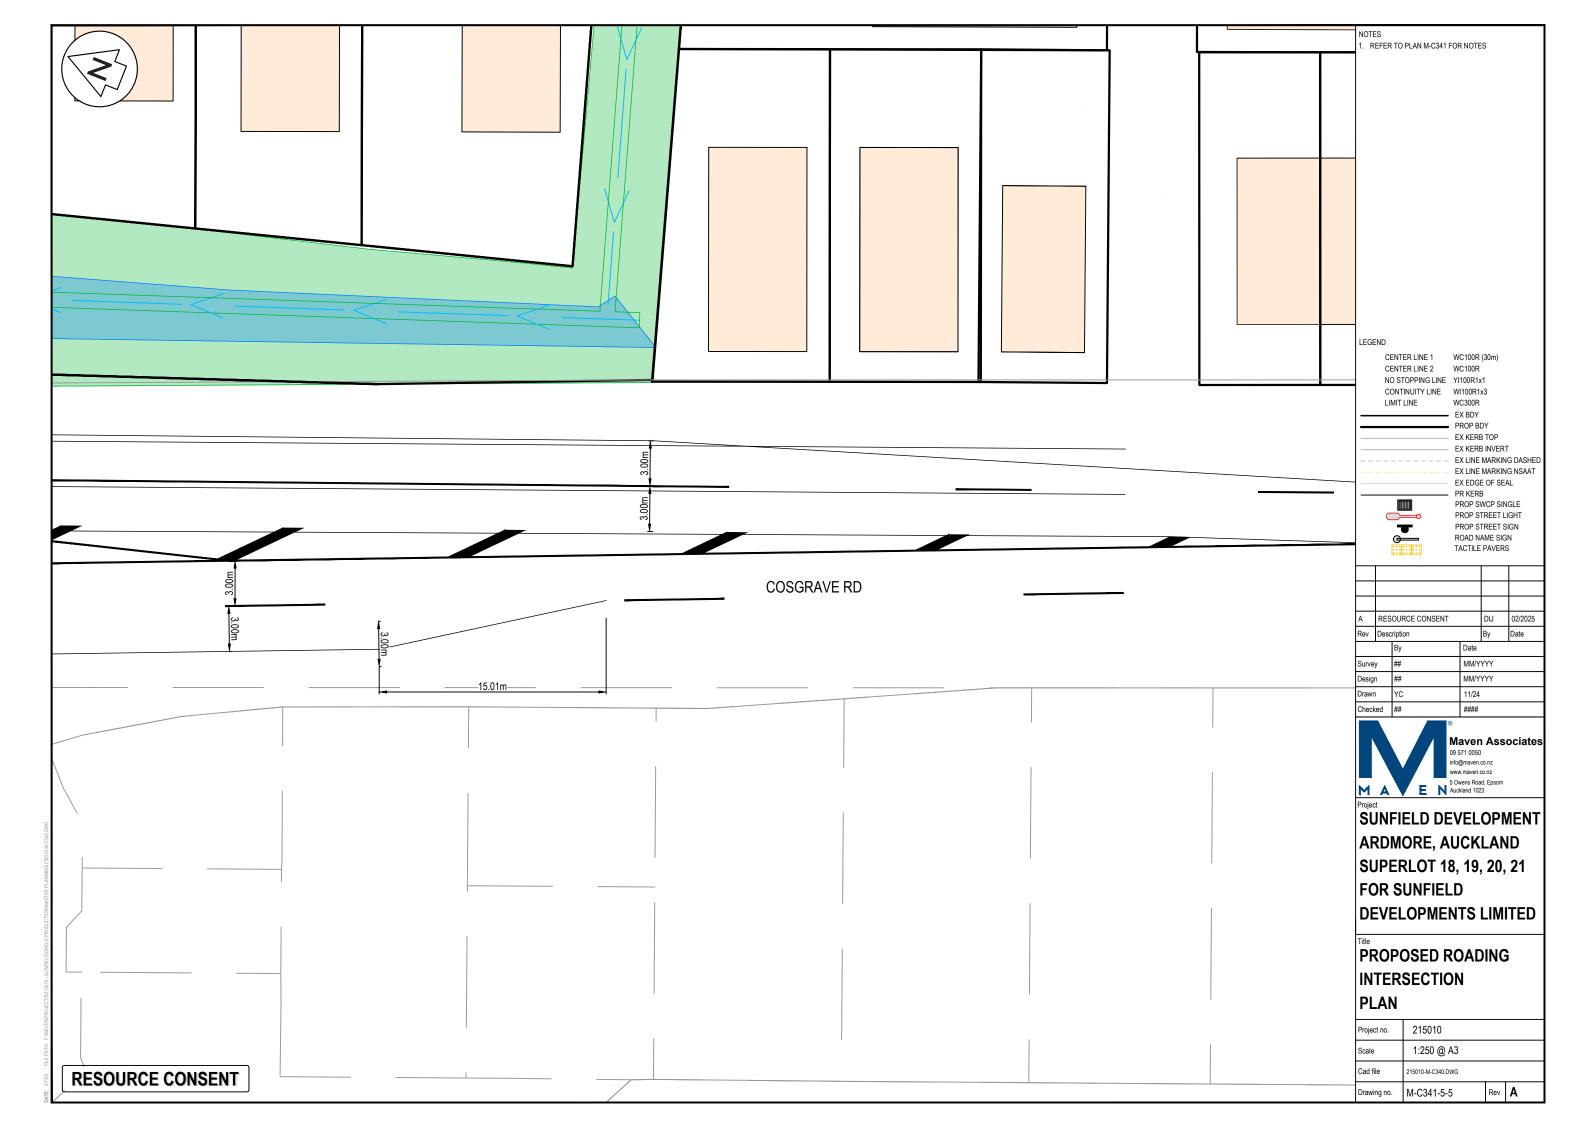


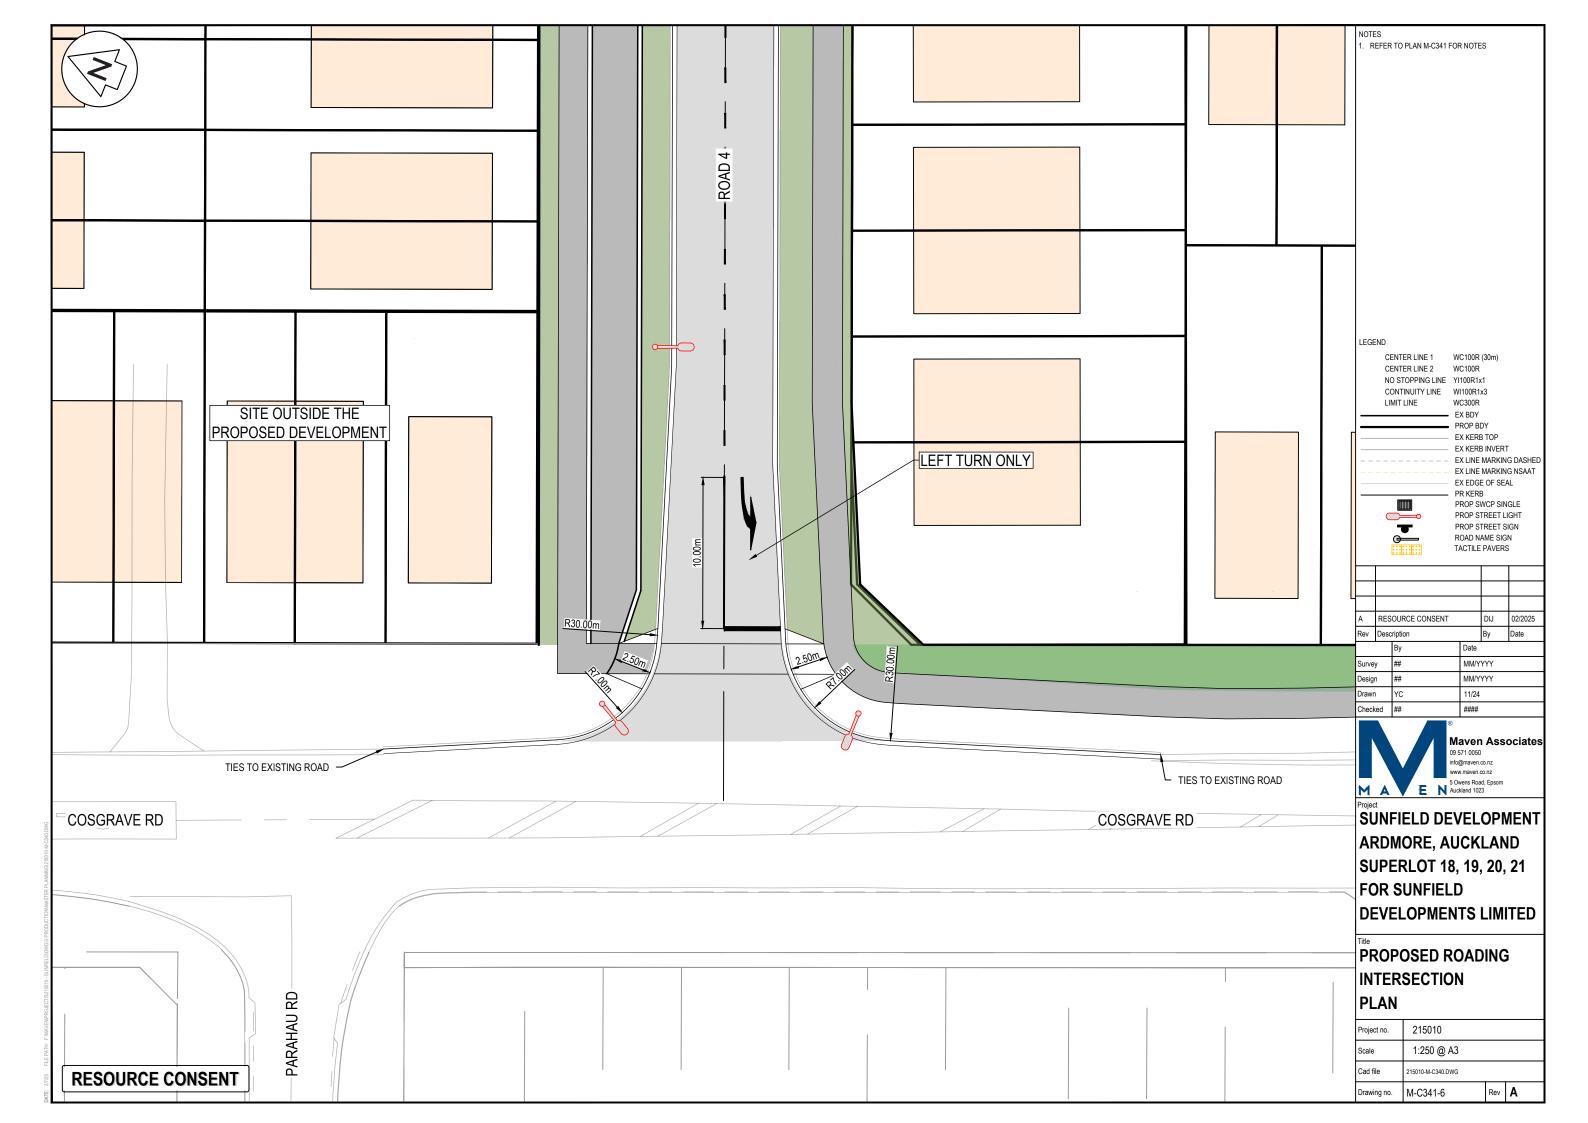


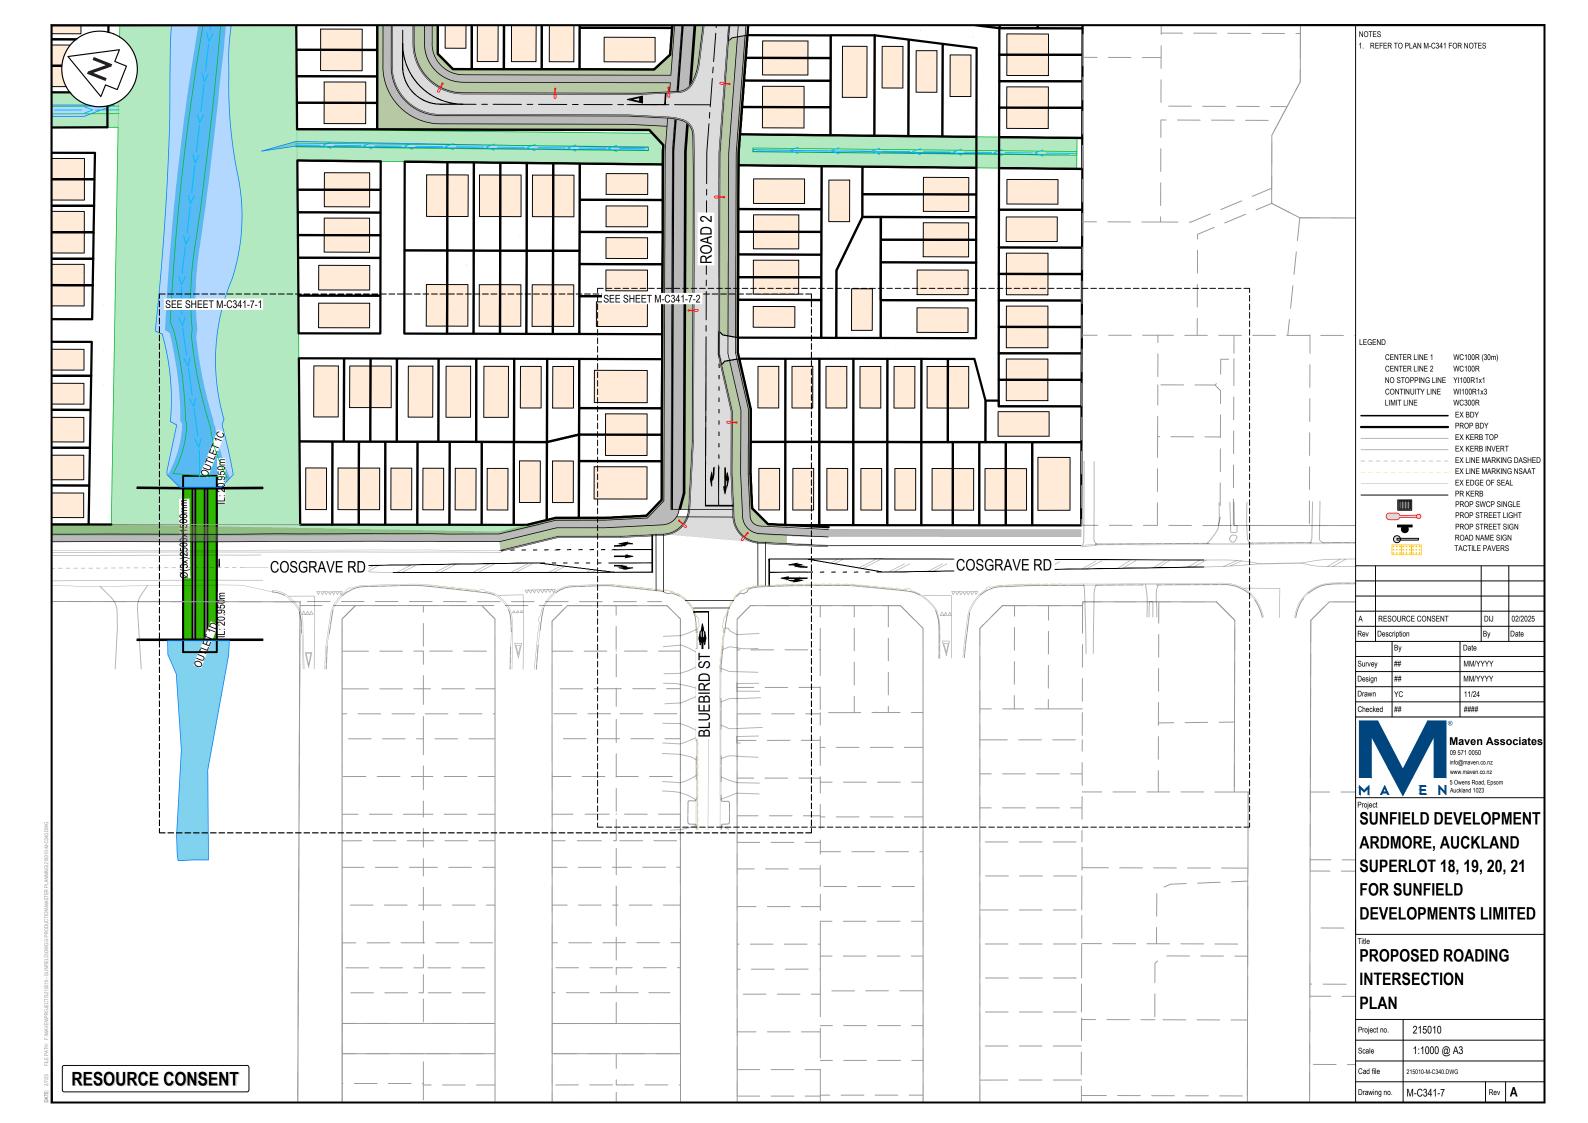


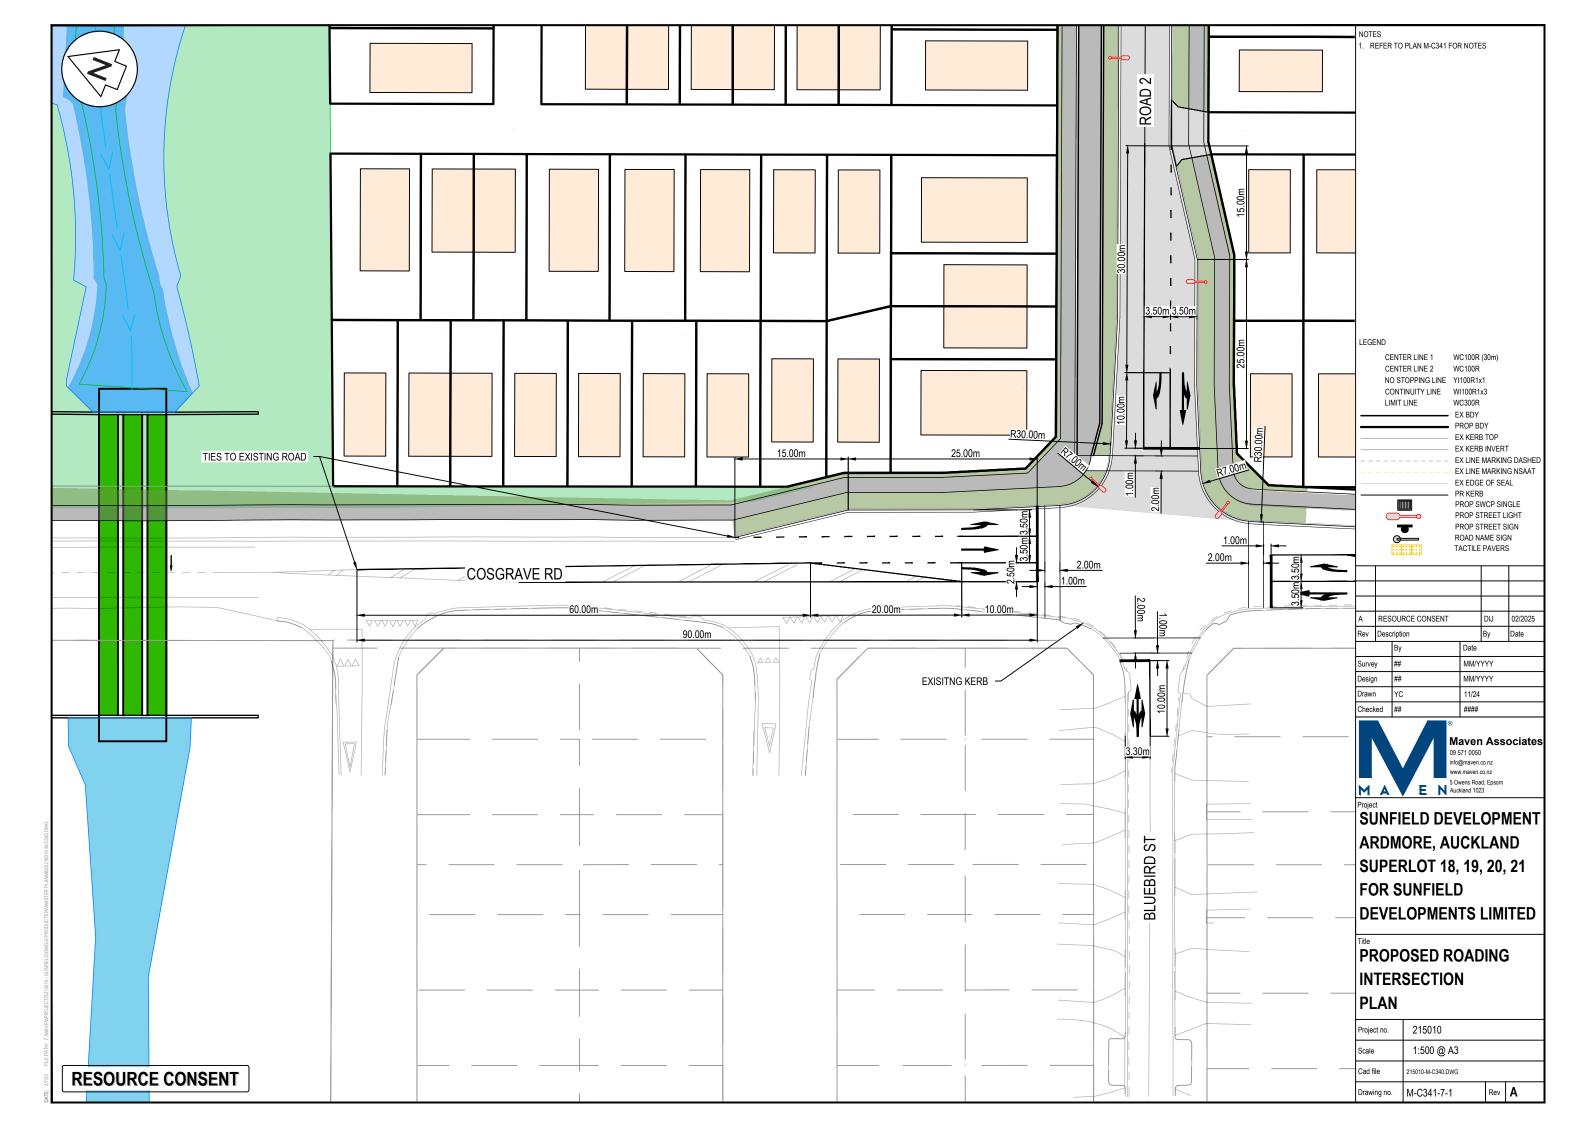


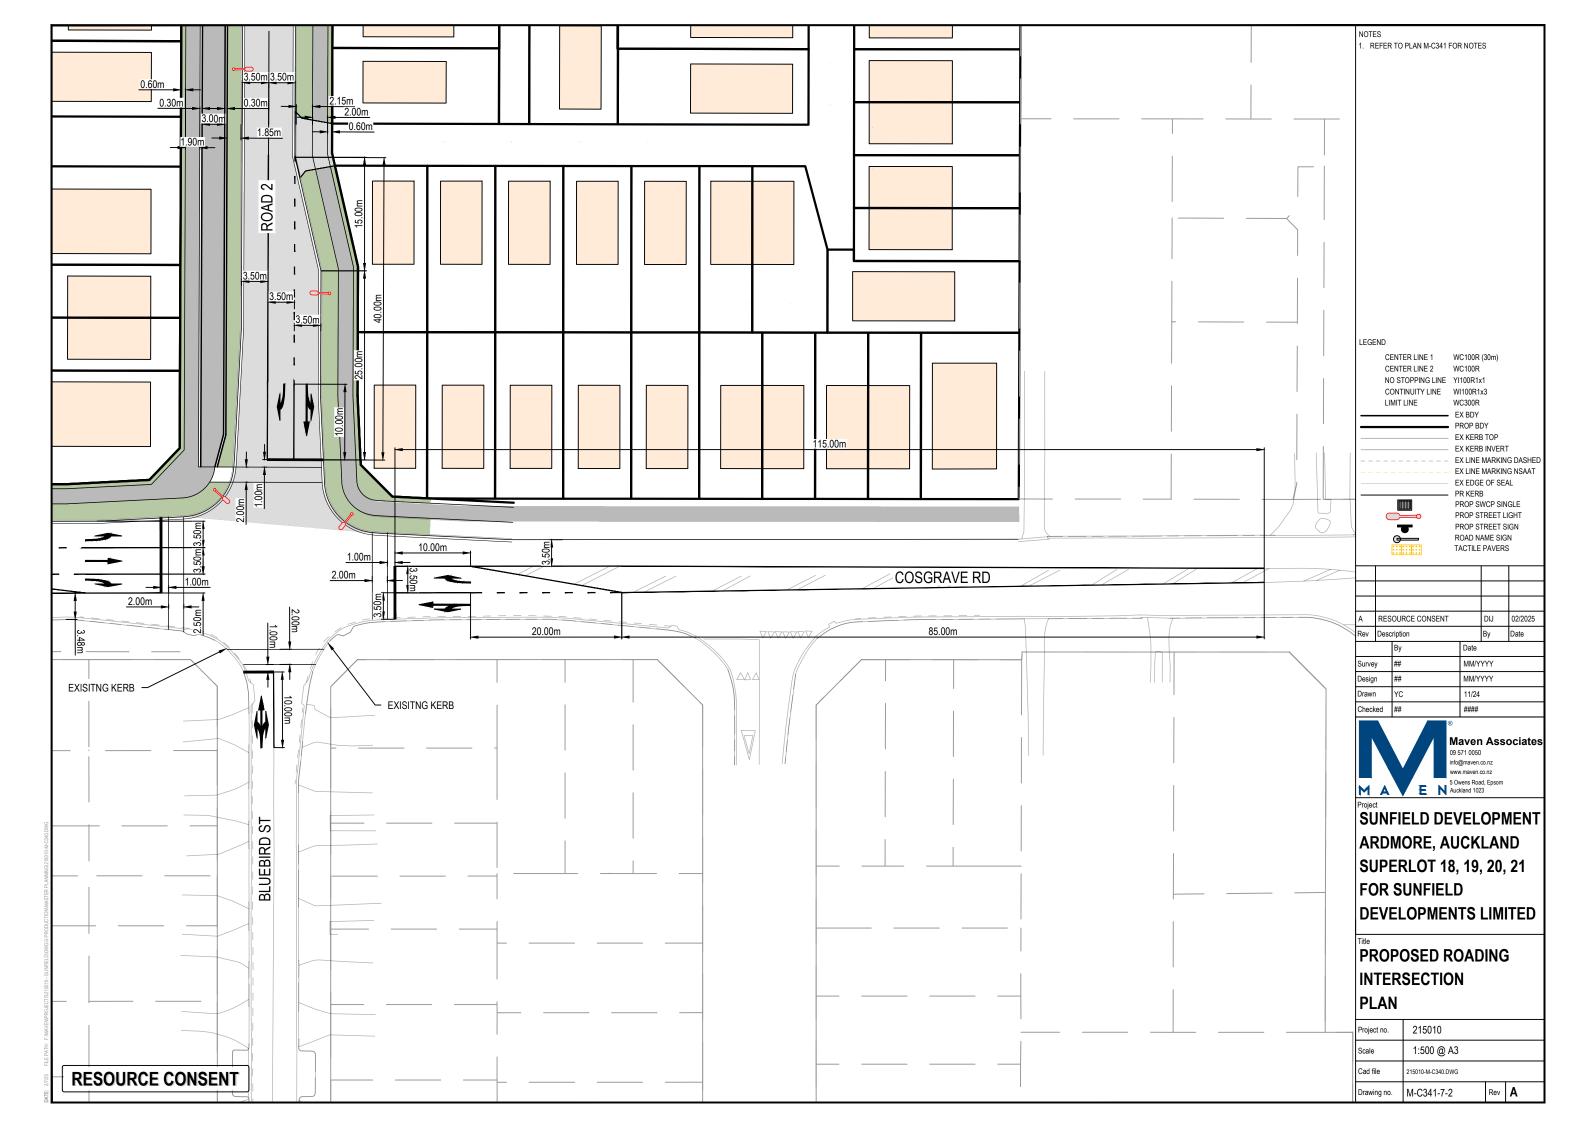


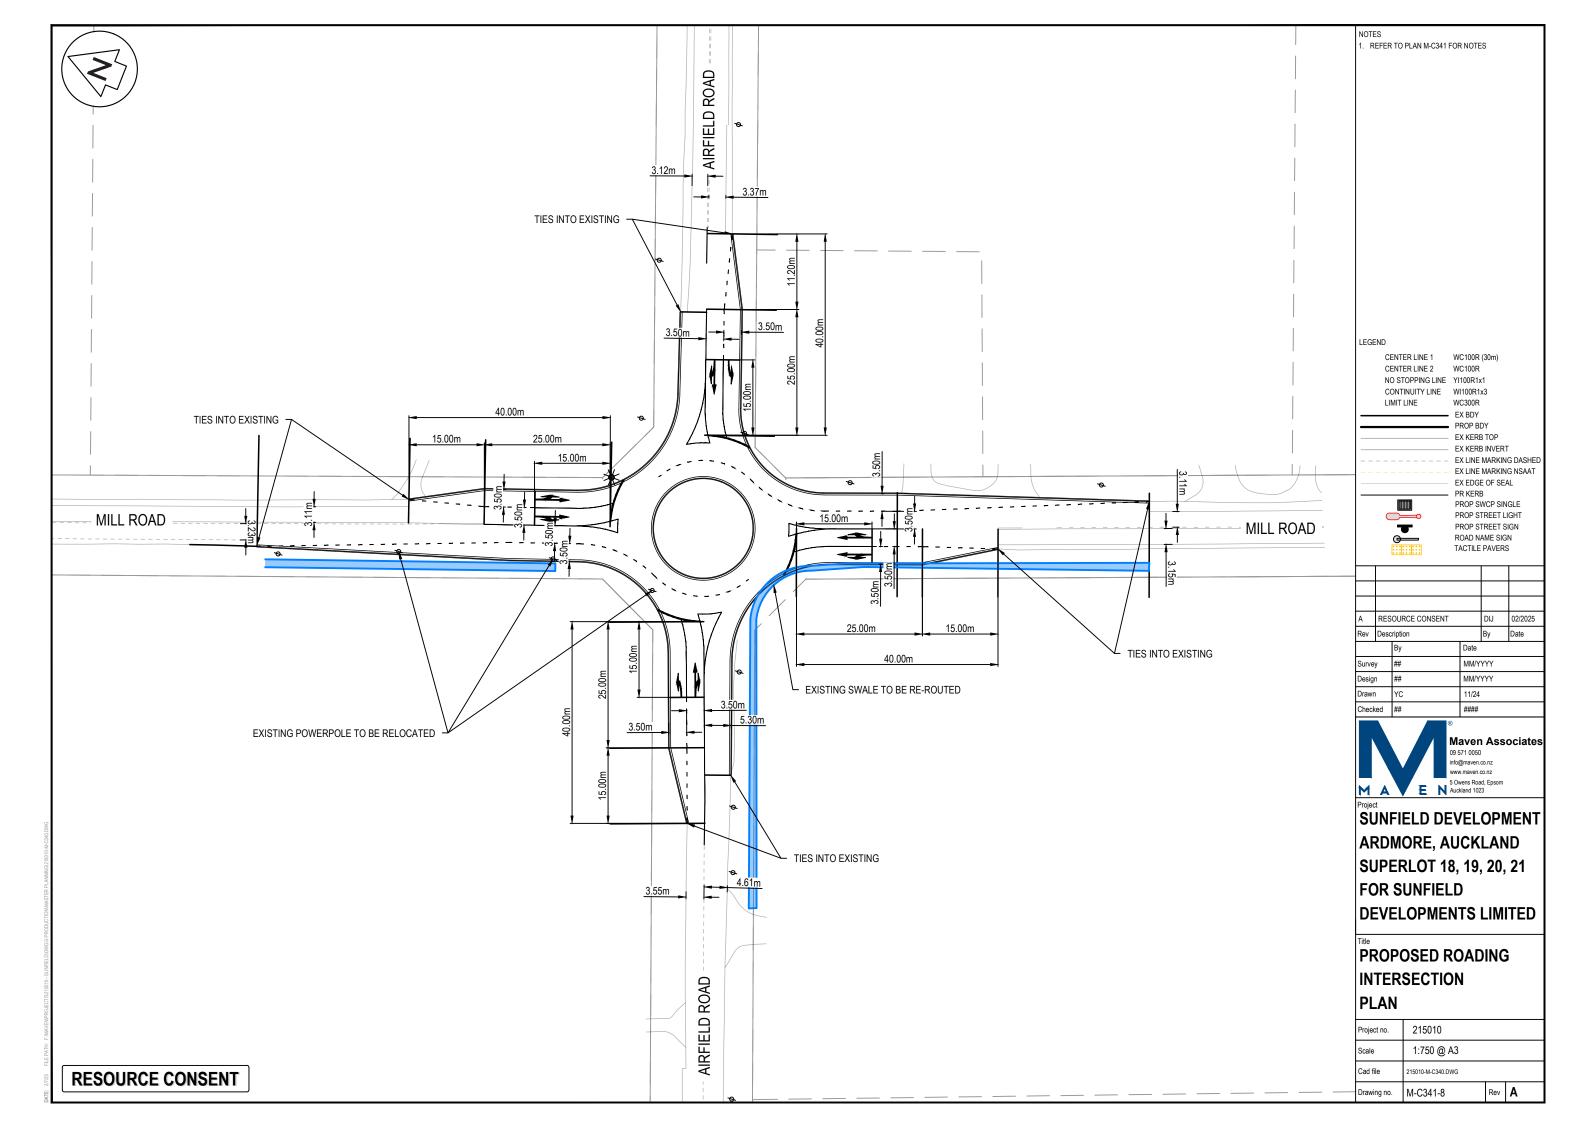

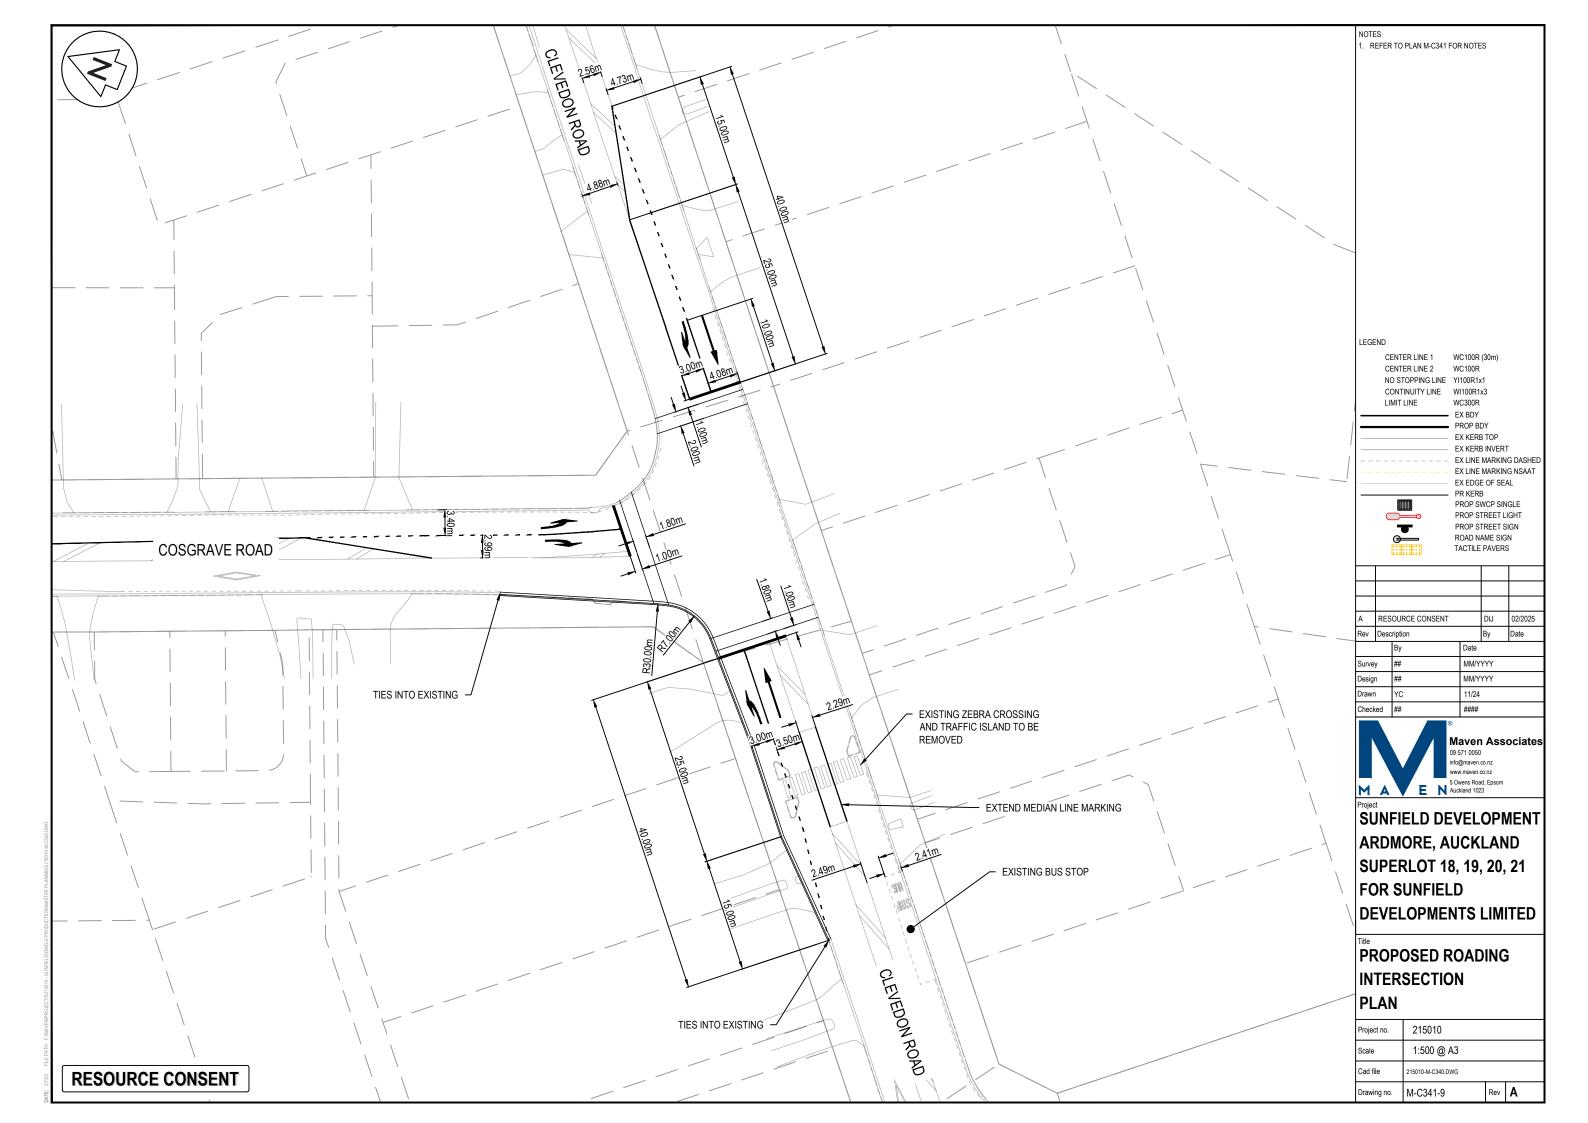

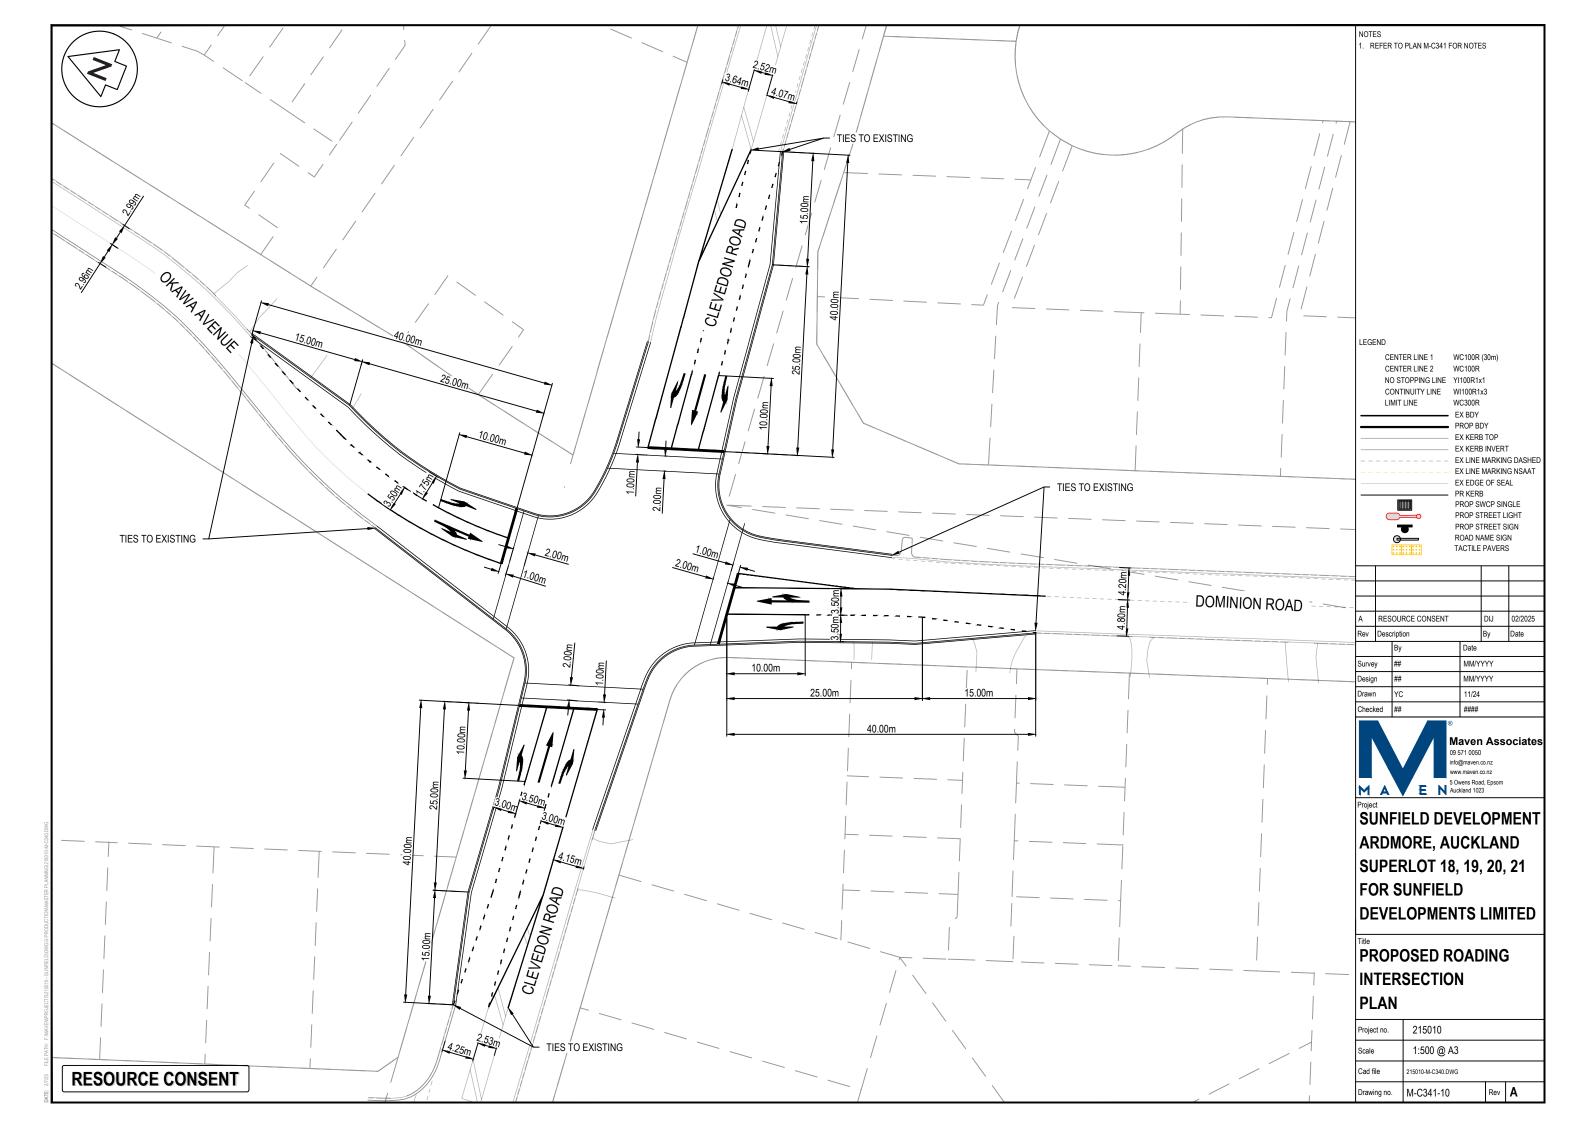


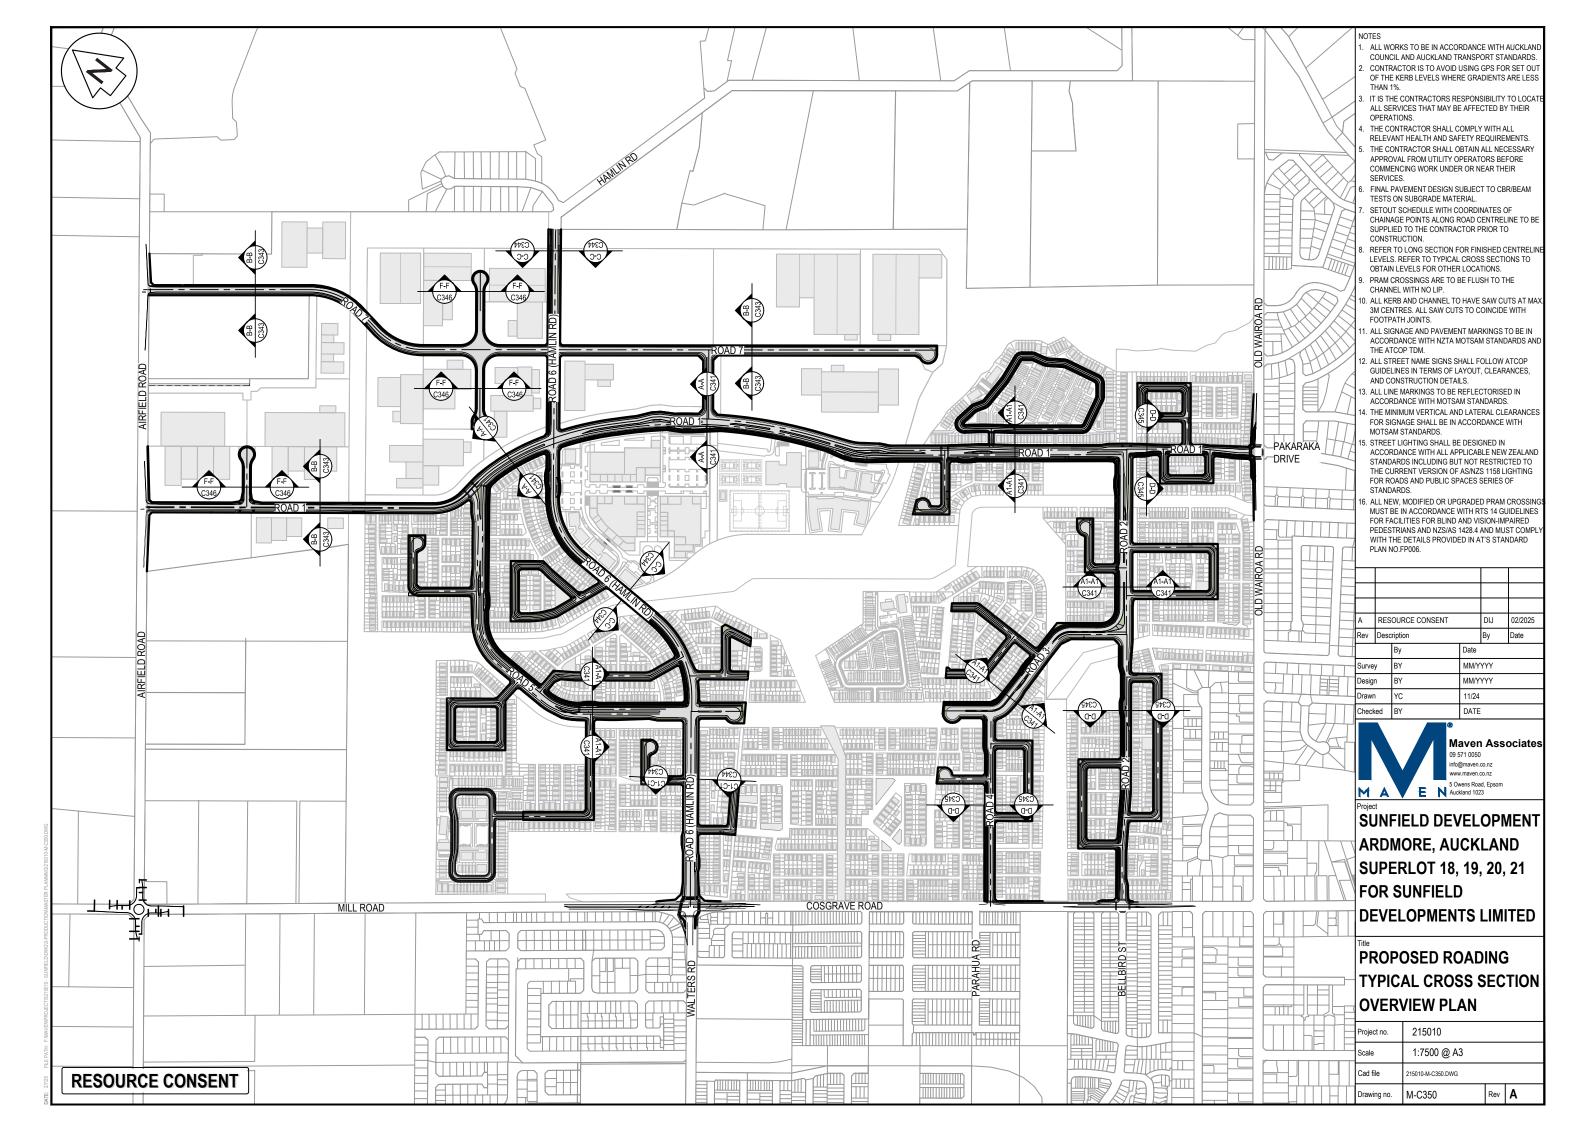

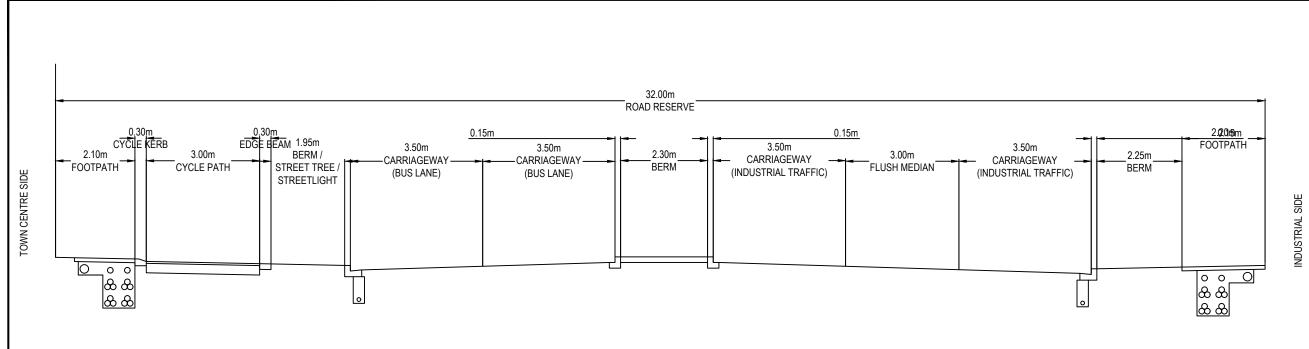



### 32.0m ROAD WITH INDUSTRIAL TRAFFIC & CYCLE & PRIVATE BUSWAY

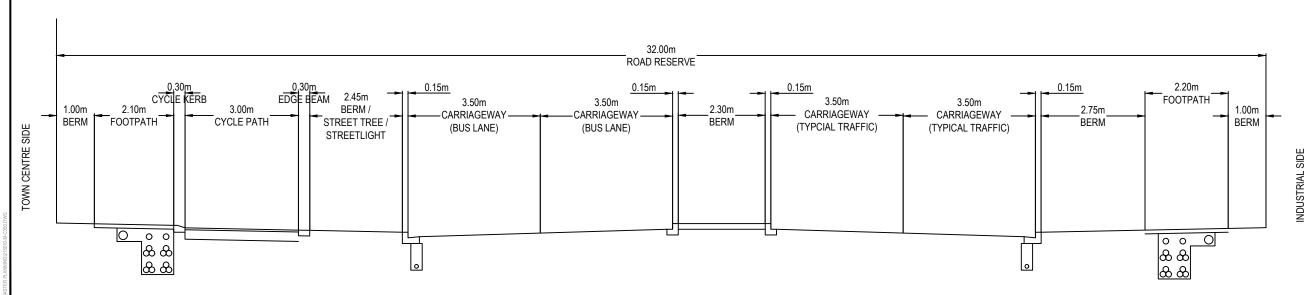

A1-A1 C341

SCALE 1:100 @ A3

32.0m ROAD WITH TYPICAL TRAFFIC & CYCLE & PRIVATE BUSWAY

**RESOURCE CONSENT** 

- ALL WORKS TO BE IN ACCORDANCE WITH AUCKLAN COUNCIL AND AUCKLAND TRANSPORT STANDARDS
- CONTRACTOR IS TO AVOID USING GPS FOR SET OU OF THE KERB LEVELS WHERE GRADIENTS ARE LESS THAN 1%.
- IT IS THE CONTRACTORS RESPONSIBILITY TO LOCAT ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
- 4. THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
- THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.
- 6. FINAL PAVEMENT DESIGN SUBJECT TO CBR/BEAM TESTS ON SUBGRADE MATERIAL.
- 7. SETOUT SCHEDULE WITH COORDINATES OF CHAINAGE POINTS ALONG ROAD CENTRELINE TO BE SUPPLIED TO THE CONTRACTOR PRIOR TO CONSTRUCTION.
- REFER TO LONG SECTION FOR FINISHED CENTRELIN LEVELS. REFER TO TYPICAL CROSS SECTIONS TO OBTAIN LEVELS FOR OTHER LOCATIONS.
- 9. PRAM CROSSINGS ARE TO BE FLUSH TO THE CHANNEL WITH NO LIP.
- 10. ALL KERB AND CHANNEL TO HAVE SAW CUTS AT MAX 3M CENTRES. ALL SAW CUTS TO COINCIDE WITH FOOTPATH JOINTS.
- 11. ALL SIGNAGE AND PAVEMENT MARKINGS TO BE IN ACCORDANCE WITH NZTA MOTSAM STANDARDS AN THE ATCOP TDM.
- 12. ALL STREET NAME SIGNS SHALL FOLLOW ATCOP GUIDELINES IN TERMS OF LAYOUT, CLEARANCES, AND CONSTRUCTION DETAILS.
- 13. ALL LINE MARKINGS TO BE REFLECTORISED IN ACCORDANCE WITH MOTSAM STANDARDS.
- 14. THE MINIMUM VERTICAL AND LATERAL CLEARANCES FOR SIGNAGE SHALL BE IN ACCORDANCE WITH MOTSAM STANDARDS.
- 15. STREET LIGHTING SHALL BE DESIGNED IN ACCORDANCE WITH ALL APPLICABLE NEW ZEALANE STANDARDS INCLUDING BUT NOT RESTRICTED TO THE CURRENT VERSION OF AS/NZS 1158 LIGHTING FOR ROADS AND PUBLIC SPACES SERIES OF STANDARDS.
- 16. ALL NEW, MODIFIED OR UPGRADED PRAM CROSSINGS MUST BE IN ACCORDANCE WITH RTS 14 GUIDELINES FOR FACILITIES FOR BLIND AND VISION-IMPAIRED PEDESTRIANS AND NZS/AS 1428.4 AND MUST COMPLY WITH THE DETAILS PROVIDED IN AT'S STANDARD PLAN NO.FP006.


Α		RESOURCE CONSENT			DIJ	02/2025		
Re	ev Descri		ription	n		Ву	Date	
Г	,		Ву		Date	Date		
Sı	urve	/	BY		MM/Y	MM/YYYY		
De	Design		BY		MM/Y	MM/YYYY		
Dr	Drawn		YC		11/24	11/24		
Cł	neck	ed	BY		DATE	DATE		




SUNFIELD DEVELOPMENT
ARDMORE, AUCKLAND
SUPERLOT 18, 19, 20, 21
FOR SUNFIELD
DEVELOPMENTS LIMITED

PROPOSED ROADING
TYPICAL CROSS SECTION
PLAN

Project no.	215010		
Scale	1:100 @ A3		
Cad file	215010-M-C350.DWG		
Drawing no.	M-C351	Rev	Α

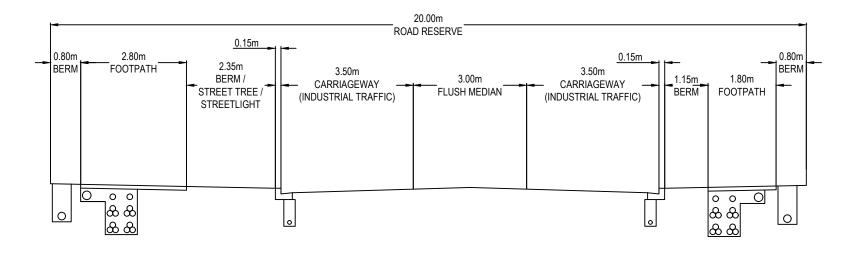



NOTES

- ALL WORKS TO BE IN ACCORDANCE WITH AUCKLAN COUNCIL AND AUCKLAND TRANSPORT STANDARDS.
- CONTRACTOR IS TO AVOID USING GPS FOR SET OUT OF THE KERB LEVELS WHERE GRADIENTS ARE LESS THAN 1%.
- IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
- 4. THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
- THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.
- 6. FINAL PAVEMENT DESIGN SUBJECT TO CBR/BEAM TESTS ON SUBGRADE MATERIAL.
- . SETOUT SCHEDULE WITH COORDINATES OF CHAINAGE POINTS ALONG ROAD CENTRELINE TO BE SUPPLIED TO THE CONTRACTOR PRIOR TO CONSTRUCTION.
- REFER TO LONG SECTION FOR FINISHED CENTRELINI LEVELS. REFER TO TYPICAL CROSS SECTIONS TO OBTAIN LEVELS FOR OTHER LOCATIONS.
- PRAM CROSSINGS ARE TO BE FLUSH TO THE CHANNEL WITH NO LIP.
- 10. ALL KERB AND CHANNEL TO HAVE SAW CUTS AT MAX 3M CENTRES. ALL SAW CUTS TO COINCIDE WITH FOOTPATH JOINTS.
- ALL SIGNAGE AND PAVEMENT MARKINGS TO BE IN ACCORDANCE WITH NZTA MOTSAM STANDARDS AND THE ATCOP TDM.
- 12. ALL STREET NAME SIGNS SHALL FOLLOW ATCOP GUIDELINES IN TERMS OF LAYOUT, CLEARANCES, AND CONSTRUCTION DETAILS.
- 13. ALL LINE MARKINGS TO BE REFLECTORISED IN ACCORDANCE WITH MOTSAM STANDARDS.
- 14. THE MINIMUM VERTICAL AND LATERAL CLEARANCES FOR SIGNAGE SHALL BE IN ACCORDANCE WITH MOTSAM STANDARDS.
- 15. STREET LIGHTING SHALL BE DESIGNED IN ACCORDANCE WITH ALL APPLICABLE NEW ZEALAND STANDARDS INCLUDING BUT NOT RESTRICTED TO THE CURRENT VERSION OF AS/NZS 1158 LIGHTING FOR ROADS AND PUBLIC SPACES SERIES OF STANDARDS.
- 16. ALL NEW, MODIFIED OR UPGRADED PRAM CROSSINGS MUST BE IN ACCORDANCE WITH RTS 14 GUIDELINES FOR FACILITIES FOR BLIND AND VISION-IMPAIRED PEDESTRIANS AND NZS/AS 1428.4 AND MUST COMPLY WITH THE DETAILS PROVIDED IN AT'S STANDARD PLAN NO.FP006.

Α	RES	OURCE CONSENT			DIJ	02/2025
Rev	Desc	ription			Ву	Date
,		Ву	1	Date	ate	
Survey		BY	1	MM/YYYY		
Design		BY	ı	MM/YYYY		
Drawn		YC	-	11/24		
Checl	red	BY	Ti	DATE		



Project


SUNFIELD DEVELOPMENT ARDMORE, AUCKLAND SUPERLOT 18, 19, 20, 21 FOR SUNFIELD DEVELOPMENTS LIMITED

Title


# PROPOSED ROADING TYPICAL CROSS SECTION PLAN

Project no.	215010				
Scale	1:100 @ A3				
Cad file	215010-M-C350.DWG				
Drawing no. M-C352		Rev	Α		

**RESOURCE CONSENT** 

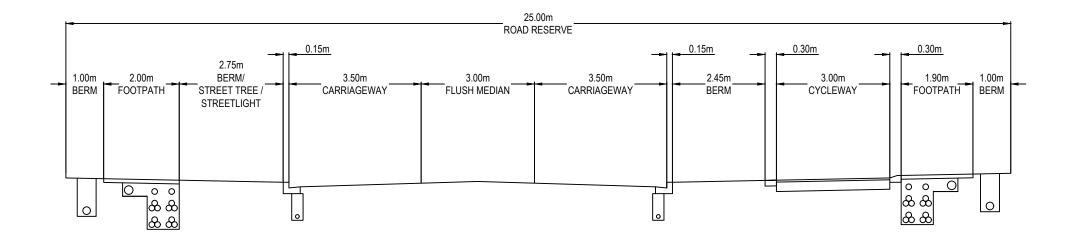



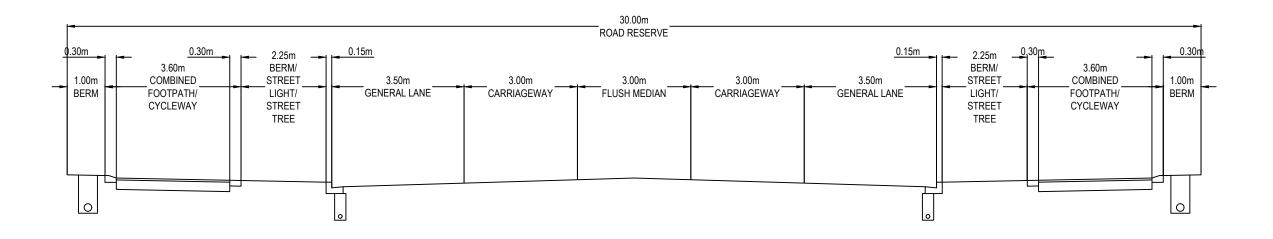



30.0m ROAD WITH INDUSTRIAL TRAFFIC & CYCLE & GENERAL LANES

**RESOURCE CONSENT** 

#### NOTES

- . ALL WORKS TO BE IN ACCORDANCE WITH AUCKLAN COUNCIL AND AUCKLAND TRANSPORT STANDARDS
- CONTRACTOR IS TO AVOID USING GPS FOR SET OUT
   OF THE KERB LEVELS WHERE GRADIENTS ARE LESS
   THAN 1%.
- . IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATI ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
- THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
- THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.
- 6. FINAL PAVEMENT DESIGN SUBJECT TO CBR/BEAM TESTS ON SUBGRADE MATERIAL.
- SETOUT SCHEDULE WITH COORDINATES OF CHAINAGE POINTS ALONG ROAD CENTRELINE TO BE SUPPLIED TO THE CONTRACTOR PRIOR TO CONSTRUCTION.
- REFER TO LONG SECTION FOR FINISHED CENTRELIN LEVELS. REFER TO TYPICAL CROSS SECTIONS TO OBTAIN LEVELS FOR OTHER LOCATIONS.
- PRAM CROSSINGS ARE TO BE FLUSH TO THE CHANNEL WITH NO LIP.
- 10. ALL KERB AND CHANNEL TO HAVE SAW CUTS AT MAY 3M CENTRES. ALL SAW CUTS TO COINCIDE WITH FOOTPATH JOINTS.
- 11. ALL SIGNAGE AND PAVEMENT MARKINGS TO BE IN ACCORDANCE WITH NZTA MOTSAM STANDARDS AN THE ATCOP TDM.
- 12. ALL STREET NAME SIGNS SHALL FOLLOW ATCOP GUIDELINES IN TERMS OF LAYOUT, CLEARANCES, AND CONSTRUCTION DETAILS.
- 13. ALL LINE MARKINGS TO BE REFLECTORISED IN ACCORDANCE WITH MOTSAM STANDARDS.
- THE MINIMUM VERTICAL AND LATERAL CLEARANCES
   FOR SIGNAGE SHALL BE IN ACCORDANCE WITH
   MOTSAM STANDARDS.
- 15. STREET LIGHTING SHALL BE DESIGNED IN ACCORDANCE WITH ALL APPLICABLE NEW ZEALAND STANDARDS INCLUDING BUT NOT RESTRICTED TO THE CURRENT VERSION OF AS/NZS 1158 LIGHTING FOR ROADS AND PUBLIC SPACES SERIES OF STANDARDS.
- 16. ALL NEW, MODIFIED OR UPGRADED PRAM CROSSINGS MUST BE IN ACCORDANCE WITH RTS 14 GUIDELINES FOR FACILITIES FOR BLIND AND VISION-IMPAIRED PEDESTRIANS AND NZS/AS 1428.4 AND MUST COMPLY WITH THE DETAILS PROVIDED IN AT'S STANDARD PLAN NO.FP006.

Α	RES	OURCE CONSEN	RCE CONSENT		DIJ	02/2025
Rev	Desc	ription			Ву	Date
		Ву		Date		
Surve	у	BY		MM/YYYY		
Design		BY		MM/YYYY		
Drawn		YC		11/24		
Check	ced	BY		DATE		




Project

SUNFIELD DEVELOPMENT ARDMORE, AUCKLAND SUPERLOT 18, 19, 20, 21 FOR SUNFIELD DEVELOPMENTS LIMITED

PROPOSED ROADING
TYPICAL CROSS SECTION
PLAN

Project no.	215010				
Scale	1:100 @ A3				
Cad file 215010-M-C350.DWG					
Drawing no.	M-C353	Rev	Α		

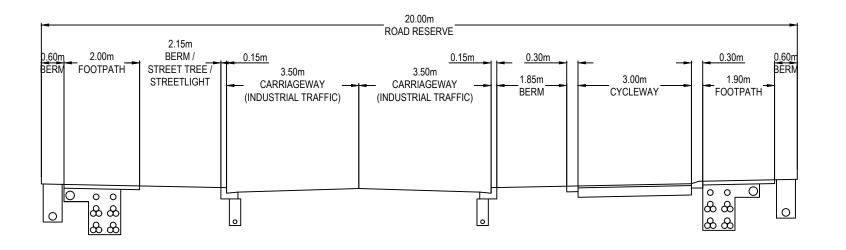



NOTES

- ALL WORKS TO BE IN ACCORDANCE WITH AUCKLAN COUNCIL AND AUCKLAND TRANSPORT STANDARDS.
- CONTRACTOR IS TO AVOID USING GPS FOR SET OUT OF THE KERB LEVELS WHERE GRADIENTS ARE LESS THAN 1%.
- IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
- THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
   THE CONTRACTOR SHALL OBTAIN ALL NECESSARY
- THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.
- 6. FINAL PAVEMENT DESIGN SUBJECT TO CBR/BEAM TESTS ON SUBGRADE MATERIAL.
- SETOUT SCHEDULE WITH COORDINATES OF CHAINAGE POINTS ALONG ROAD CENTRELINE TO BE SUPPLIED TO THE CONTRACTOR PRIOR TO CONSTRUCTION.
- REFER TO LONG SECTION FOR FINISHED CENTRELINI LEVELS. REFER TO TYPICAL CROSS SECTIONS TO OBTAIN LEVELS FOR OTHER LOCATIONS.
- PRAM CROSSINGS ARE TO BE FLUSH TO THE CHANNEL WITH NO LIP.
- 10. ALL KERB AND CHANNEL TO HAVE SAW CUTS AT MAX 3M CENTRES. ALL SAW CUTS TO COINCIDE WITH FOOTPATH JOINTS.
- 11. ALL SIGNAGE AND PAVEMENT MARKINGS TO BE IN ACCORDANCE WITH NZTA MOTSAM STANDARDS AN THE ATCOP TDM.
- 12. ALL STREET NAME SIGNS SHALL FOLLOW ATCOP GUIDELINES IN TERMS OF LAYOUT, CLEARANCES, AND CONSTRUCTION DETAILS.
- 13. ALL LINE MARKINGS TO BE REFLECTORISED IN ACCORDANCE WITH MOTSAM STANDARDS.
- 14. THE MINIMUM VERTICAL AND LATERAL CLEARANCES FOR SIGNAGE SHALL BE IN ACCORDANCE WITH MOTSAM STANDARDS.
- 15. STREET LIGHTING SHALL BE DESIGNED IN ACCORDANCE WITH ALL APPLICABLE NEW ZEALAND STANDARDS INCLUDING BUT NOT RESTRICTED TO THE CURRENT VERSION OF AS/NZS 1158 LIGHTING FOR ROADS AND PUBLIC SPACES SERIES OF STANDARDS.
- 16. ALL NEW, MODIFIED OR UPGRADED PRAM CROSSING MUST BE IN ACCORDANCE WITH RTS 14 GUIDELINES FOR FACILITIES FOR BLIND AND VISION-IMPAIRED PEDESTRIANS AND NZS/AS 1428.4 AND MUST COMPL WITH THE DETAILS PROVIDED IN AT'S STANDARD PLAN NO.FP006.

A RES		OURCE CONSENT		DIJ	02/2025	
Rev Desc		ription			Ву	Date
,		Ву		Date		
Surve	y	BY		MM/YYYY		
Design		BY		MM/YYYY		
Drawn		YC		11/24		
Check	ed	BY		DATE		



Project


SUNFIELD DEVELOPMENT ARDMORE, AUCKLAND SUPERLOT 18, 19, 20, 21 FOR SUNFIELD DEVELOPMENTS LIMITED

Title


# PROPOSED ROADING TYPICAL CROSS SECTION PLAN

Project no.	215010		
Scale 1:100 @ A3			
Cad file 215010-M-C350.DWG			
Drawing no. M-C354		Rev	Α

**RESOURCE CONSENT** 

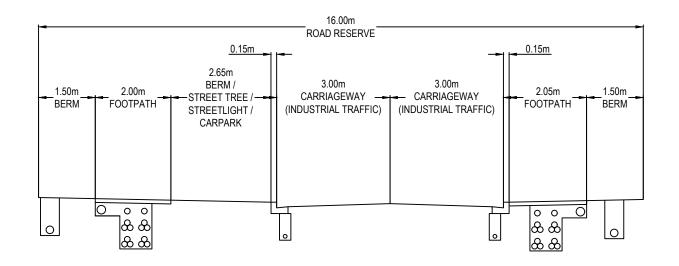



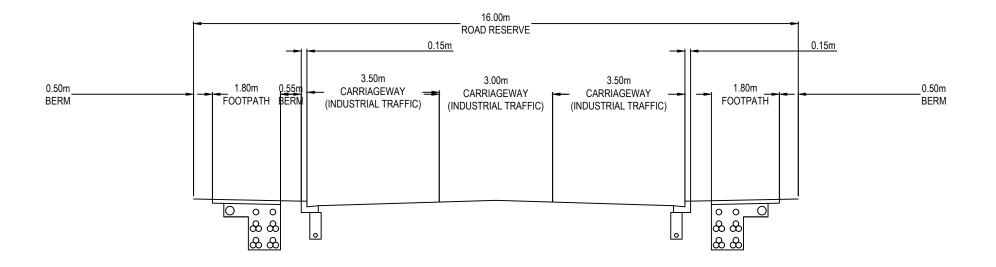



- ALL WORKS TO BE IN ACCORDANCE WITH ALICKLAN COUNCIL AND AUCKLAND TRANSPORT STANDARDS
- CONTRACTOR IS TO AVOID USING GPS FOR SET OU OF THE KERB LEVELS WHERE GRADIENTS ARE LESS
- IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATI ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
- THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
- THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.
- FINAL PAVEMENT DESIGN SUBJECT TO CBR/BEAM TESTS ON SUBGRADE MATERIAL.
- SETOUT SCHEDULE WITH COORDINATES OF CHAINAGE POINTS ALONG ROAD CENTRELINE TO BE SUPPLIED TO THE CONTRACTOR PRIOR TO CONSTRUCTION.
- 3. REFER TO LONG SECTION FOR FINISHED CENTRELIN LEVELS. REFER TO TYPICAL CROSS SECTIONS TO OBTAIN LEVELS FOR OTHER LOCATIONS.
- PRAM CROSSINGS ARE TO BE FLUSH TO THE CHANNEL WITH NO LIP.
- 0. ALL KERB AND CHANNEL TO HAVE SAW CUTS AT MAX 3M CENTRES. ALL SAW CUTS TO COINCIDE WITH FOOTPATH JOINTS.
- 1. ALL SIGNAGE AND PAVEMENT MARKINGS TO BE IN ACCORDANCE WITH NZTA MOTSAM STANDARDS AN THE ATCOP TDM.
- 12. ALL STREET NAME SIGNS SHALL FOLLOW ATCOP GUIDELINES IN TERMS OF LAYOUT, CLEARANCES, AND CONSTRUCTION DETAILS.
- 13. ALL LINE MARKINGS TO BE REFLECTORISED IN ACCORDANCE WITH MOTSAM STANDARDS.
- 14. THE MINIMUM VERTICAL AND LATERAL CLEARANCES FOR SIGNAGE SHALL BE IN ACCORDANCE WITH
- 15. STREET LIGHTING SHALL BE DESIGNED IN ACCORDANCE WITH ALL APPLICABLE NEW ZEALAND STANDARDS INCLUDING BUT NOT RESTRICTED TO THE CURRENT VERSION OF AS/NZS 1158 LIGHTING FOR ROADS AND PUBLIC SPACES SERIES OF STANDARDS.
- ALL NEW, MODIFIED OR UPGRADED PRAM CROSSING MUST BE IN ACCORDANCE WITH RTS 14 GUIDELINES FOR FACILITIES FOR BLIND AND VISION-IMPAIRED PEDESTRIANS AND NZS/AS 1428 4 AND MUST COMPI WITH THE DETAILS PROVIDED IN AT'S STANDARD PLAN NO.FP006.

Α	RESOURCE CONSENT		ISENT		DIJ	02/2025
Rev	Desc	ription	on		Ву	Date
		Ву		Date		
Surve	у	BY		MM/YYYY		
Desig	n	BY		MM/YYYY		
Drawn		YC		11/24		
Check	ced	BY		DATE		



SUNFIELD DEVELOPMENT ARDMORE, AUCKLAND SUPERLOT 18, 19, 20, 21 FOR SUNFIELD **DEVELOPMENTS LIMITED** 

### PROPOSED ROADING TYPICAL CROSS SECTION PLAN

Project no.	215010		
Scale	1:100 @ A3		
Cad file 215010-M-C350.DWG			
Drawing no.	M-C355	Rev	Α

**RESOURCE CONSENT** 

