

KAHIKATEA DRIVE

HIGGINS ROAD

WICKHAM STREET

LATHAM COURT

ARTIFICIAL
STORMWATER
WETLAND 1

STAGE 1A

NZTA
ROAD
CORRIDOR

ARTIFICIAL STORMWATER WETLAND 3

STAGE 3

RAILWAY

LOT 1 DPS 51437

STAGE 1B

NZTA
ROAD
CORRIDOR

STAGE 2

ARTIFICIAL STORMWATER WETLAND 2

LOT 2 DPS 51437

PART LOT 2 DPS 4764

- NOTES
1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL COUNCIL EROSION AND SEDIMENT CONTROL: GUIDELINES FOR SOIL DISTURBING ACTIVITIES TR 2009/02.
 2. COORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000
 3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
 4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
 5. THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
 6. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.
 7. CONTRACTOR SHALL PROVIDE AS-BUILT OF WORKING SEDIMENT CONTROL DEVICES AND CONFIRMATION OF POND/DECENT VOLUMES TO ENGINEER.

LEGEND

- EX BDY
- PROP BDY
- PR MAJOR CONTOUR
- PR MINOR CONTOUR

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
Survey	MAVEN		05/2025
Design	MKS		06/2026
Drawn	MKS		06/2026
Checked	SM		09/2026



Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
19 Kaimiro Street, Pukete
Hamilton 3200
New Zealand

Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED
CONTOUR
OVERVIEW PLAN**


Project no.	298002		
Scale	1:5000 @ A3		
Cad file	298002-11-C200 EARTHWORKS.DWG		
Drawing no.	C200	Rev	A

RESOURCE CONSENT



HIGGINS ROAD

WICKHAM STREET



ARTIFICIAL
STORMWATER
WETLAND 1

37.00

35.60

40.80

40.20

40.00

40.00

38.00

LOT 1 DPS 51437

NOTES

1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL COUNCIL EROSION AND SEDIMENT CONTROL: GUIDELINES FOR SOIL DISTURBING ACTIVITIES TR 2009/02.
2. COORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000
3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
5. THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
6. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.
7. CONTRACTOR SHALL PROVIDE AS-BUILT OF WORKING SEDIMENT CONTROL DEVICES AND CONFIRMATION OF POND/DECENT VOLUMES TO ENGINEER.

LEGEND

- EX BDY
- PROP BDY
- == PR MAJOR CONTOUR
- == PR MINOR CONTOUR

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
	By	Date	
Survey	MAVEN	05/2025	
Design	MKS	06/2026	
Drawn	MKS	06/2026	
Checked	SM	09/2026	




Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
19 Kaimiro Street, Pukete
Hamilton 3200
New Zealand

Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED
CONTOUR PLAN
STAGE 1A**

Project no.	298002		
Scale	1:2000 @ A3		
Cad file	298002-11-C200 EARTHWORKS.DWG		
Drawing no.	C200-1	Rev	A

RESOURCE CONSENT



LOT 1 DPS 51437

PART LOT 2 DPS 4764

LOT 2 DPS 51437

ARTIFICIAL STORMWATER WETLAND 2

RESOURCE CONSENT

- NOTES
1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL COUNCIL EROSION AND SEDIMENT CONTROL: GUIDELINES FOR SOIL DISTURBING ACTIVITIES TR 2009/02.
 2. COORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000
 3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
 4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
 5. THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
 6. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.
 7. CONTRACTOR SHALL PROVIDE AS-BUILT OF WORKING SEDIMENT CONTROL DEVICES AND CONFIRMATION OF POND/DECENT VOLUMES TO ENGINEER.

LEGEND

---	EX BDY
---	PROP BDY
---	PR MAJOR CONTOUR
---	PR MINOR CONTOUR

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
		By	Date
Survey	MAVEN		05/2025
Design	MKS		06/2026
Drawn	MKS		06/2026
Checked	SM		09/2026



Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
19 Kaimiro Street, Pukete
Hamilton 3200
New Zealand


Project

**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title

**PROPOSED
CONTOUR PLAN
STAGE 1B**

Project no.	298002		
Scale	1:2500 @ A3		
Cad file	298002-11-C200 EARTHWORKS.DWG		
Drawing no.	C200-2	Rev	A

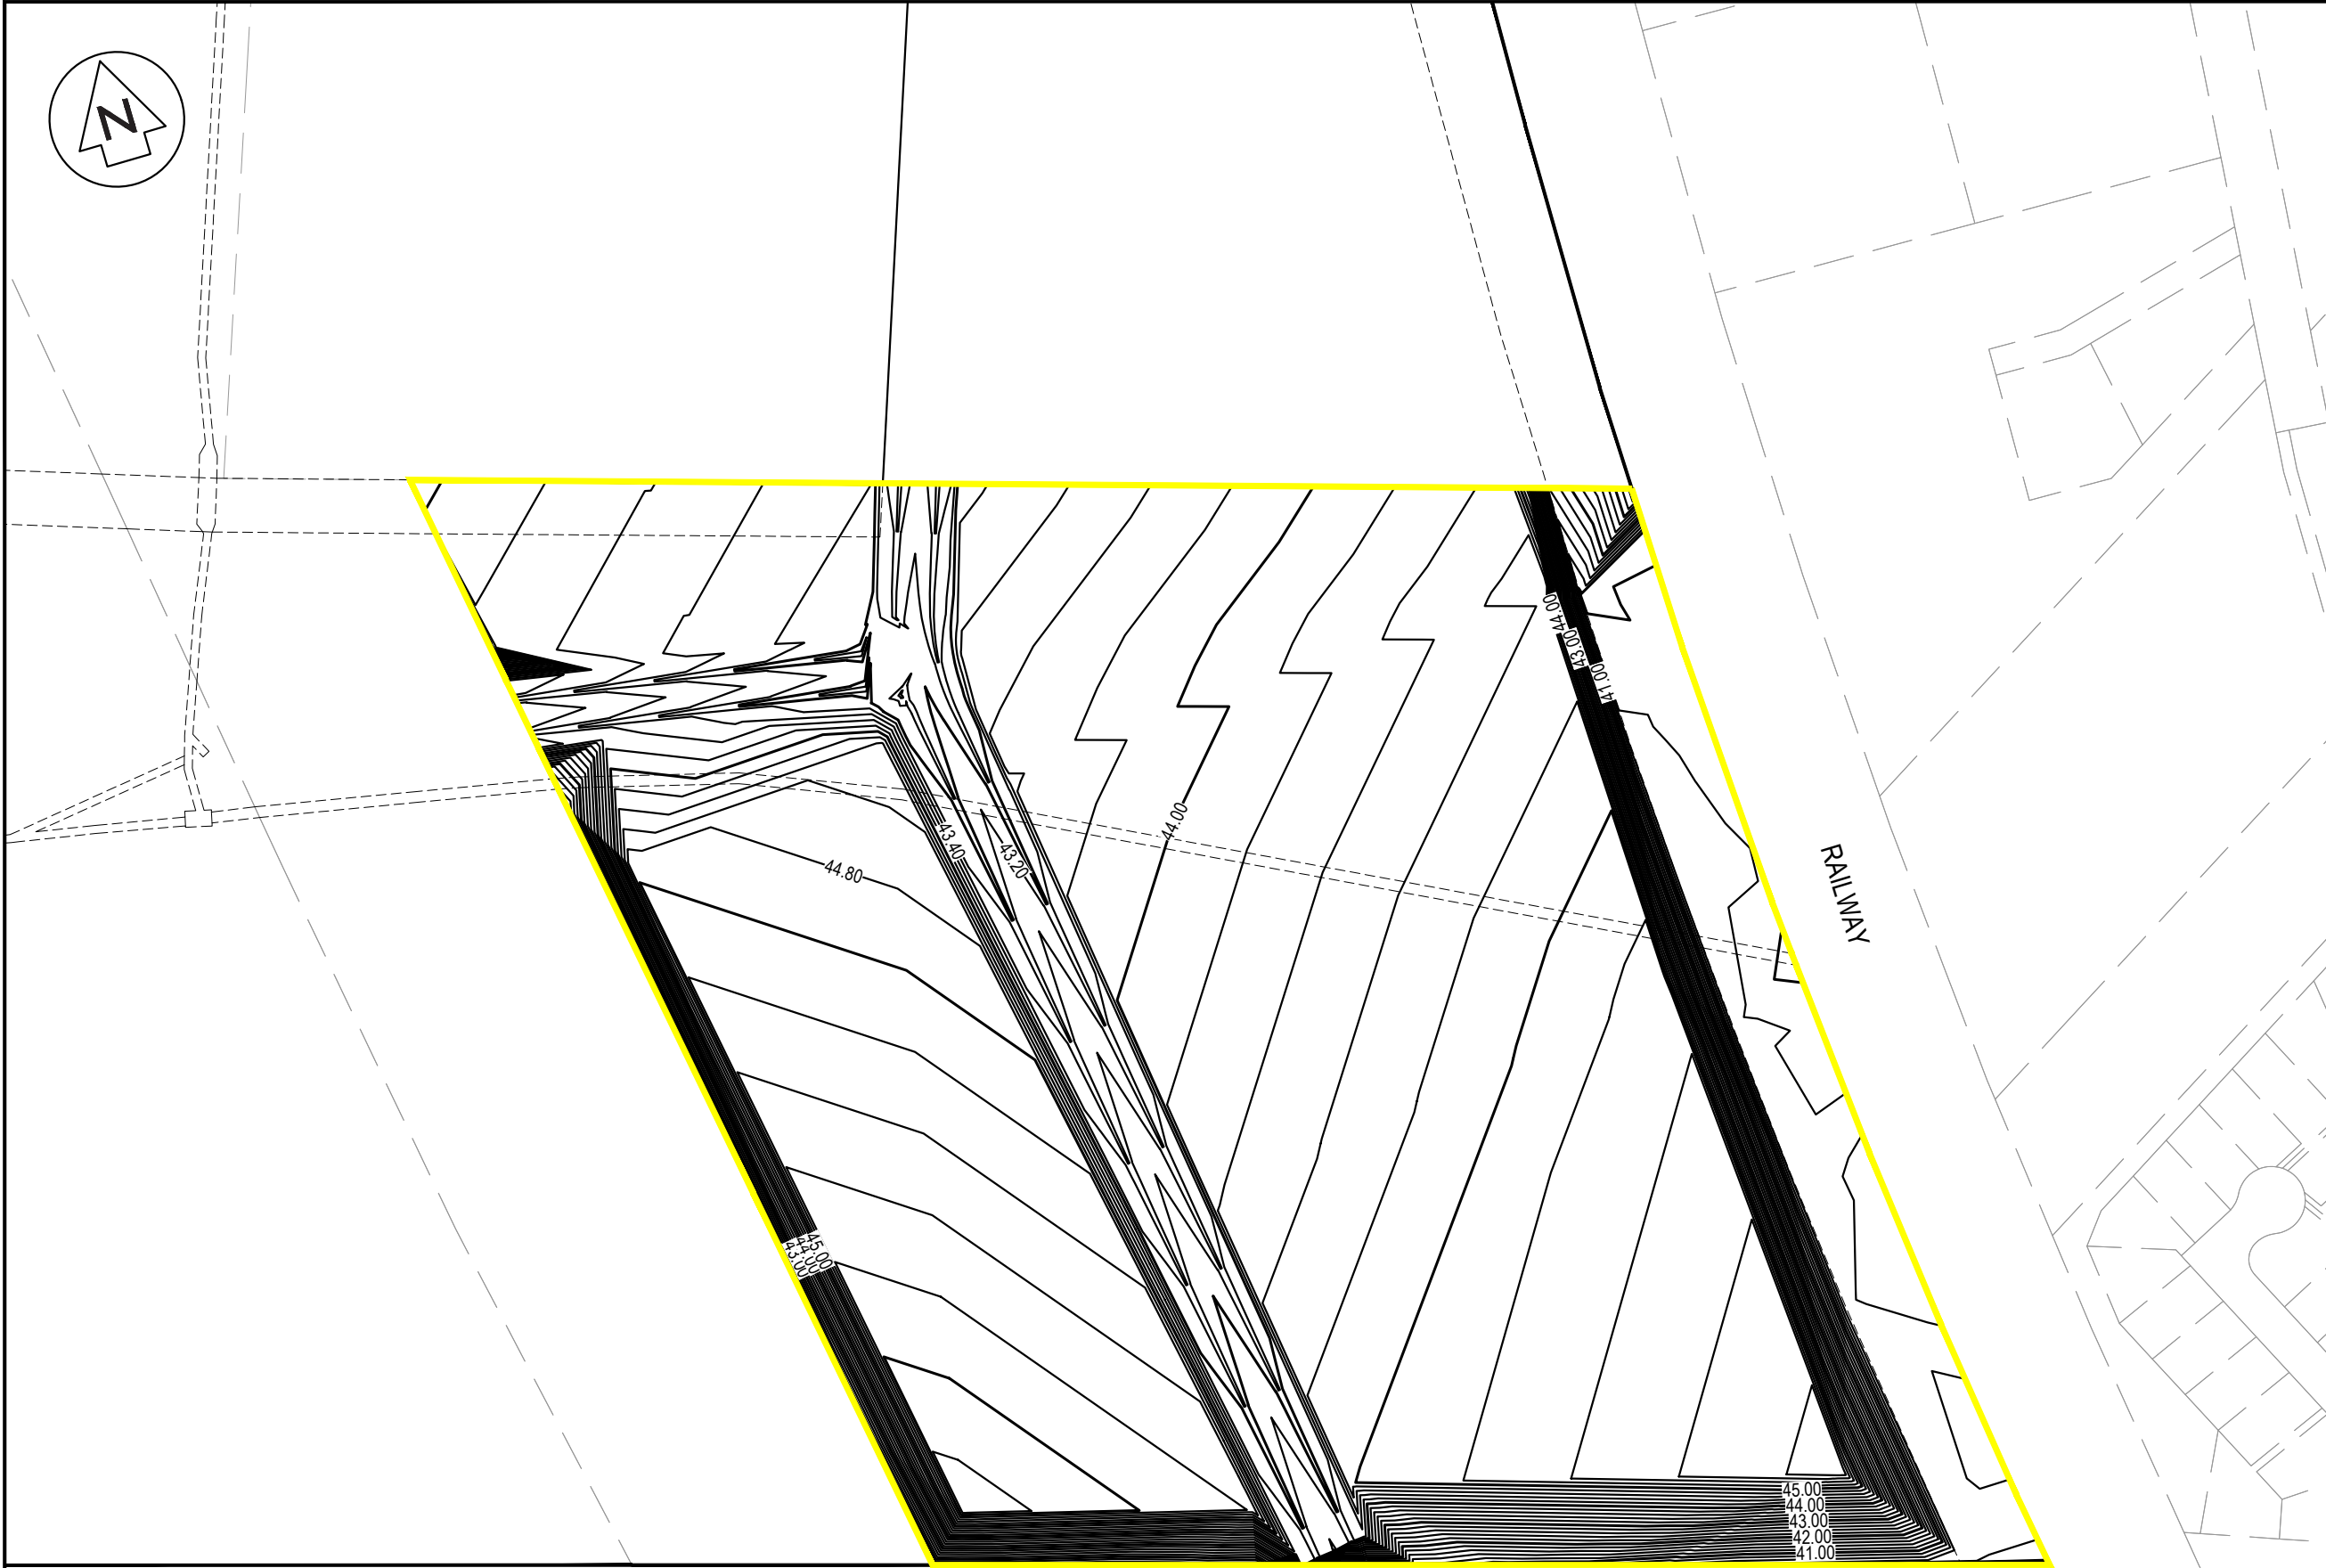

- NOTES
1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL COUNCIL EROSION AND SEDIMENT CONTROL: GUIDELINES FOR SOIL DISTURBING ACTIVITIES TR 2009/02.
 2. COORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000
 3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
 4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
 5. THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
 6. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.
 7. CONTRACTOR SHALL PROVIDE AS-BUILT OF WORKING SEDIMENT CONTROL DEVICES AND CONFIRMATION OF POND/DECENT VOLUMES TO ENGINEER.

LEGEND

---	EX BDY
---	PROP BDY
---	PR MAJOR CONTOUR
---	PR MINOR CONTOUR

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
		By	Date
Survey	MAVEN		05/2025
Design	MKS		06/2026
Drawn	MKS		06/2026
Checked	SM		09/2026



Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
19 Kaimiro Street, Pukete
Hamilton 3200
New Zealand



Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED
CONTOUR PLAN
STAGE 2**

Project no.	298002		
Scale	1:2500 @ A3		
Cad file	298002-11-C200 EARTHWORKS.DWG		
Drawing no.	C200-3	Rev	A

RESOURCE CONSENT

LOT 2 DPS 51437

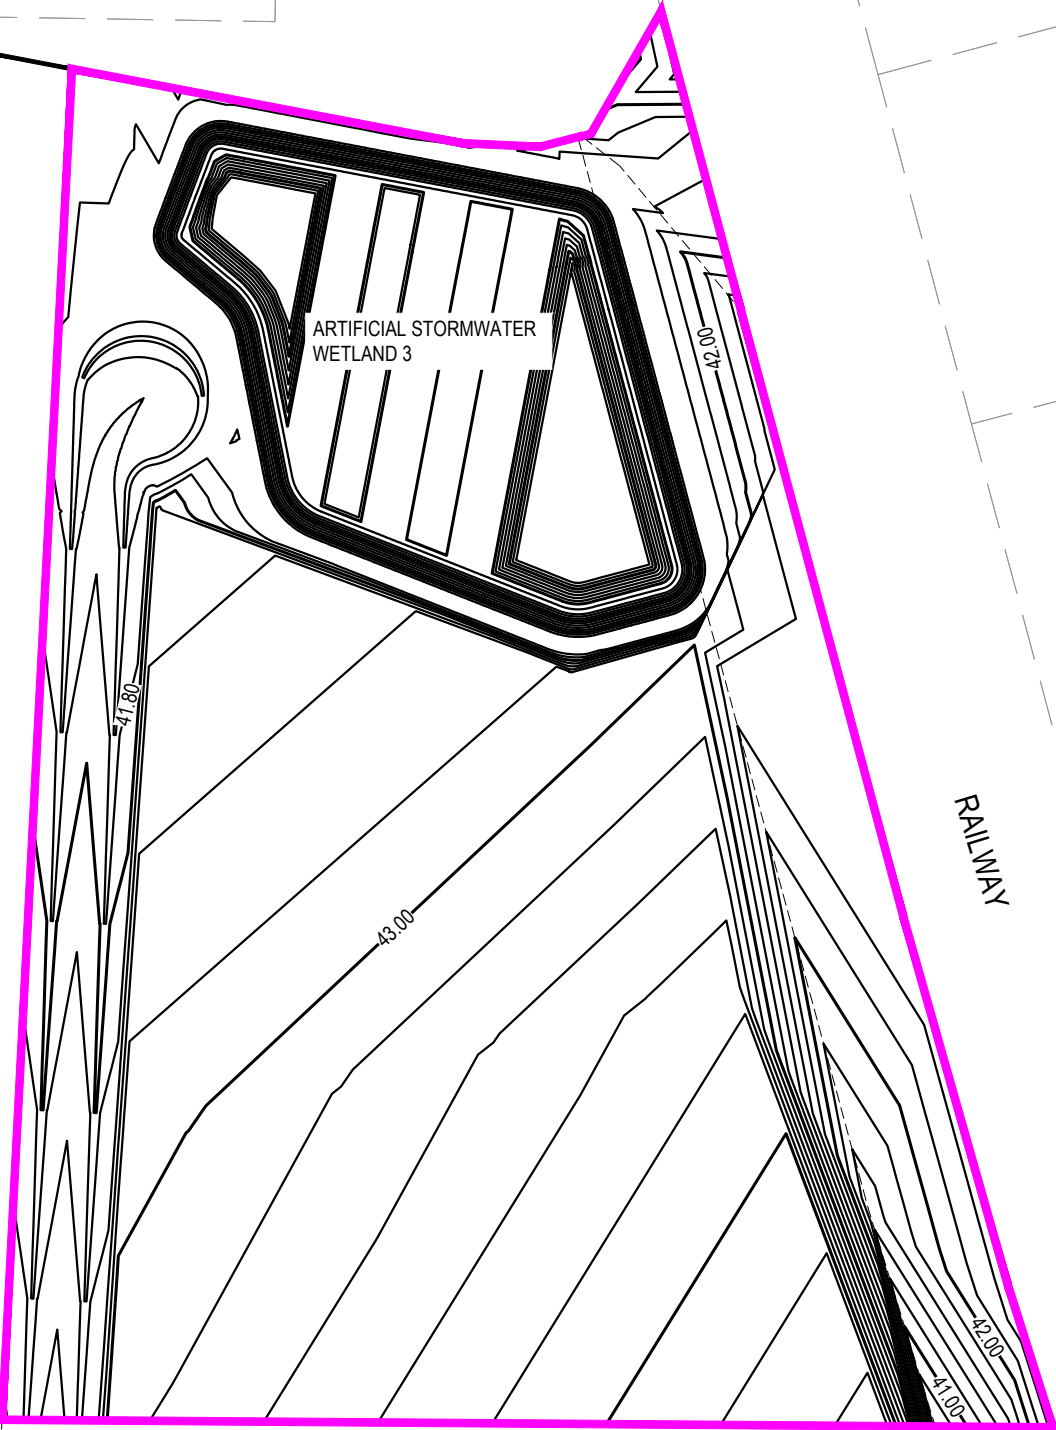

- NOTES
1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL COUNCIL EROSION AND SEDIMENT CONTROL: GUIDELINES FOR SOIL DISTURBING ACTIVITIES TR 2009/02.
 2. COORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000
 3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
 4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
 5. THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
 6. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.
 7. CONTRACTOR SHALL PROVIDE AS-BUILT OF WORKING SEDIMENT CONTROL DEVICES AND CONFIRMATION OF POND/DECENT VOLUMES TO ENGINEER.

LEGEND

---	EX BDY
---	PROP BDY
---	PR MAJOR CONTOUR
---	PR MINOR CONTOUR

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
		By	Date
Survey	MAVEN		05/2025
Design	MKS		06/2026
Drawn	MKS		06/2026
Checked	SM		09/2026



Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
19 Kaimiro Street, Pukete
Hamilton 3200
New Zealand

Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED
CONTOUR PLAN
STAGE 3**

Project no.	298002		
Scale	1:2000 @ A3		
Cad file	298002-11-C200 EARTHWORKS.DWG		
Drawing no.	C200-4	Rev	A

RESOURCE CONSENT



WICKHAM STREET

LATHAM COURT


RAILWAY

LOT 1 DPS 51437

PART LOT 2 DPS 4764

LOT 2 DPS 51437

NZTA
ROAD
CORRIDOR

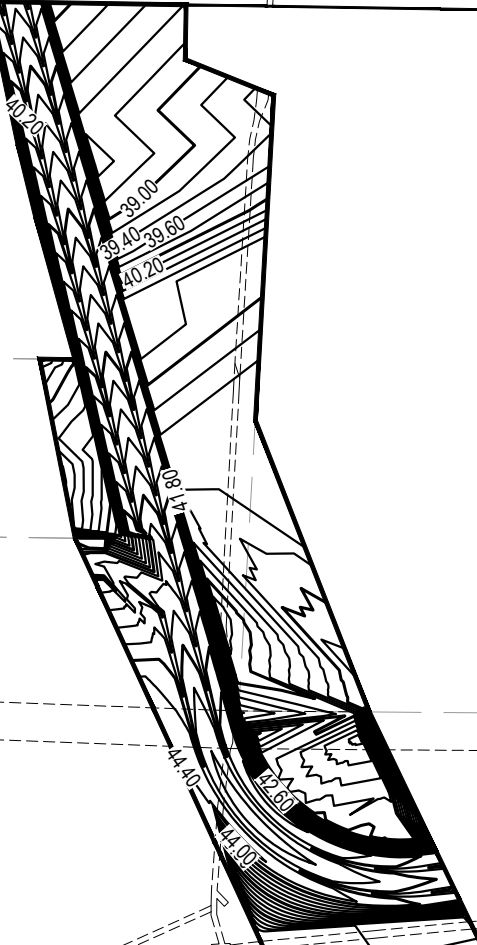

- NOTES
1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL COUNCIL EROSION AND SEDIMENT CONTROL: GUIDELINES FOR SOIL DISTURBING ACTIVITIES TR 2009/02.
 2. COORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000
 3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
 4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
 5. THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
 6. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.
 7. CONTRACTOR SHALL PROVIDE AS-BUILT OF WORKING SEDIMENT CONTROL DEVICES AND CONFIRMATION OF POND/DECENT VOLUMES TO ENGINEER.

LEGEND

---	EX BDY
---	PROP BDY
---	PR MAJOR CONTOUR
---	PR MINOR CONTOUR

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
		By	Date
Survey	MAVEN		05/2025
Design	MKS		06/2026
Drawn	MKS		06/2026
Checked	SM		09/2026



Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
19 Kaimiro Street, Pukete
Hamilton 3200
New Zealand

Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED
CONTOUR PLAN
STAGE HSL**

Project no.	298002		
Scale	1:4000 @ A3		
Cad file	298002-11-C200 EARTHWORKS.DWG		
Drawing no.	C200-5	Rev	A

RESOURCE CONSENT



- NOTES
1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL COUNCIL EROSION AND SEDIMENT CONTROL: GUIDELINES FOR SOIL DISTURBING ACTIVITIES TR 2009/02.
 2. COORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000
 3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
 4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
 5. THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
 6. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.
 7. CONTRACTOR SHALL PROVIDE AS-BUILT OF WORKING SEDIMENT CONTROL DEVICES AND CONFIRMATION OF POND/DECENT VOLUMES TO ENGINEER.

LEGEND

---	EX BDY
---	PROP BDY
---	PR MAJOR CONTOUR
---	PR MINOR CONTOUR

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
Survey	MAVEN		05/2025
Design	MKS		07/2026
Drawn	MKS		07/2026
Checked	SM		09/2026

M **A** **E** **N** [®]

Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
19 Kaimiro Street, Pukete
Hamilton 3200
New Zealand

Project


**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title

**PROPOSED
CONTOUR PLAN
STAGE HSL OPTION 2**

Project no.	298002		
Scale	1:4000 @ A3		
Cad file	298002-11-C200 EARTHWORKS.DWG		
Drawing no.	C200-6	Rev	A

RESOURCE CONSENT

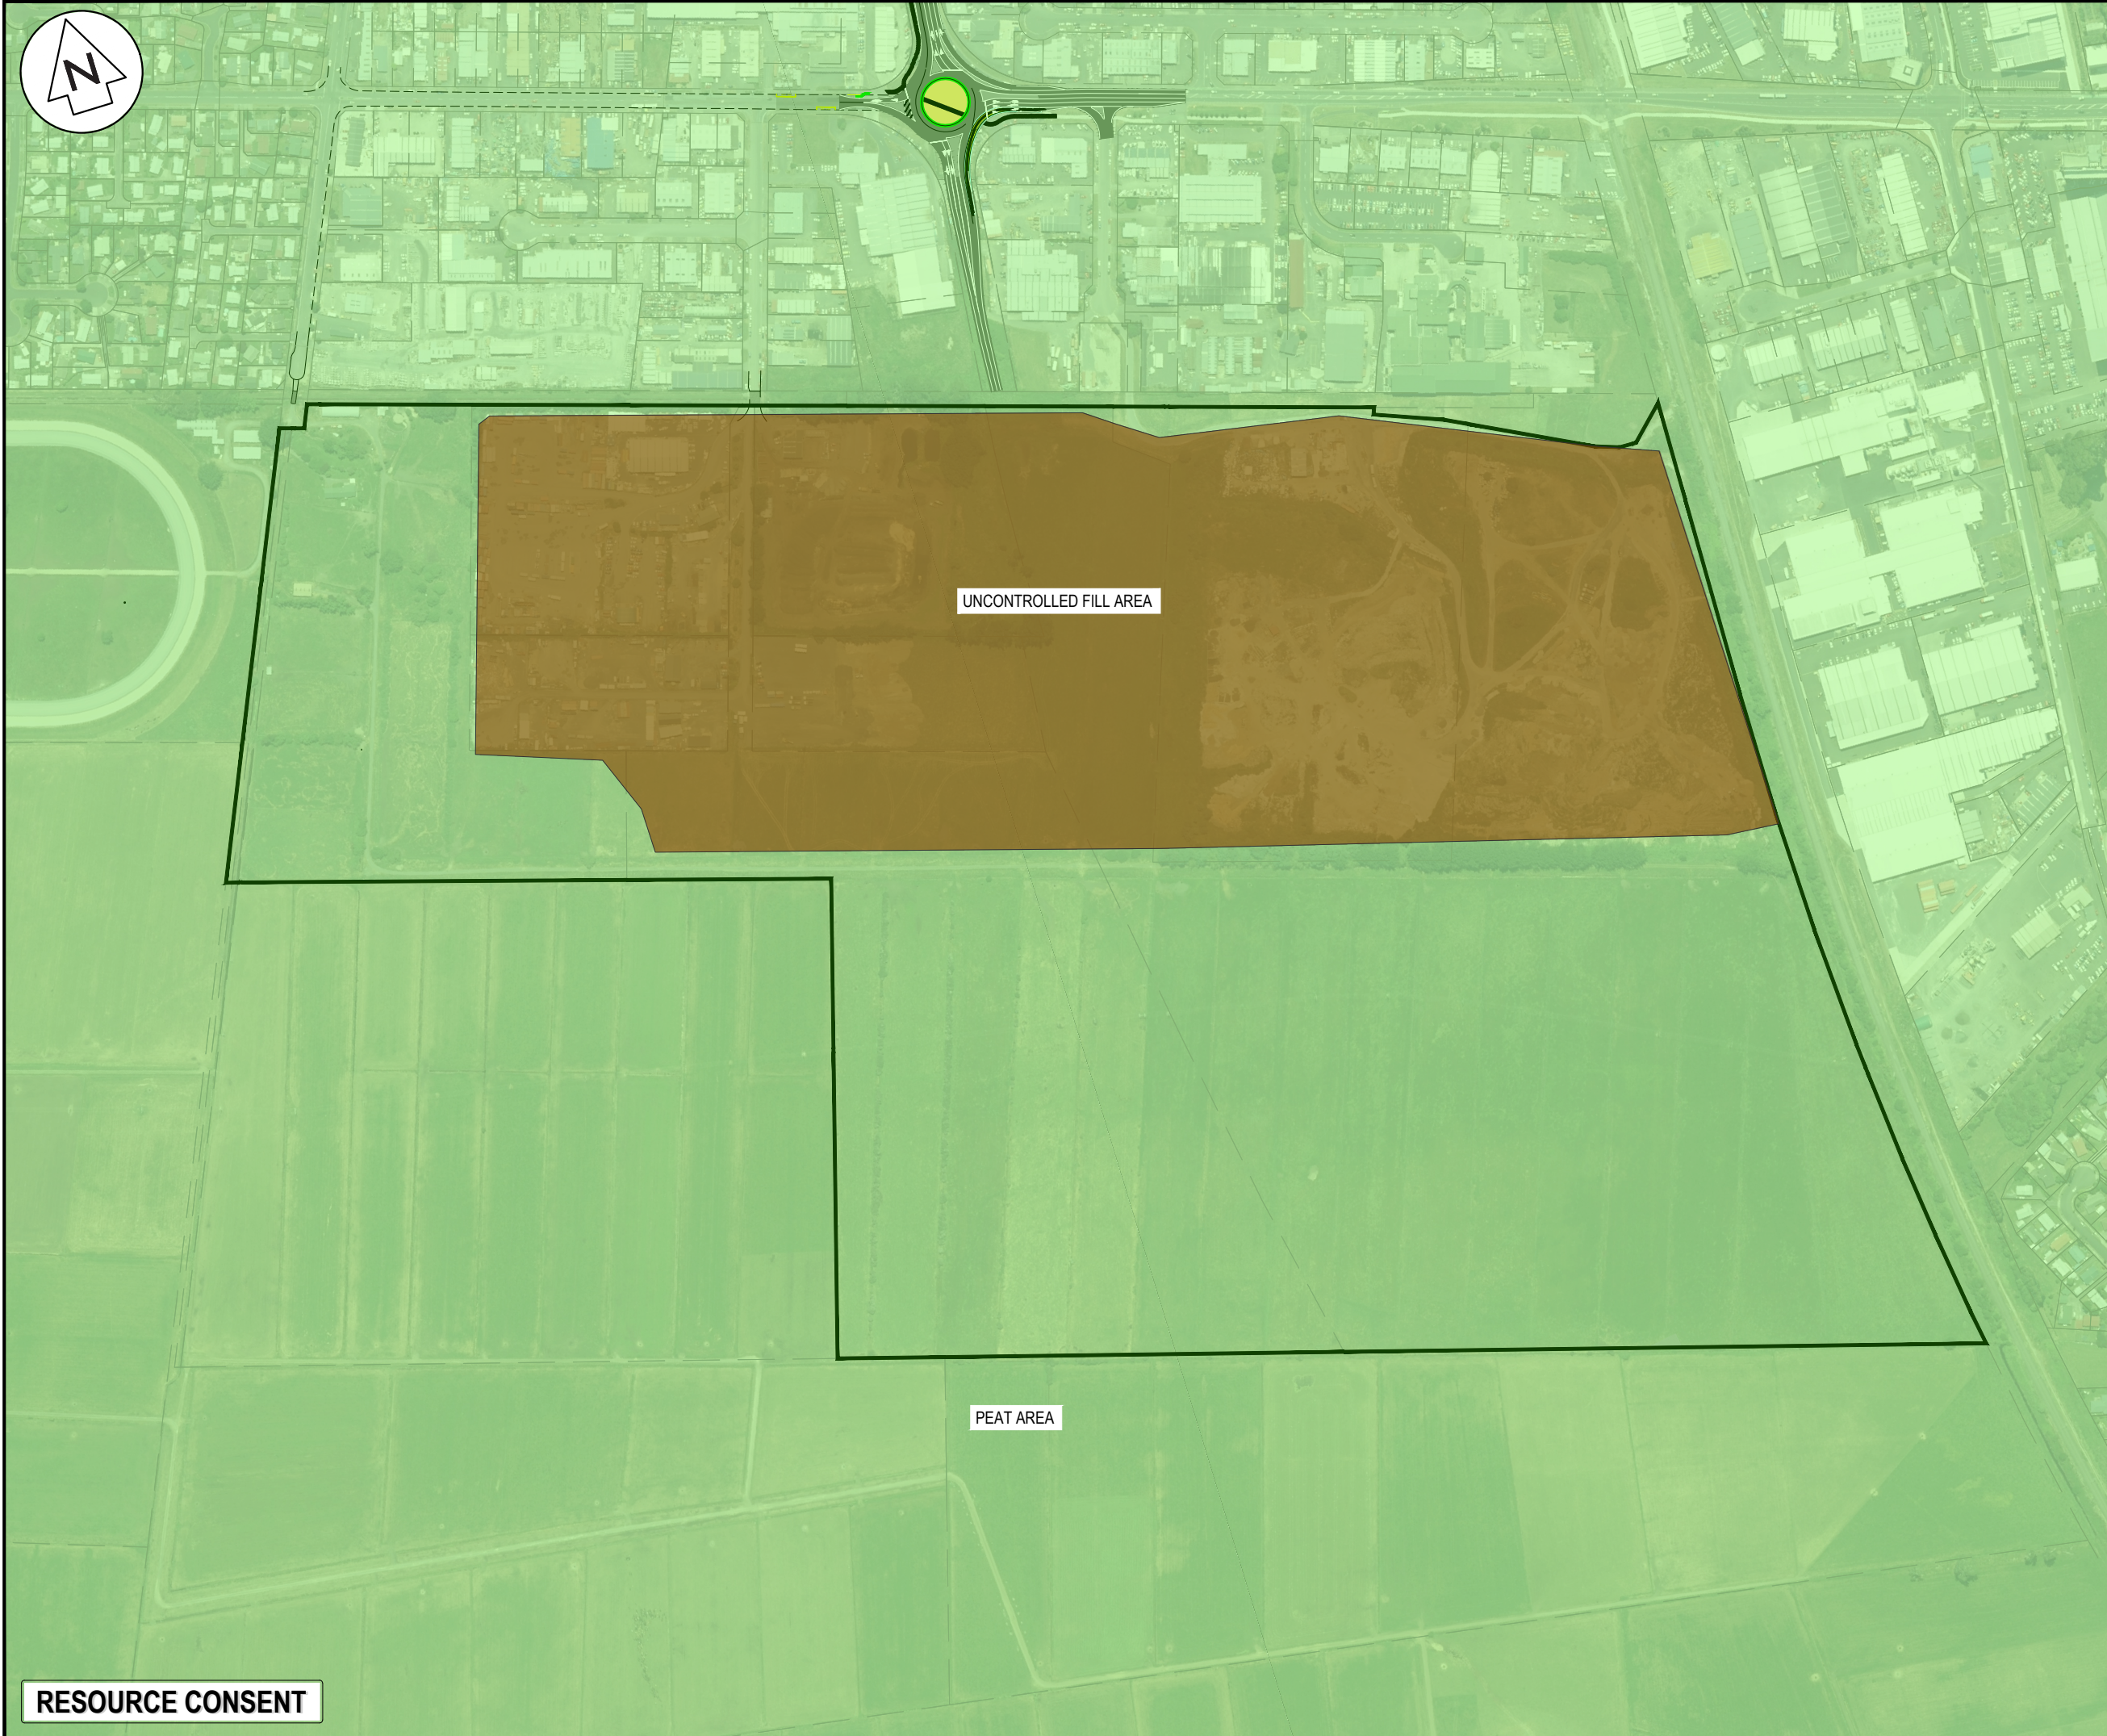

- NOTES
1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL INFRASTRUCTURE TECHNICAL SPECIFICATIONS.
 2. CO-ORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000.
 3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
 4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY HIS OPERATIONS.

LEGEND

	EX BDY
	PROP BDY
	EX. UNCONTROLLED FILL AREA
	EX. PEAT AREA

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
		By	Date
Survey	MAVEN		05/2025
Design	MKS		06/2026
Drawn	MKS		06/2026
Checked	SM		09/2026



Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
Level 1 286 Victoria Street, Hamilton
New Zealand

Project


**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title

**EXISTING
PEAT
OVERVIEW PLAN**

Project no.	298002		
Scale	1:5000 @ A3		
Cad file	298002-11-C215 PEAT PRELOAD.DWG		
Drawing no.	C214	Rev	A

RESOURCE CONSENT

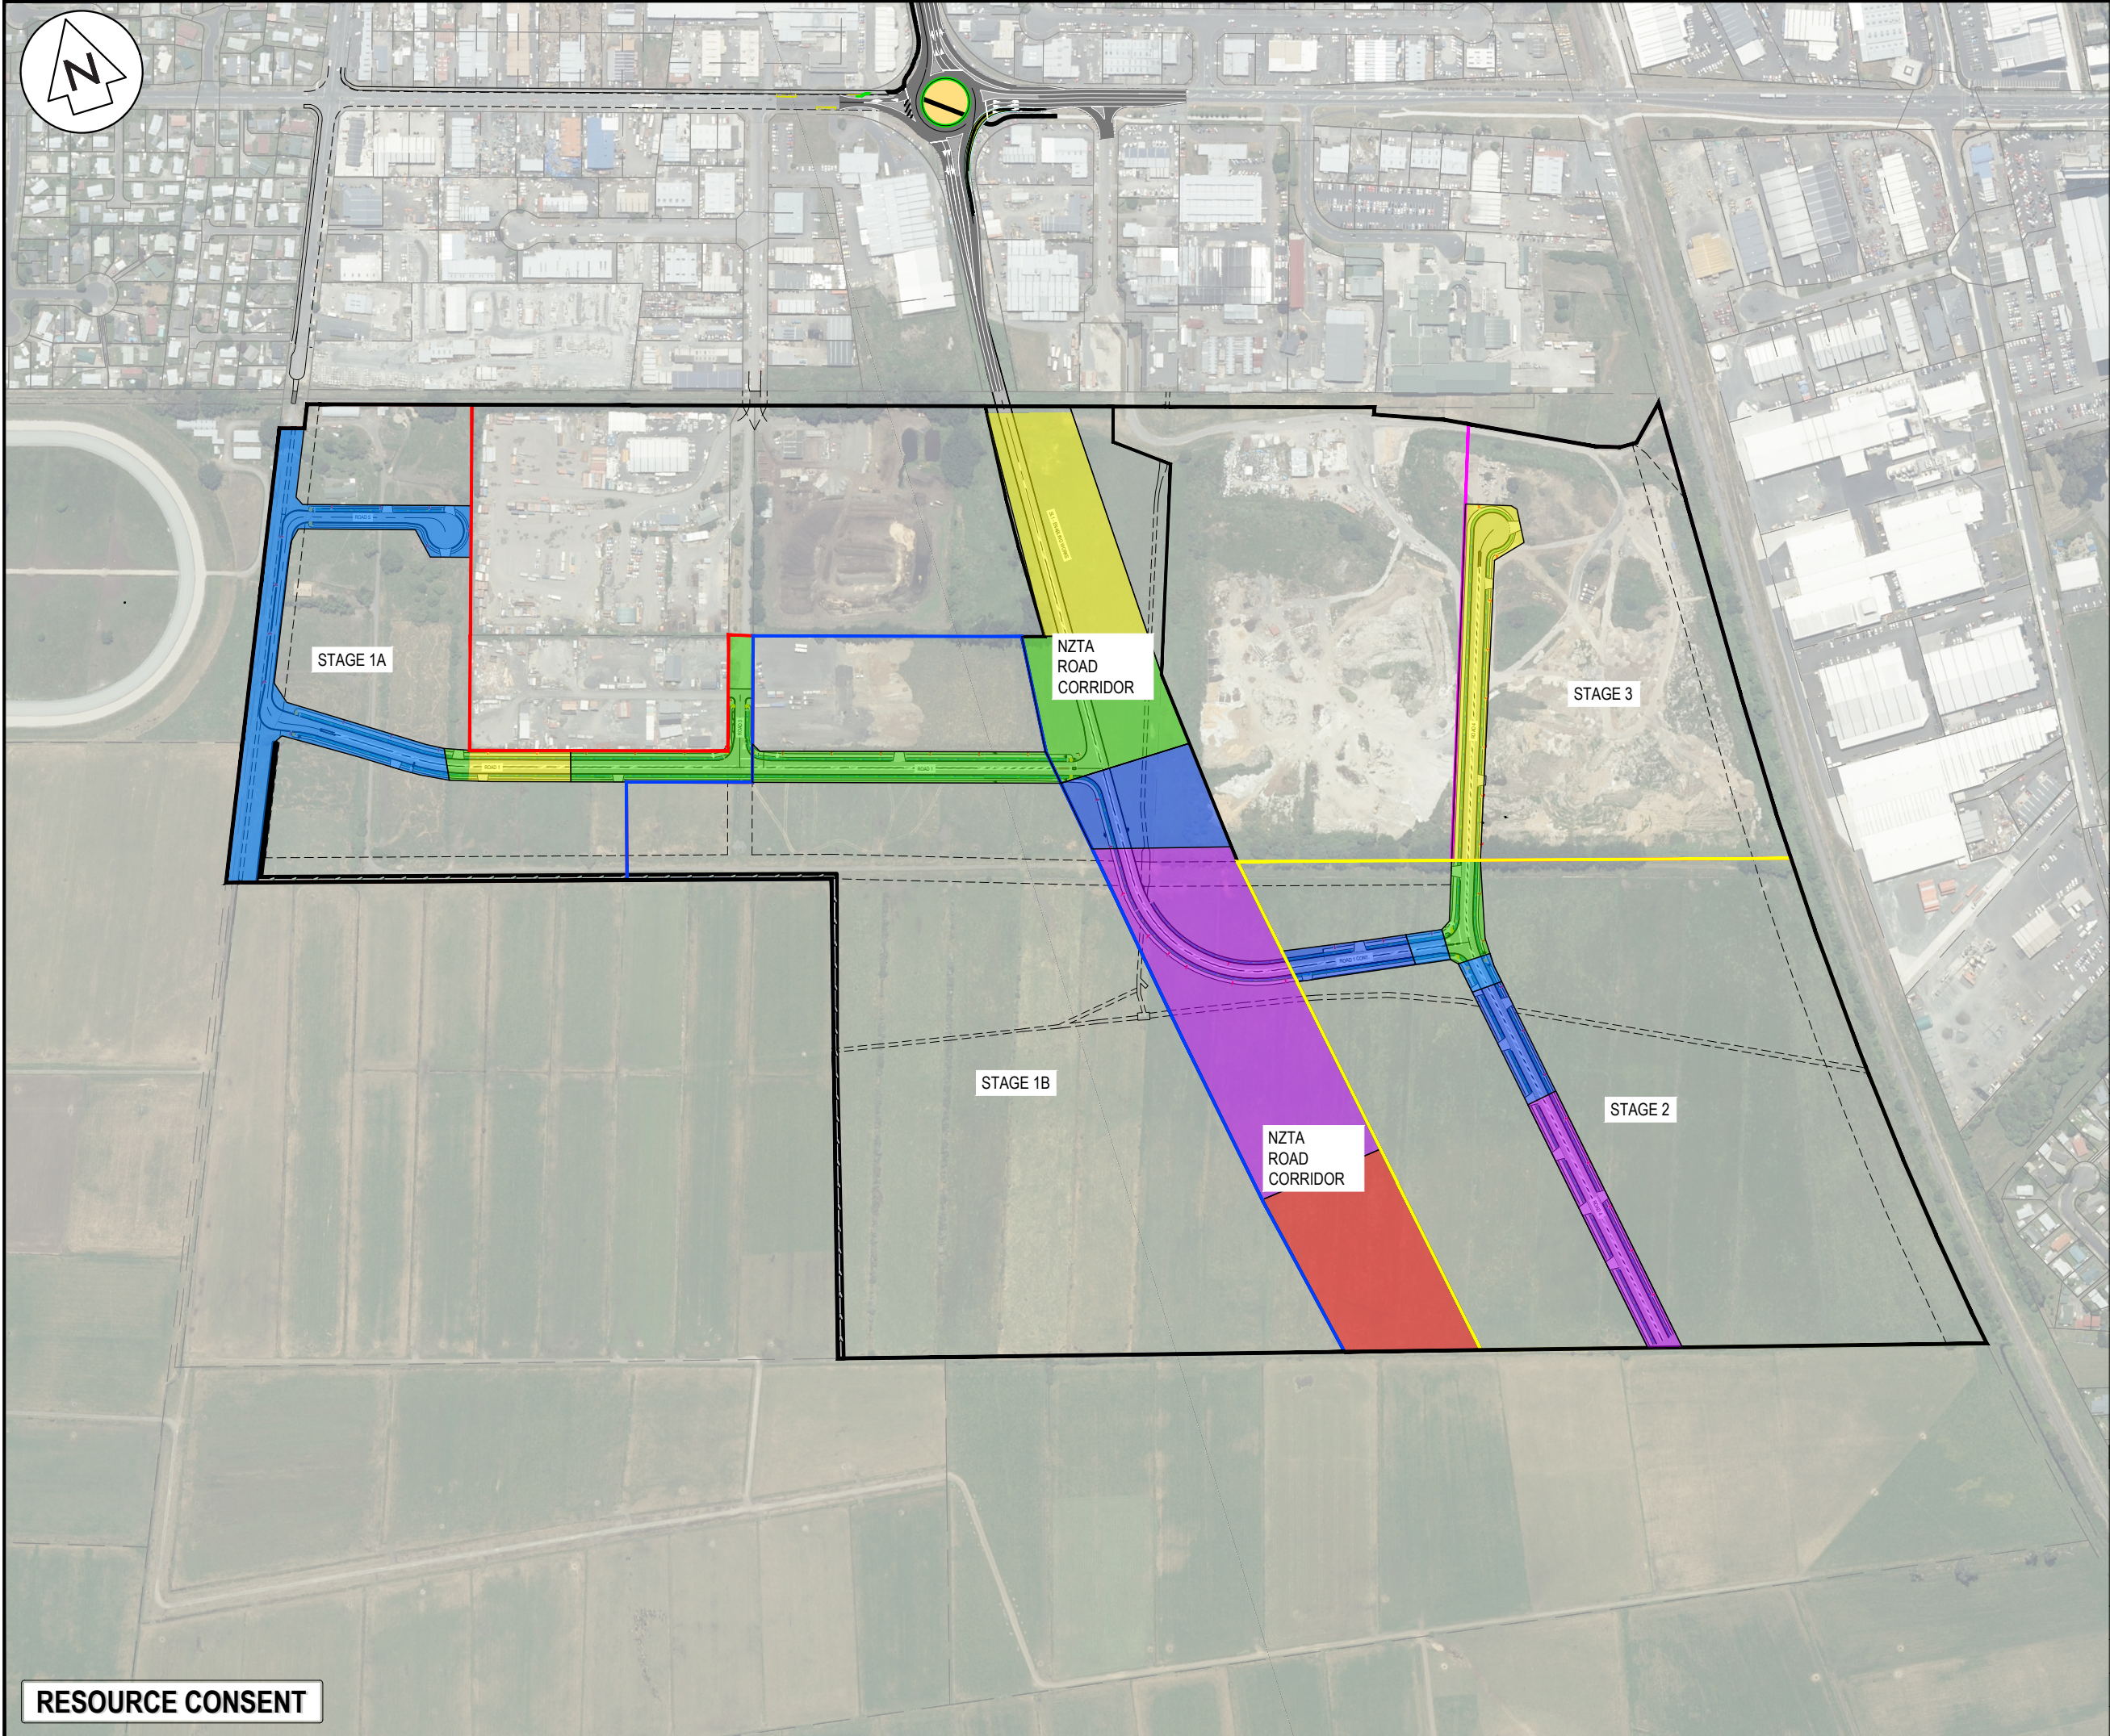

- NOTES
1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL INFRASTRUCTURE TECHNICAL SPECIFICATIONS.
 2. CO-ORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000.
 3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
 4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY HIS OPERATIONS.

LEGEND

	EX BDY
	PROP BDY
	1M PRELOAD
	1.5M PRELOAD
	2M PRELOAD
	3M PRELOAD
	4M PRELOAD
	4.5M PRELOAD

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
Survey	MAVEN		05/2025
Design	MKS		06/2026
Drawn	MKS		06/2026
Checked	SM		09/2026




Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
Level 1 286 Victoria Street, Hamilton
New Zealand

Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED
PEAT PRELOAD
OVERVIEW PLAN**

Project no.	298002		
Scale	1:5000 @ A3		
Cad file	298002-11-C215 PEAT PRELOAD.DWG		
Drawing no.	C215	Rev	A

RESOURCE CONSENT

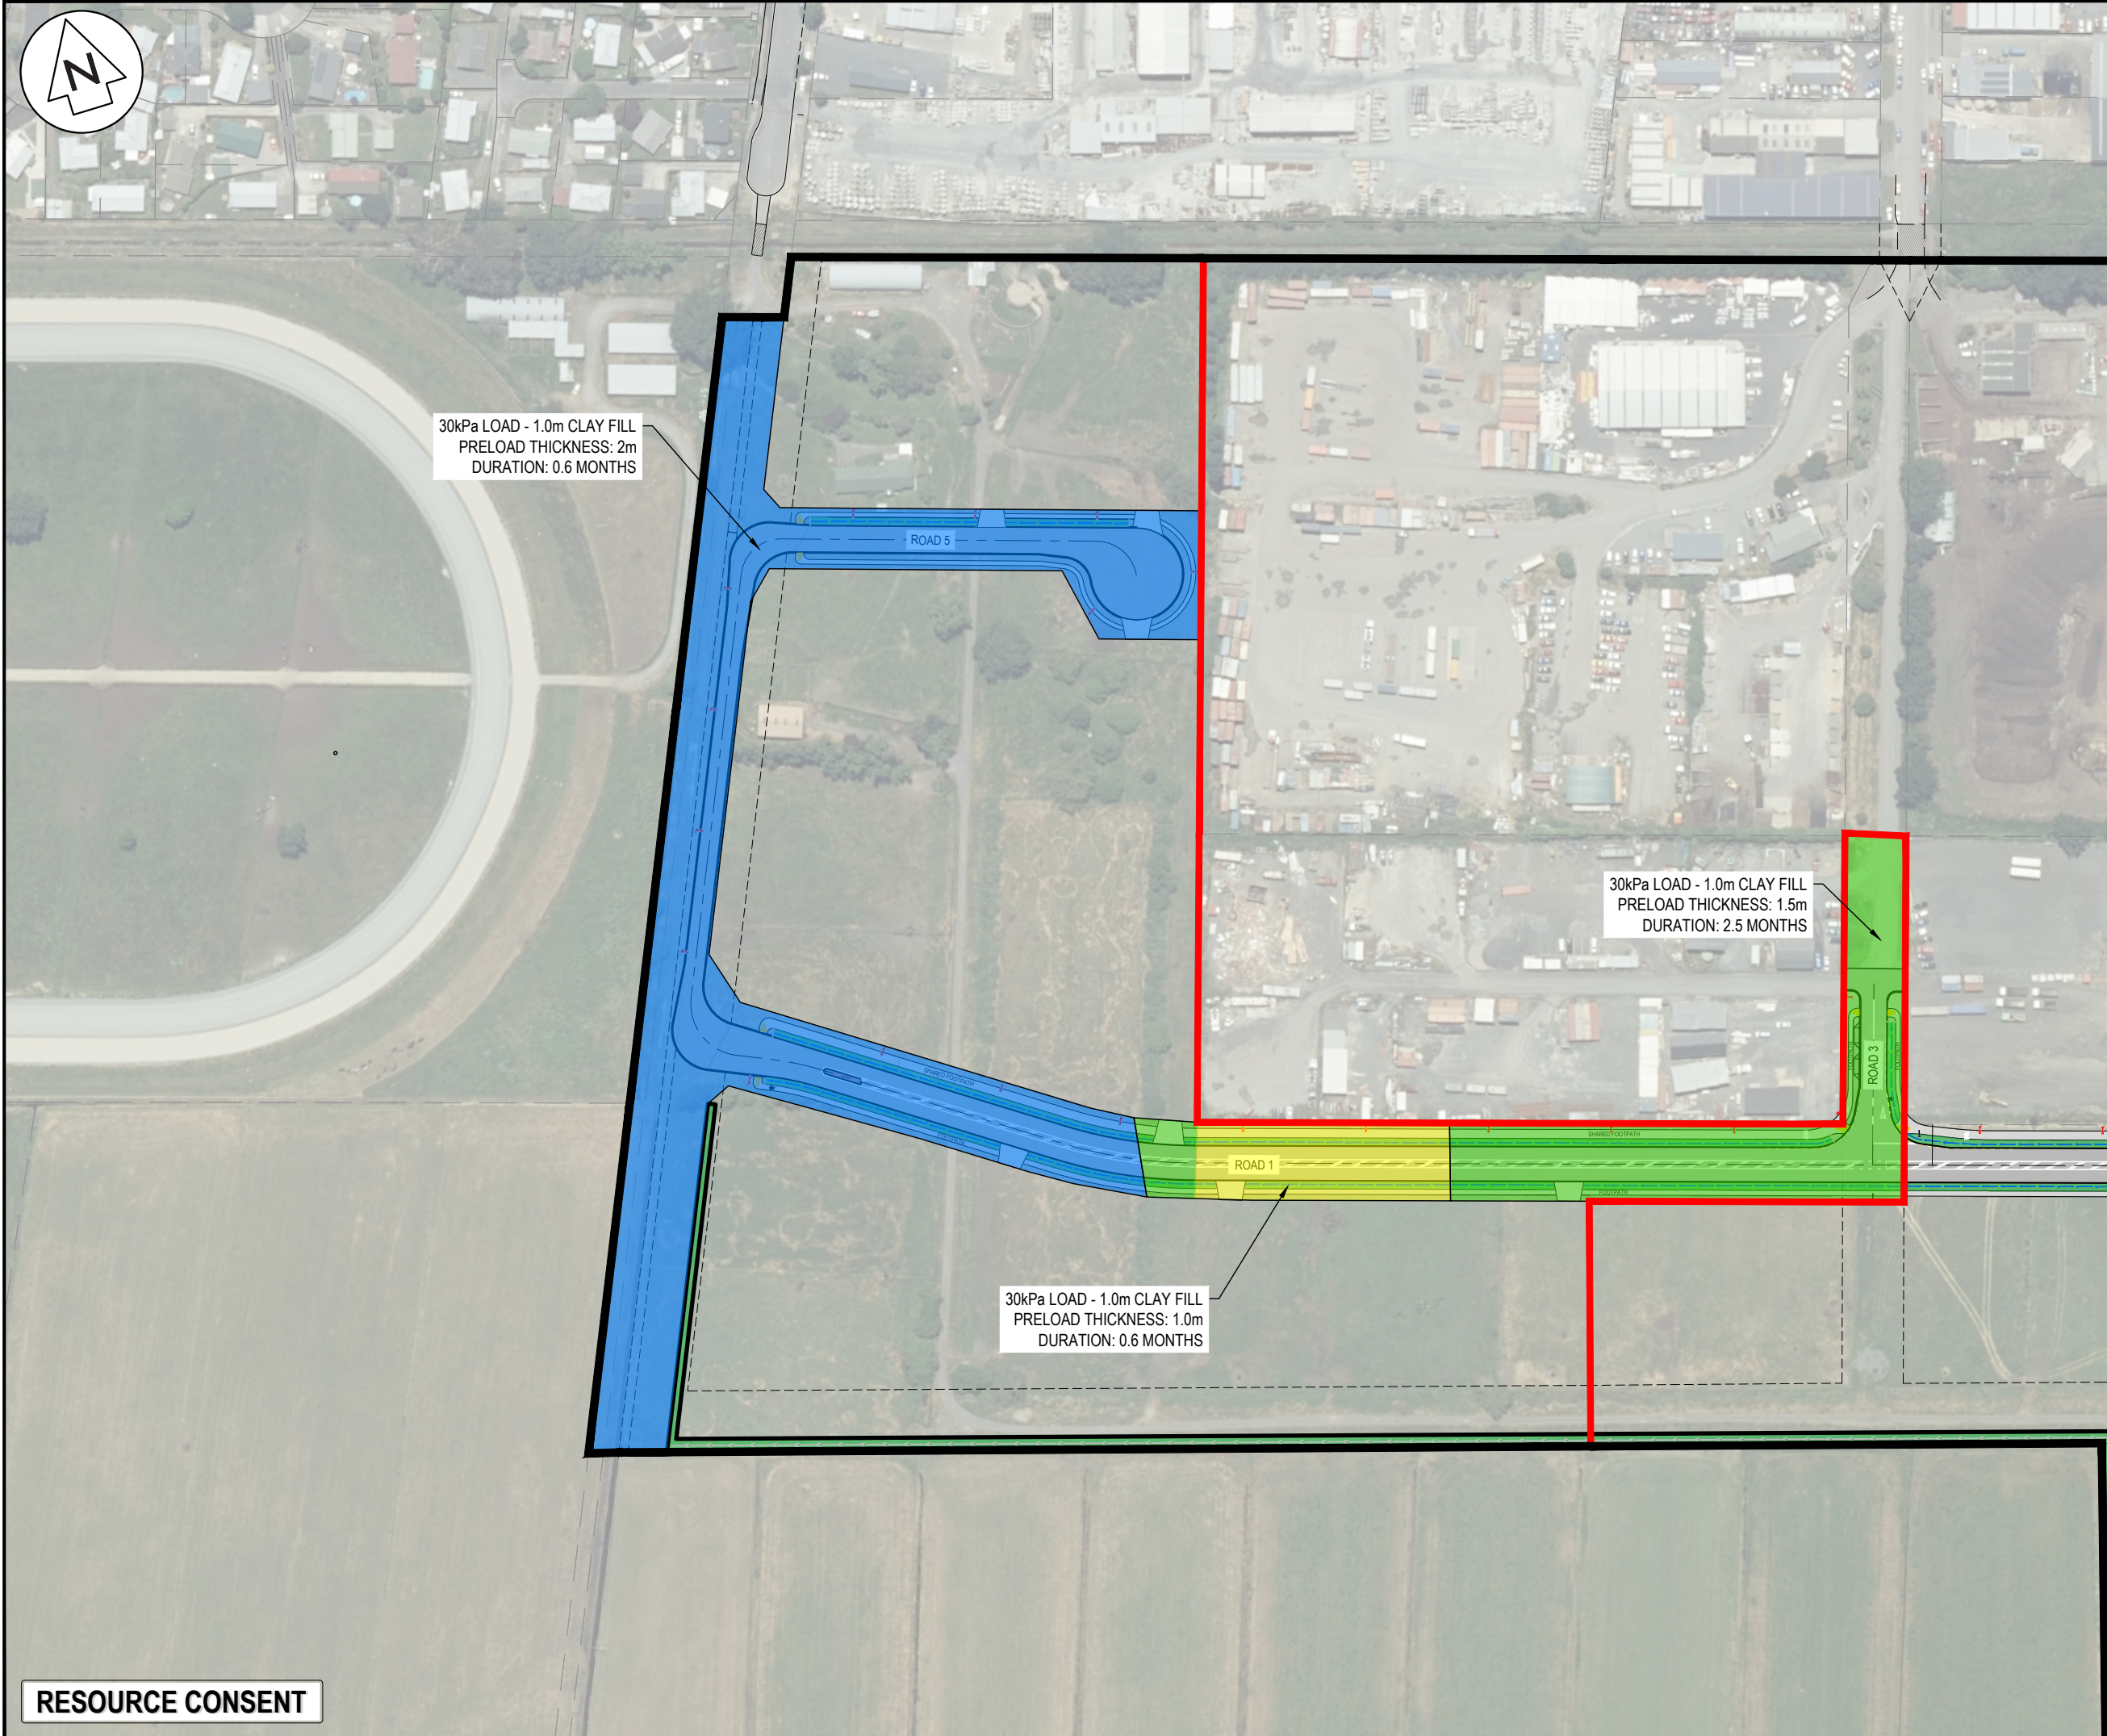

- NOTES
1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL INFRASTRUCTURE TECHNICAL SPECIFICATIONS.
 2. CO-ORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000.
 3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
 4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY HIS OPERATIONS.

LEGEND

—	EX BDY
—	PROP BDY
—	1M PRELOAD
—	1.5M PRELOAD
—	2M PRELOAD
—	3M PRELOAD
—	4M PRELOAD
—	4.5M PRELOAD

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
		By	Date
Survey	MAVEN		05/2025
Design	MKS		06/2026
Drawn	MKS		06/2026
Checked	SM		09/2026

M Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
Level 1 286 Victoria Street, Hamilton
New Zealand

Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED
PEAT PRELOAD
PLAN STAGE 1A**

Project no.	298002		
Scale	1:2000 @ A3		
Cad file	298002-11-C215 PEAT PRELOAD.DWG		
Drawing no.	C215-1	Rev	A

RESOURCE CONSENT



- NOTES
1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL INFRASTRUCTURE TECHNICAL SPECIFICATIONS.
 2. CO-ORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000.
 3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
 4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY HIS OPERATIONS.

LEGEND

EX BDY
PROP BDY
1M PRELOAD
1.5M PRELOAD
2M PRELOAD
3M PRELOAD
4M PRELOAD
4.5M PRELOAD

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
	Survey	MAVEN	05/2025
	Design	MKS	06/2026
	Drawn	MKS	06/2026
	Checked	SM	09/2026



Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
Level 1 286 Victoria Street, Hamilton
New Zealand

Project


**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title

**PROPOSED
PEAT PRELOAD
PLAN STAGE 1B**

Project no.	298002		
Scale	1:2500 @ A3		
Cad file	298002-11-C215 PEAT PRELOAD.DWG		
Drawing no.	C215-2	Rev	A

RESOURCE CONSENT

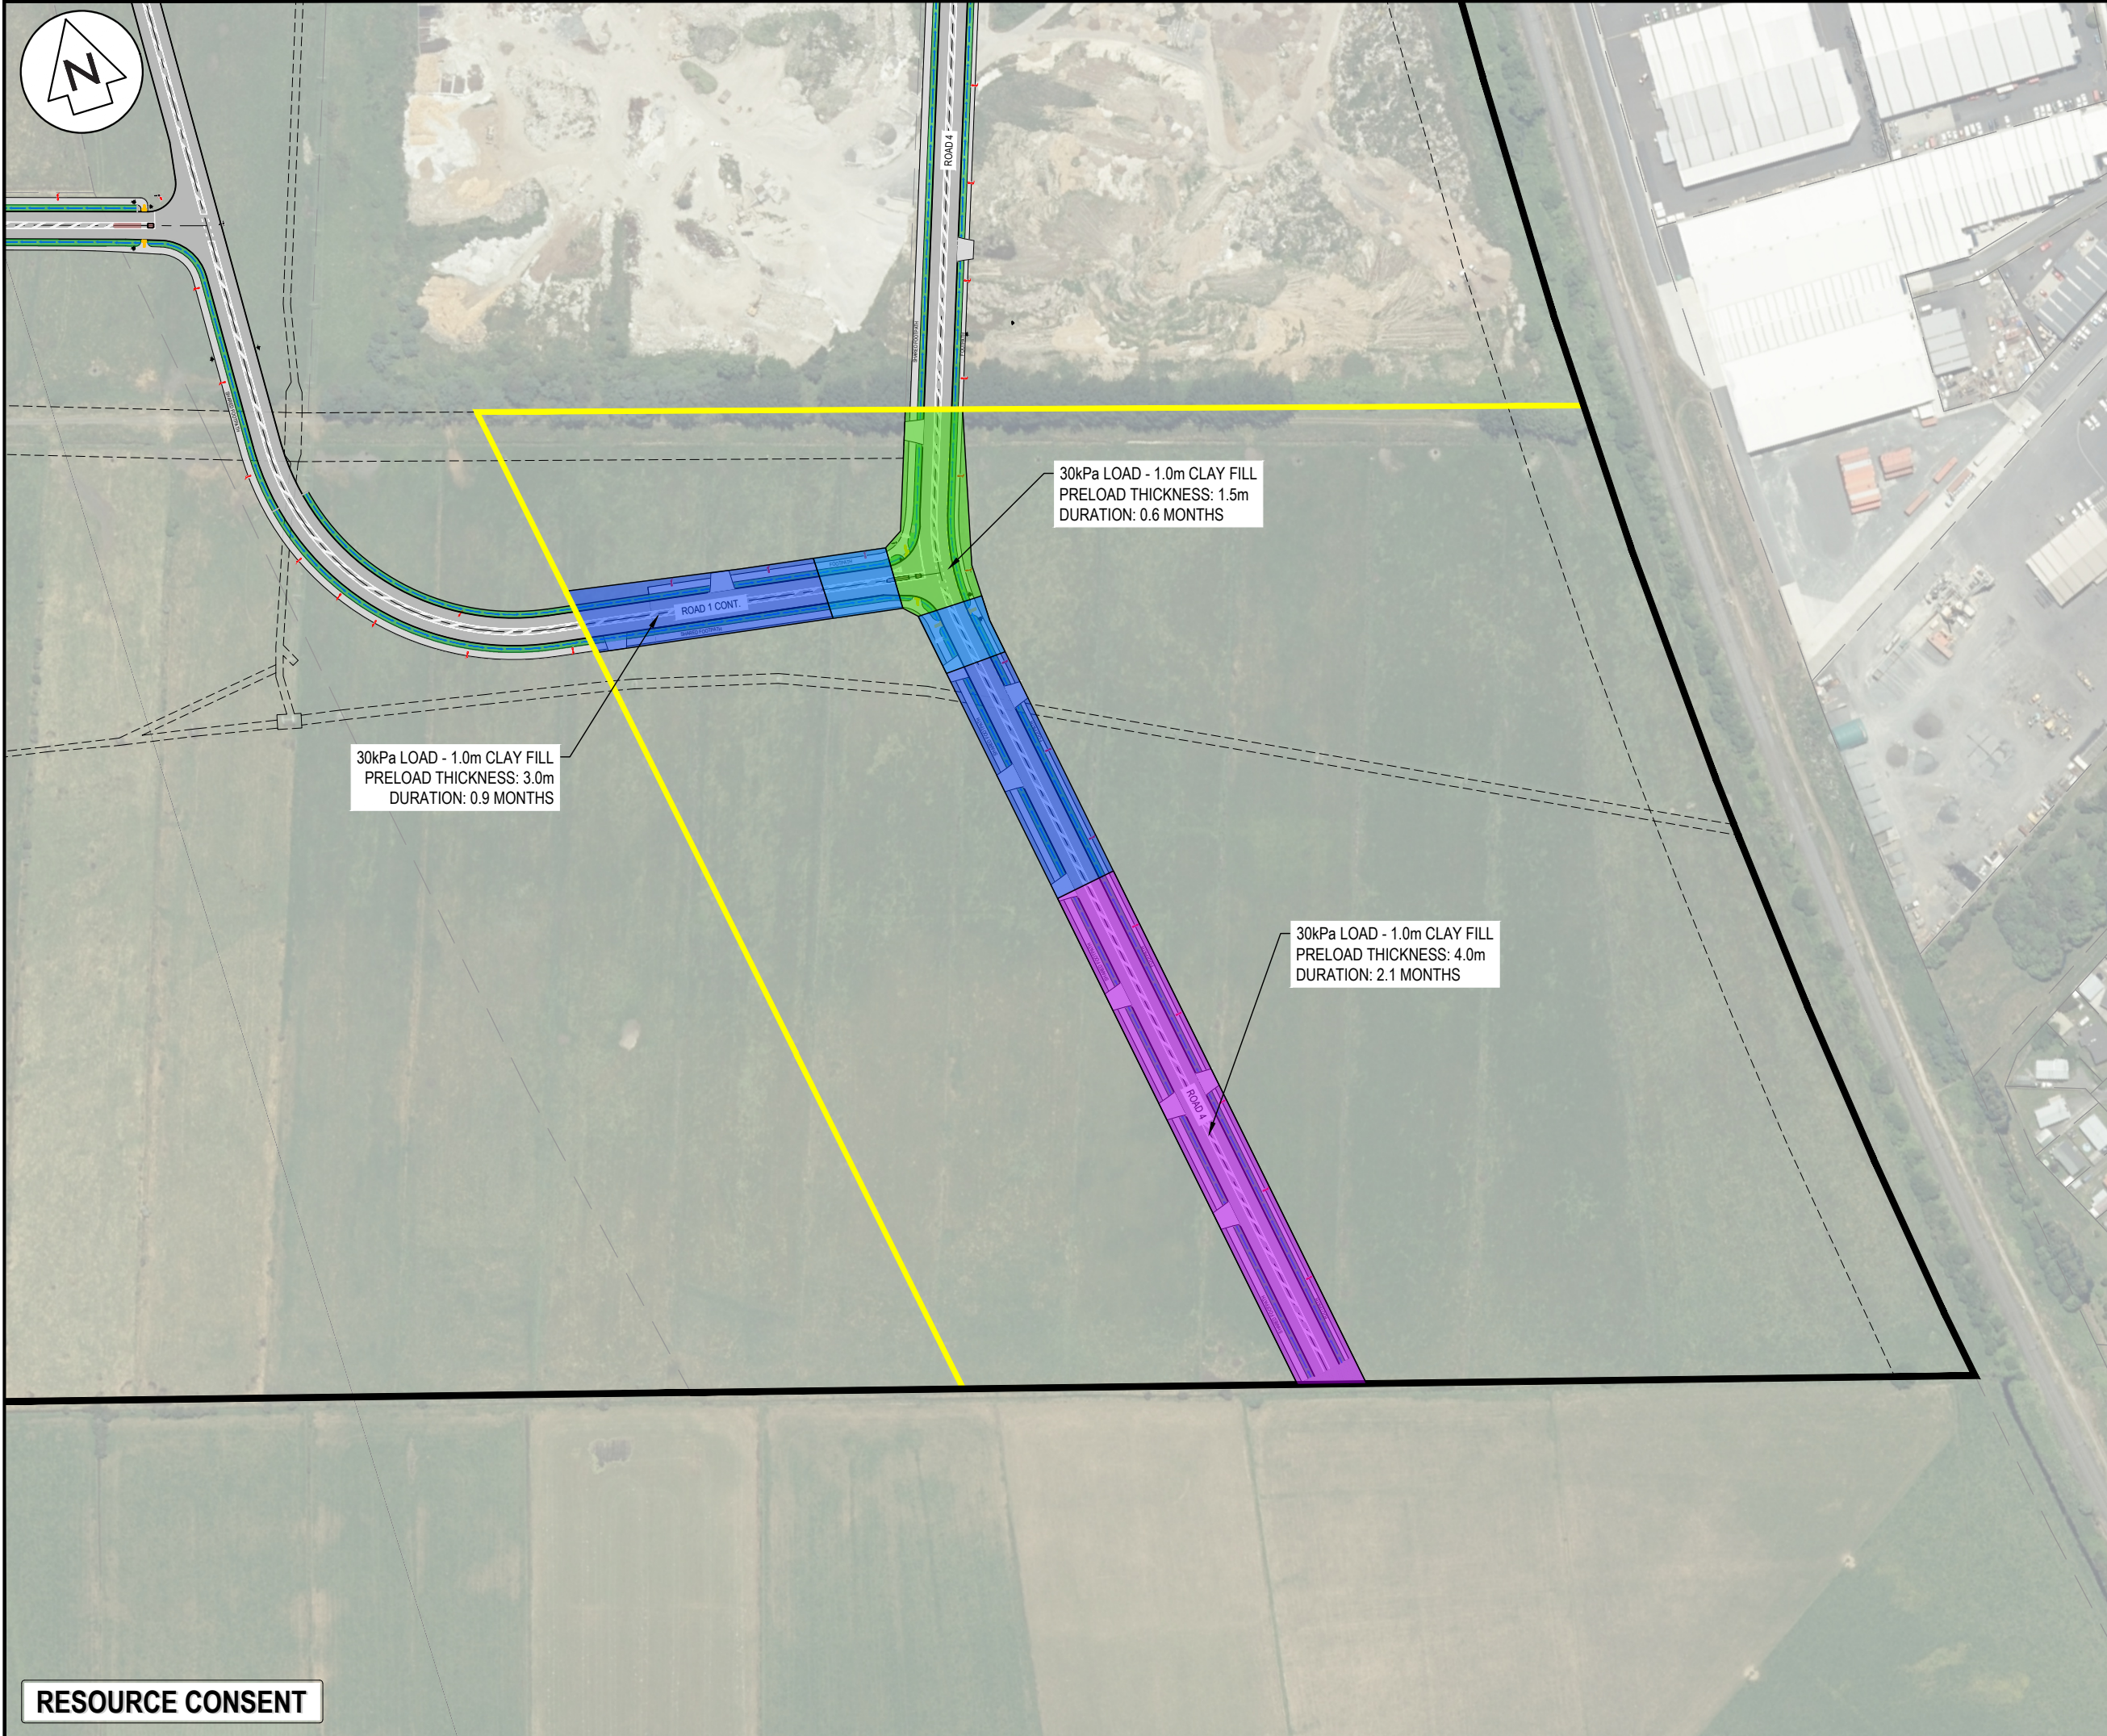

- NOTES
1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL INFRASTRUCTURE TECHNICAL SPECIFICATIONS.
 2. CO-ORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000.
 3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
 4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY HIS OPERATIONS.

LEGEND

EX BDY	EX BDY
PROP BDY	PROP BDY
1M PRELOAD	1M PRELOAD
1.5M PRELOAD	1.5M PRELOAD
2M PRELOAD	2M PRELOAD
3M PRELOAD	3M PRELOAD
4M PRELOAD	4M PRELOAD
4.5M PRELOAD	4.5M PRELOAD

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
		By	Date
Survey	MAVEN		05/2025
Design	MKS		06/2026
Drawn	MKS		06/2026
Checked	SM		09/2026



Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
Level 1 286 Victoria Street, Hamilton
New Zealand

Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED
PEAT PRELOAD
PLAN STAGE 2**

Project no.	298002		
Scale	1:2500 @ A3		
Cad file	298002-11-C215 PEAT PRELOAD.DWG		
Drawing no.	C215-3	Rev	A

RESOURCE CONSENT



- NOTES
1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL INFRASTRUCTURE TECHNICAL SPECIFICATIONS.
 2. CO-ORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000.
 3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
 4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY HIS OPERATIONS.

LEGEND	
	EX BDY
	PROP BDY
	1M PRELOAD
	1.5M PRELOAD
	2M PRELOAD
	3M PRELOAD
	4M PRELOAD
	4.5M PRELOAD

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
		By	Date
Survey	MAVEN		05/2025
Design	MKS		06/2026
Drawn	MKS		06/2026
Checked	SM		09/2026

Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
Level 1 286 Victoria Street, Hamilton
New Zealand

Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED
PEAT PRELOAD
PLAN STAGE 3**

Project no.	298002		
Scale	1:2000 @ A3		
Cad file	298002-11-C215 PEAT PRELOAD.DWG		
Drawing no.	C215-4	Rev	A





- NOTES
1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL INFRASTRUCTURE TECHNICAL SPECIFICATIONS.
 2. CO-ORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000.
 3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
 4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY HIS OPERATIONS.

LEGEND

	EX BDY
	PROP BDY
	1M PRELOAD
	1.5M PRELOAD
	2M PRELOAD
	3M PRELOAD
	4M PRELOAD
	4.5M PRELOAD


A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
		By	Date
Survey	MAVEN		05/2025
Design	MKS		06/2026
Drawn	MKS		06/2026
Checked	SM		09/2026

Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
Level 1 286 Victoria Street, Hamilton
New Zealand

Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**


Title
**PROPOSED
PEAT PRELOAD
PLAN NZTA CORRIDOR**

Project no.	298002		
Scale	1:5000 @ A3		
Cad file	298002-11-C215 PEAT PRELOAD.DWG		
Drawing no.	C215-5	Rev	A

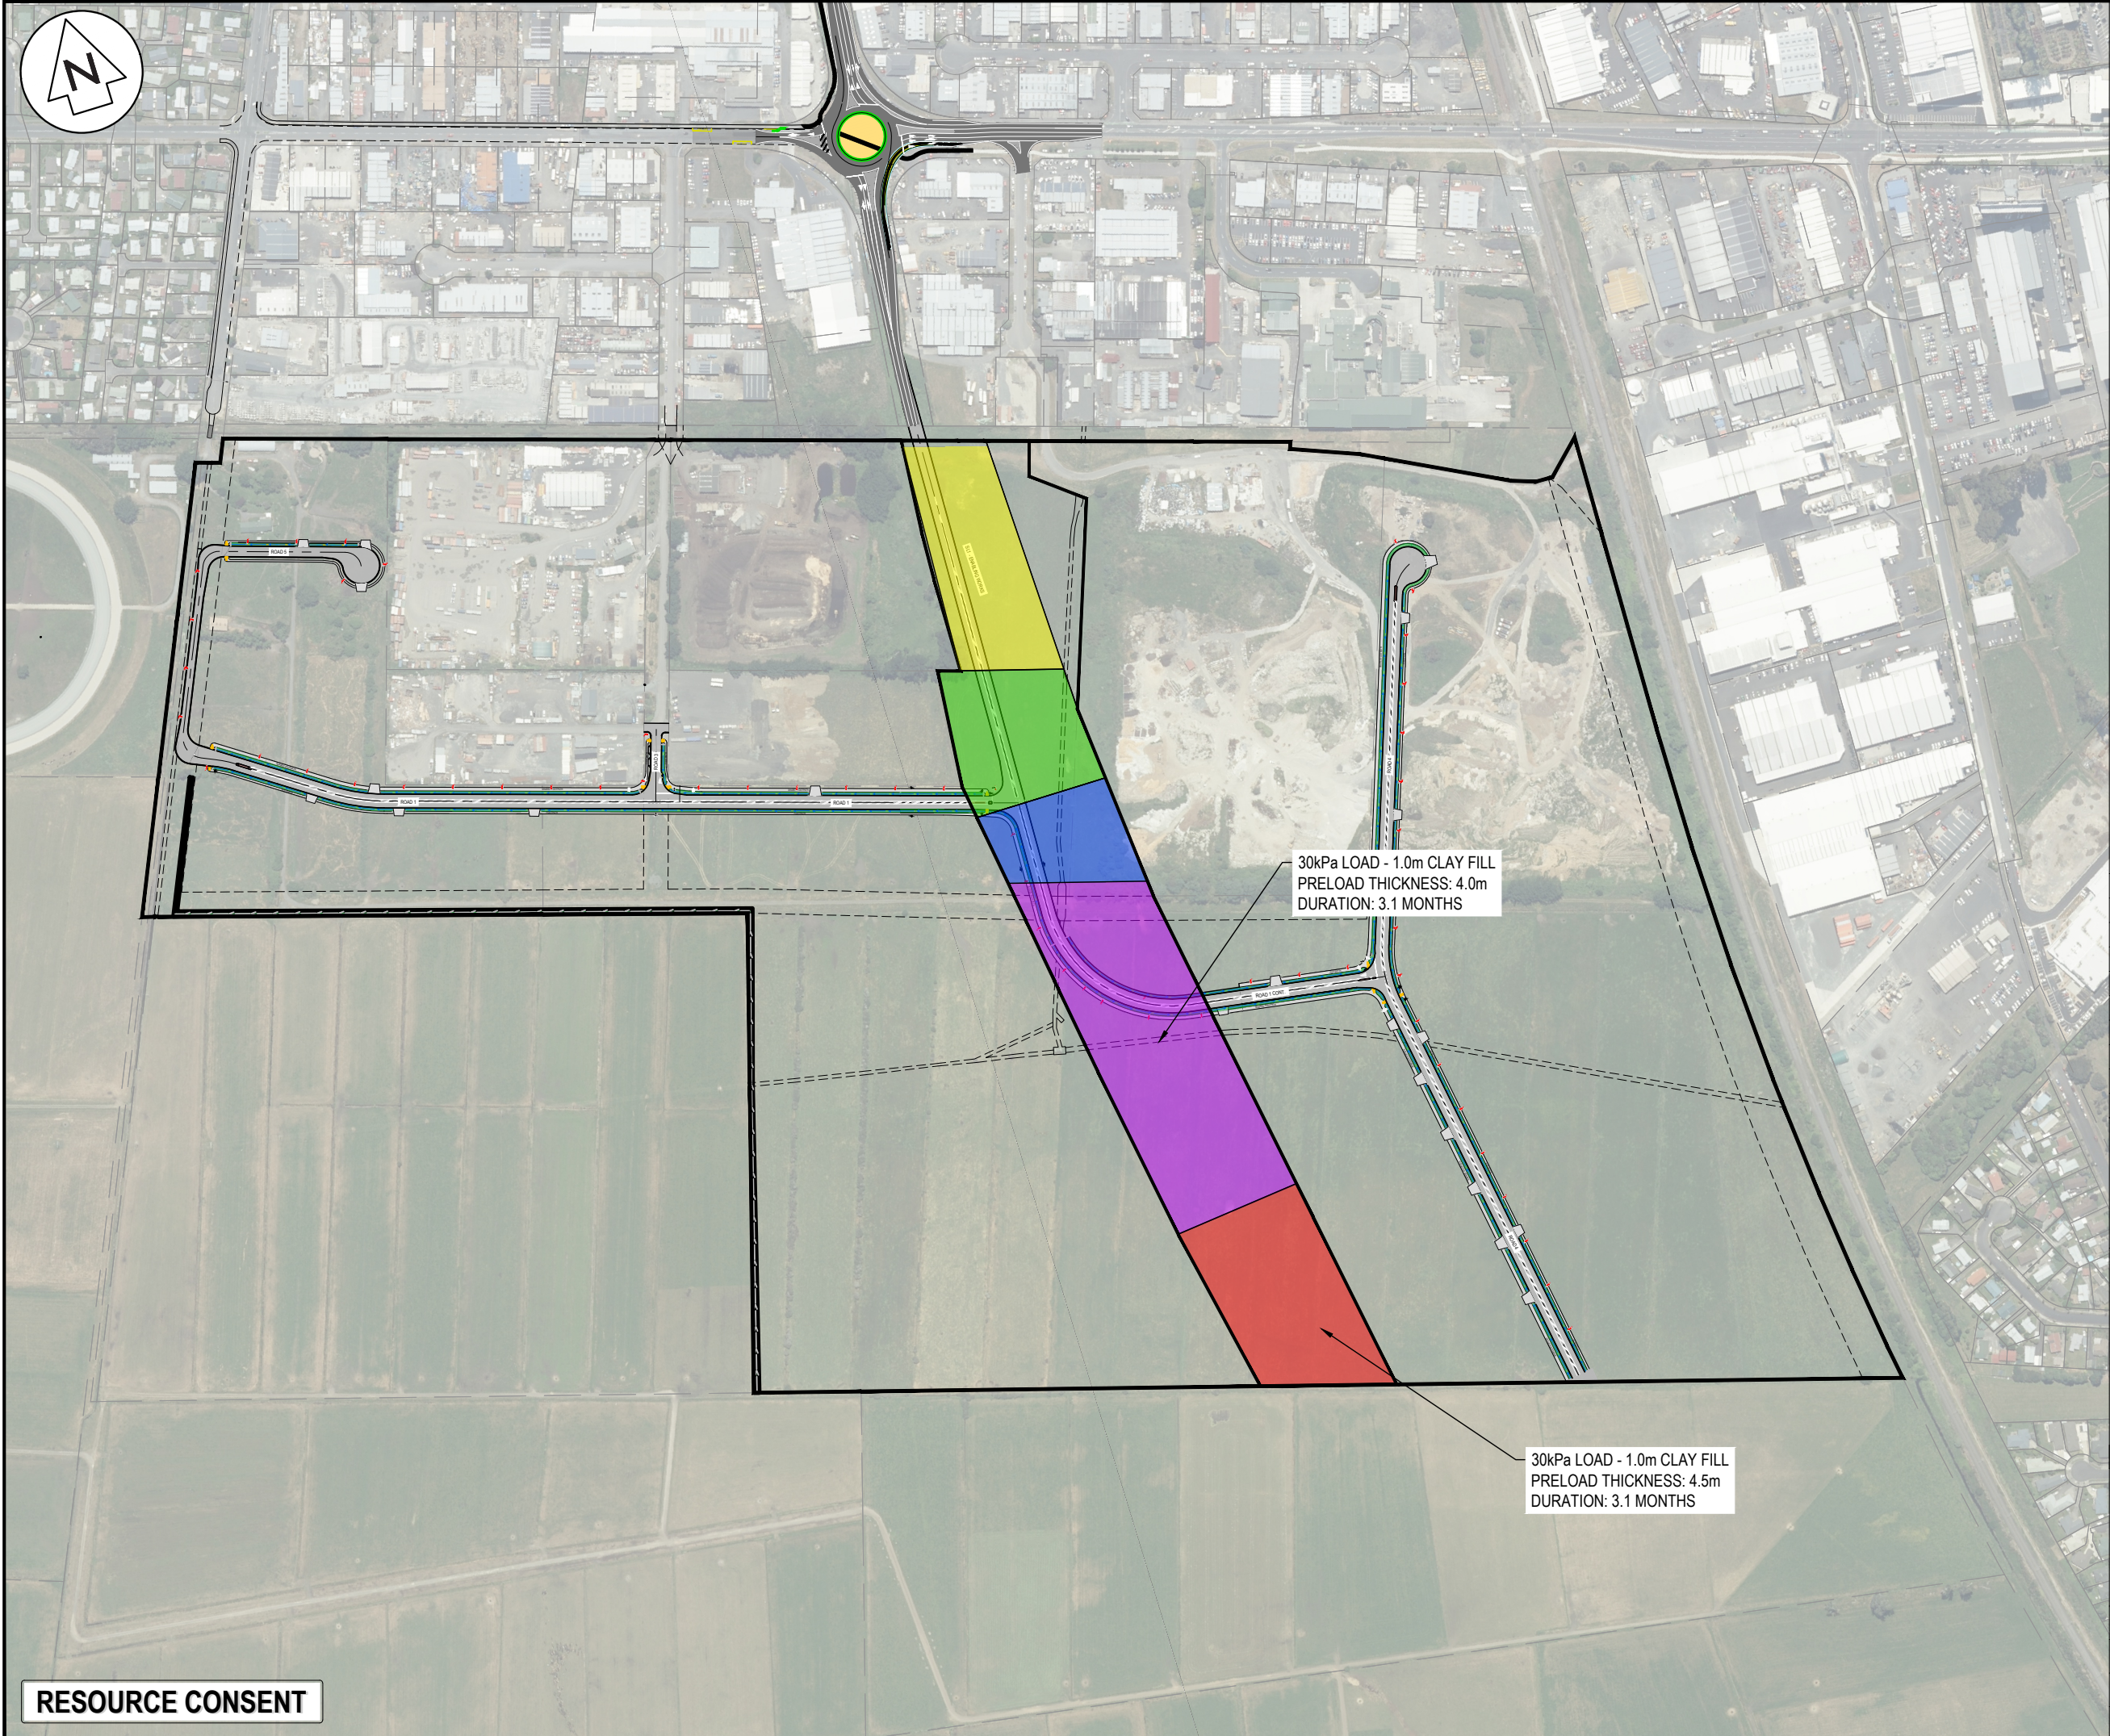

RESOURCE CONSENT

DATE: 9/26 FILE PATH: \\MAVEN\MAVEN\CONSULTING\CO_NZ\HARDCURRENT\MAVEN_HAMILTON\PROJECTS\298002 - SL1\110\298002-H-C215 PEAT PRELOAD.DWG

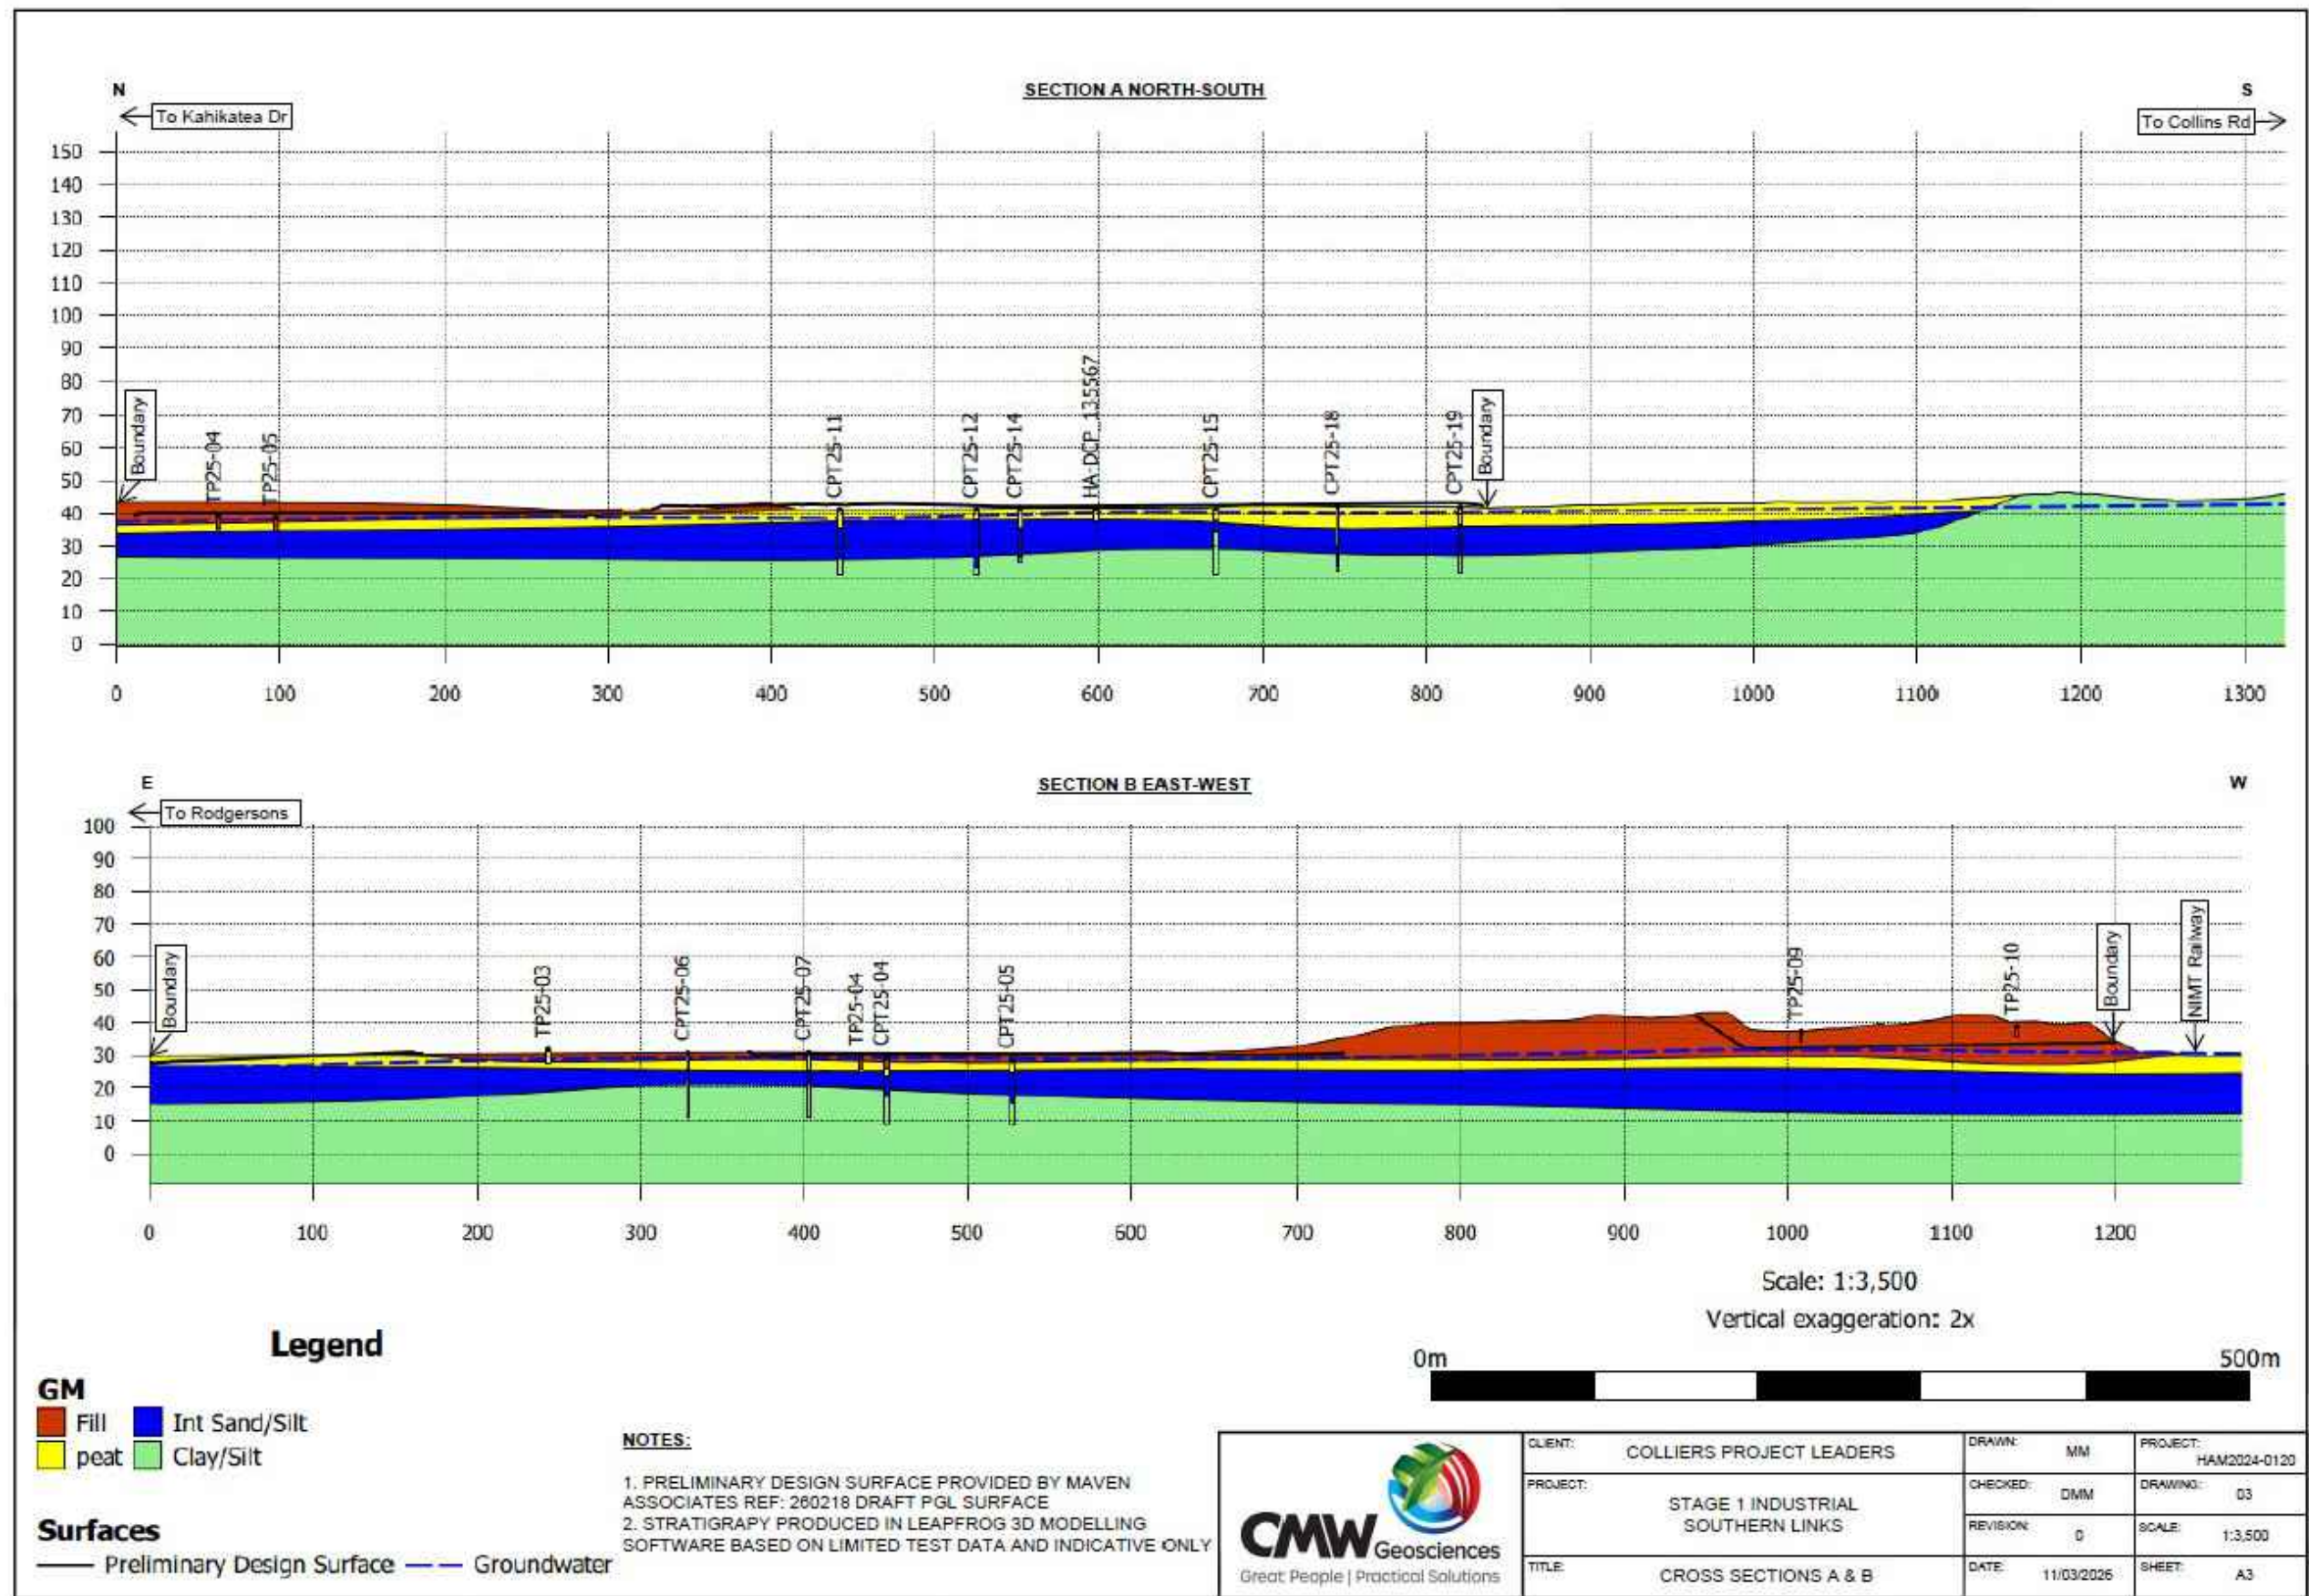

RESOURCE CONSENT


A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
	By	Date	
Survey	MAVEN	05/2025	
Design	MKS	06/2026	
Drawn	MKS	06/2026	
Checked	SM	09/2026	



Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED
PEAT PRELOAD
CROSS SECTIONS**

Project no.	298002
Scale	N.T.S.
Cad file	298002-11-C215 PEAT PRELOAD.DWG
Drawing no.	C215-6
Rev	A




KAHIKATEA DRIVE

HIGGINS ROAD

WICKHAM STREET

LATHAM COURT

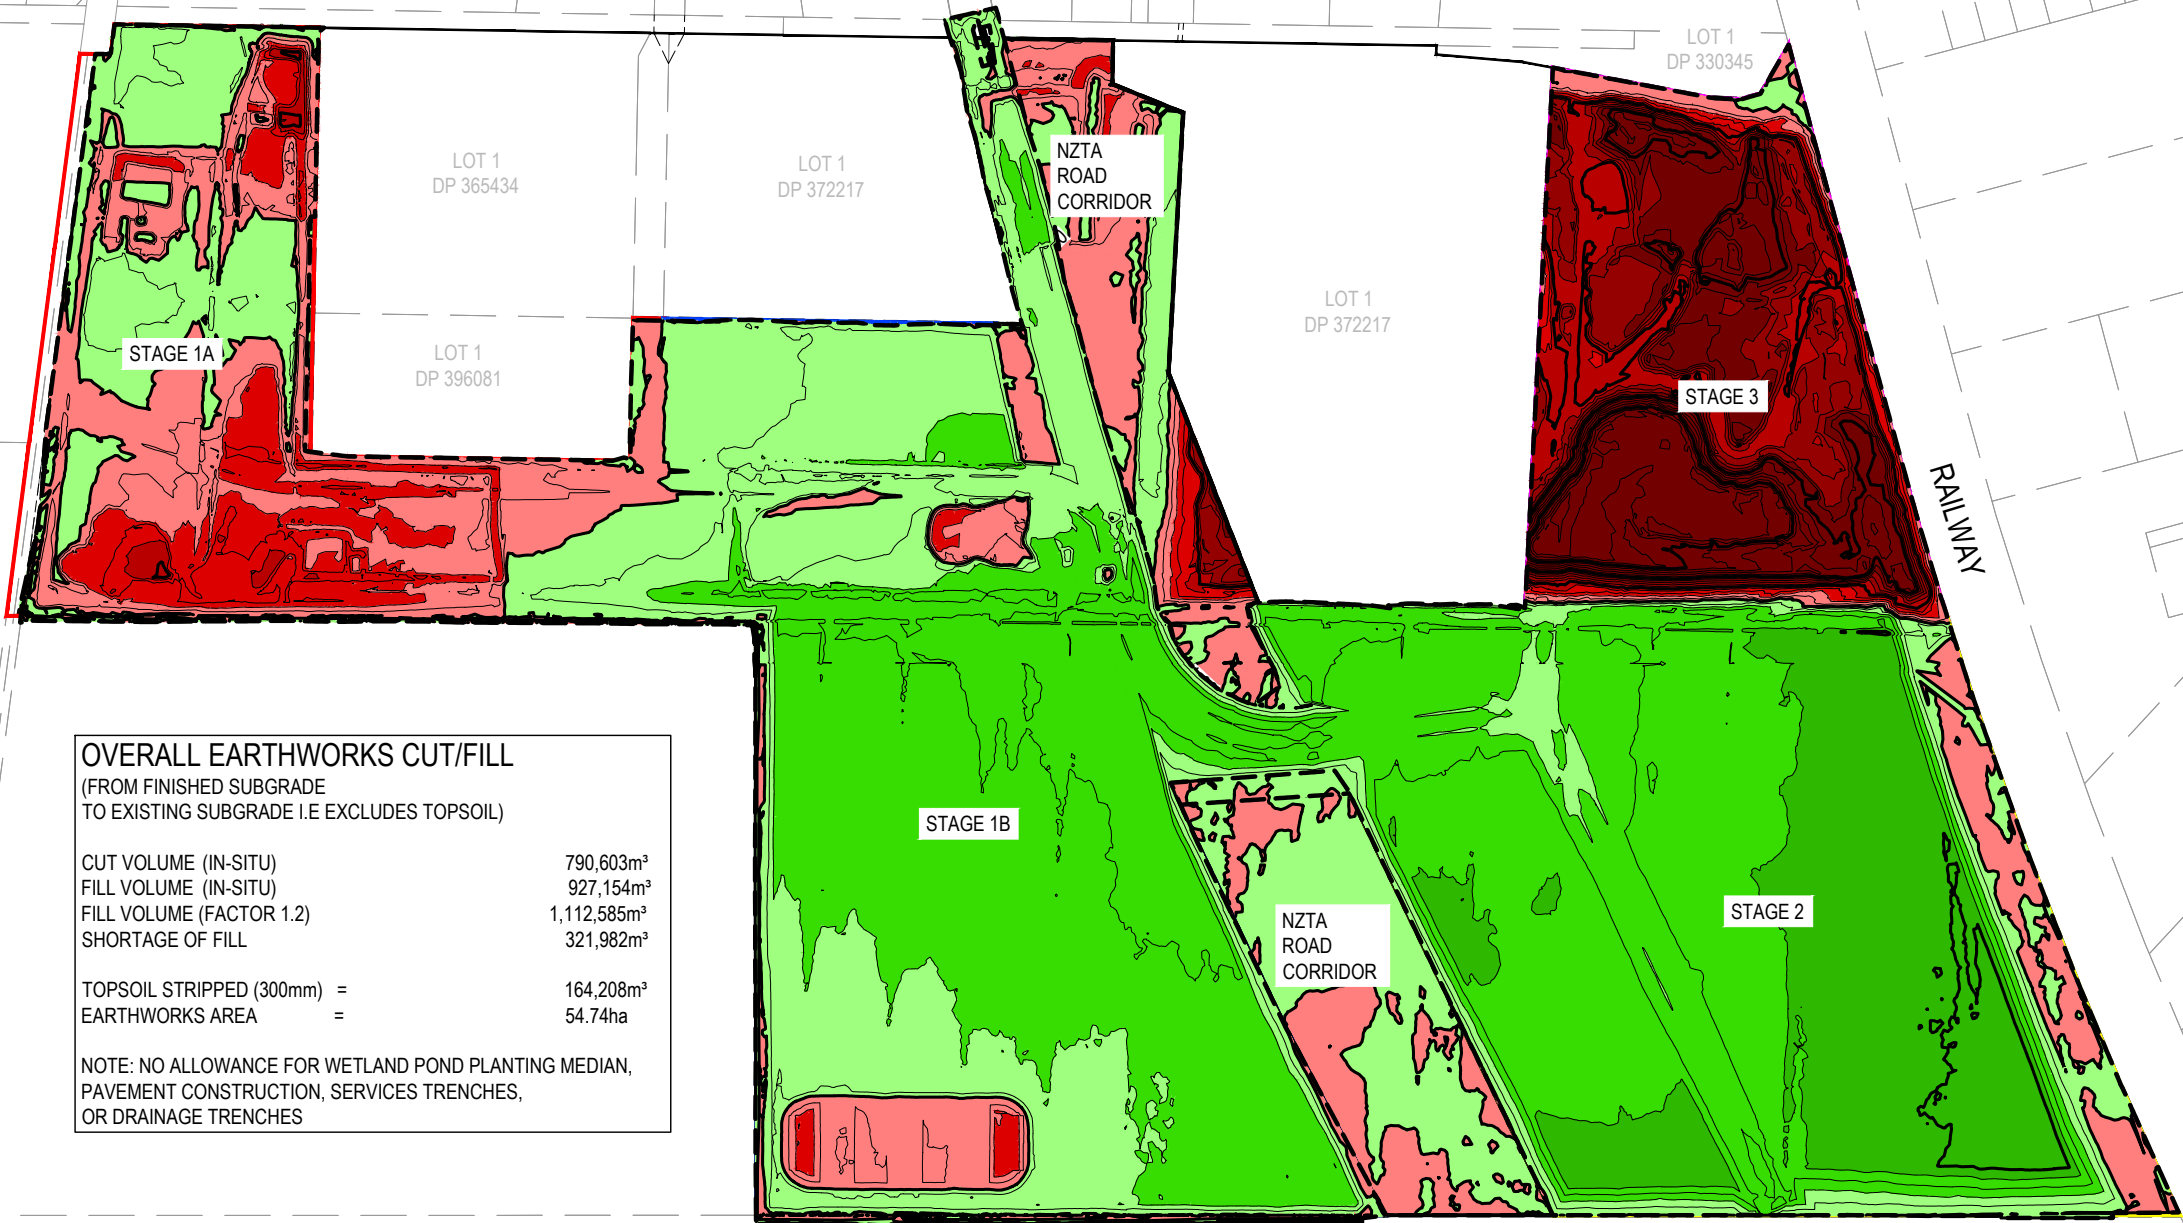

OVERALL EARTHWORKS CUT/FILL
(FROM FINISHED SUBGRADE
TO EXISTING SUBGRADE I.E EXCLUDES TOPSOIL)

CUT VOLUME (IN-SITU)

790,603m³

FILL VOLUME (IN-SITU)

927,154m³

FILL VOLUME (FACTOR 1.2)

1,112,585m³

SHORTAGE OF FILL

321,982m³

TOPSOIL STRIPPED (300mm) =

164,208m³

EARTHWORKS AREA =

54.74ha

NOTE: NO ALLOWANCE FOR WETLAND POND PLANTING MEDIAN,
PAVEMENT CONSTRUCTION, SERVICES TRENCHES,
OR DRAINAGE TRENCHES

- NOTES
- ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL COUNCIL EROSION AND SEDIMENT CONTROL: GUIDELINES FOR SOIL DISTURBING ACTIVITIES TR 2009/02.
 - COORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000
 - LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
 - IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
 - THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
 - THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.

Cut/Fill Table			
Number #	Minimum Elevation	Maximum Elevation	Color
1	-22.000	-20.000	
2	-20.000	-18.000	
3	-18.000	-16.000	
4	-16.000	-14.000	
5	-14.000	-12.000	
6	-12.000	-10.000	
7	-10.000	-8.000	
8	-8.000	-6.000	
9	-6.000	-4.000	
10	-4.000	-2.000	
11	-2.000	0.000	
12	0.000	2.000	
13	2.000	4.000	
14	4.000	6.000	

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
		By	Date
Survey	MAVEN		05/2025
Design	MKS		06/2026
Drawn	MKS		06/2026
Checked	SM		09/2026




Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
19 Kaimiro Street, Pukete
Hamilton 3200
New Zealand

Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED
CUT/FILL
OVERVIEW PLAN**

Project no.	298002		
Scale	1:5000 @ A3		
Cad file	298002-11-C220 EW CUT&FILL.DWG		
Drawing no.	C220	Rev	A

RESOURCE CONSENT



HIGGINS ROAD

WICKHAM STREET

STAGE 1A - EARTHWORKS CUT/FILL

(FROM FINISHED SUBGRADE
TO EXISTING SUBGRADE I.E EXCLUDES TOPSOIL)

CUT VOLUME (IN-SITU) 108,841m³
FILL VOLUME (IN-SITU) 10,334m³
FILL VOLUME (FACTOR 1.2) 8,612m³
SURPLUS OF CUT 98,507m³

TOPSOIL STRIPPED (300mm) = 24,786m³
EARTHWORKS AREA = 8.26ha

NOTE: NO ALLOWANCE FOR WETLAND POND PLANTING MEDIAN,
PAVEMENT CONSTRUCTION, SERVICES TRENCHES,
OR DRAINAGE TRENCHES

LOT 1
DP 396081

LOT 1
DP 486522

LOT 1 DPS 51437

LOT 1
DP 372217

NOTES

1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL COUNCIL EROSION AND SEDIMENT CONTROL: GUIDELINES FOR SOIL DISTURBING ACTIVITIES TR 2009/02.
2. COORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000
3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
5. THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
6. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.

Cut/Fill Table

Number #	Minimum Elevation	Maximum Elevation	Color
1	-22.000	-20.000	
2	-20.000	-18.000	
3	-18.000	-16.000	
4	-16.000	-14.000	
5	-14.000	-12.000	
6	-12.000	-10.000	
7	-10.000	-8.000	
8	-8.000	-6.000	
9	-6.000	-4.000	
10	-4.000	-2.000	
11	-2.000	0.000	
12	0.000	2.000	
13	2.000	4.000	
14	4.000	6.000	

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
		By	Date
Survey	MAVEN		05/2025
Design	MKS		06/2026
Drawn	MKS		06/2026
Checked	SM		09/2026



Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
19 Kaimiro Street, Pukete
Hamilton 3200
New Zealand

Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title PROPOSED CUT/FILL PLAN STAGE 1A			
Project no.	298002		
Scale	1:2000 @ A3		
Cad file	298002-11-C220 EW CUT&FILL.DWG		
Drawing no.	C220-1	Rev	A

RESOURCE CONSENT



LOT 1
DP 396081

LOT 1
DP 372217

LOT 1 DPS 51437

PART LOT 2 DPS 4764

LOT 2 DPS 51437

RESOURCE CONSENT

STAGE 1B - EARTHWORKS CUT/FILL (FROM FINISHED SUBGRADE TO EXISTING SUBGRADE I.E EXCLUDES TOPSOIL)

CUT VOLUME (IN-SITU) 16,426m³
FILL VOLUME (IN-SITU) 317,021m³
FILL VOLUME (FACTOR 1.2) 380,426m³
SHORTAGE OF FILL 364,000m³

TOPSOIL STRIPPED (300mm) = 54,745m³
EARTHWORKS AREA = 18.25ha

NOTE: NO ALLOWANCE FOR WETLAND POND PLANTING MEDIAN,
PAVEMENT CONSTRUCTION, SERVICES TRENCHES,
OR DRAINAGE TRENCHES

NOTES

1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL COUNCIL EROSION AND SEDIMENT CONTROL: GUIDELINES FOR SOIL DISTURBING ACTIVITIES TR 2009/02.
2. COORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000
3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
5. THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
6. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.

Cut/Fill Table

Number #	Minimum Elevation	Maximum Elevation	Color
1	-22.000	-20.000	
2	-20.000	-18.000	
3	-18.000	-16.000	
4	-16.000	-14.000	
5	-14.000	-12.000	
6	-12.000	-10.000	
7	-10.000	-8.000	
8	-8.000	-6.000	
9	-6.000	-4.000	
10	-4.000	-2.000	
11	-2.000	0.000	
12	0.000	2.000	
13	2.000	4.000	
14	4.000	6.000	

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
		By	Date
Survey	MAVEN		05/2025
Design	MKS		06/2026
Drawn	MKS		06/2026
Checked	SM		09/2026



Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED
CUT/FILL PLAN
STAGE 1B**

Project no.	298002		
Scale	1:2500 @ A3		
Cad file	298002-11-C220 EW CUT&FILL.DWG		
Drawing no.	C220-2	Rev	A




STAGE 2 - EARTHWORKS CUT/FILL

(FROM FINISHED SUBGRADE
TO EXISTING SUBGRADE I.E EXCLUDES TOPSOIL)

CUT VOLUME (IN-SITU)	1,042m³
FILL VOLUME (IN-SITU)	556,006m³
FILL VOLUME (FACTOR 1.2)	667,207m³
SHORTAGE OF FILL	666,166m³

TOPSOIL STRIPPED (300mm)	=	51,542m³
EARTHWORKS AREA	=	17.18ha

NOTE: NO ALLOWANCE FOR WETLAND POND PLANTING MEDIAN,
PAVEMENT CONSTRUCTION, SERVICES TRENCHES,
OR DRAINAGE TRENCHES

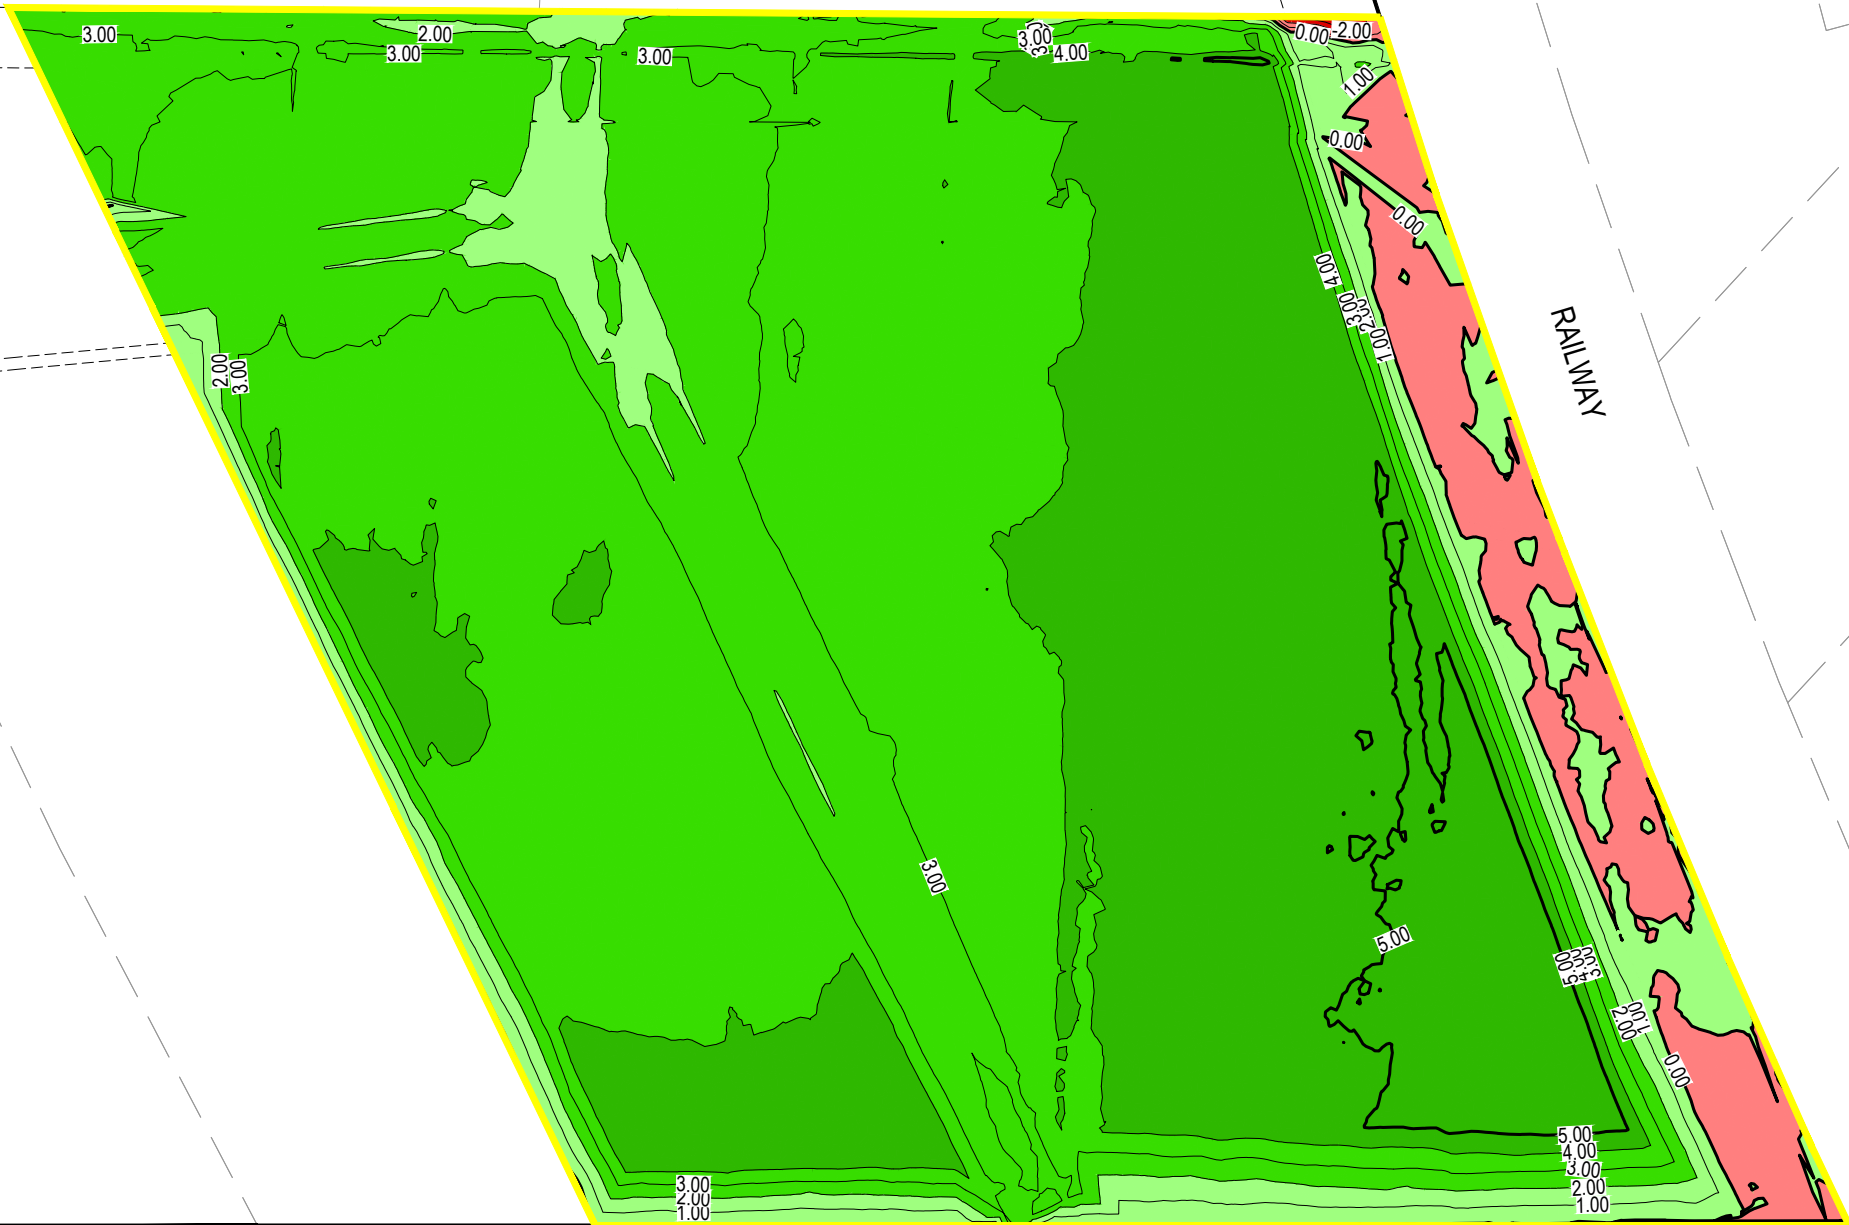

NOTES

1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL COUNCIL EROSION AND SEDIMENT CONTROL: GUIDELINES FOR SOIL DISTURBING ACTIVITIES TR 2009/02.
2. COORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000
3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
5. THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
6. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.

Cut/Fill Table			
Number #	Minimum Elevation	Maximum Elevation	Color
1	-22.000	-20.000	
2	-20.000	-18.000	
3	-18.000	-16.000	
4	-16.000	-14.000	
5	-14.000	-12.000	
6	-12.000	-10.000	
7	-10.000	-8.000	
8	-8.000	-6.000	
9	-6.000	-4.000	
10	-4.000	-2.000	
11	-2.000	0.000	
12	0.000	2.000	
13	2.000	4.000	
14	4.000	6.000	

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
		By	Date
Survey	MAVEN		05/2025
Design	MKS		06/2026
Drawn	MKS		06/2026
Checked	SM		09/2026



Project
SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM

Title
PROPOSED
CUT/FILL PLAN
STAGE 2

Project no.	298002		
Scale	1:2500 @ A3		
Cad file	298002-11-C220 EW CUT&FILL.DWG		
Drawing no.	C220-3	Rev	A

RESOURCE CONSENT

LOT 2 DPS 51437



LOT 1
DP 330345


STAGE 3 - EARTHWORKS CUT/FILL

(FROM FINISHED SUBGRADE
TO EXISTING SUBGRADE I.E EXCLUDES TOPSOIL)

CUT VOLUME (IN-SITU)	660,377m³
FILL VOLUME (IN-SITU)	1,794m³
FILL VOLUME (FACTOR 1.2)	1,495m³
SURPLUS OF CUT	658,583m³

TOPSOIL STRIPPED (300mm) =	22,891m³
EARTHWORKS AREA =	7.63ha

NOTE: NO ALLOWANCE FOR WETLAND POND PLANTING MEDIAN,
PAVEMENT CONSTRUCTION, SERVICES TRENCHES,
OR DRAINAGE TRENCHES

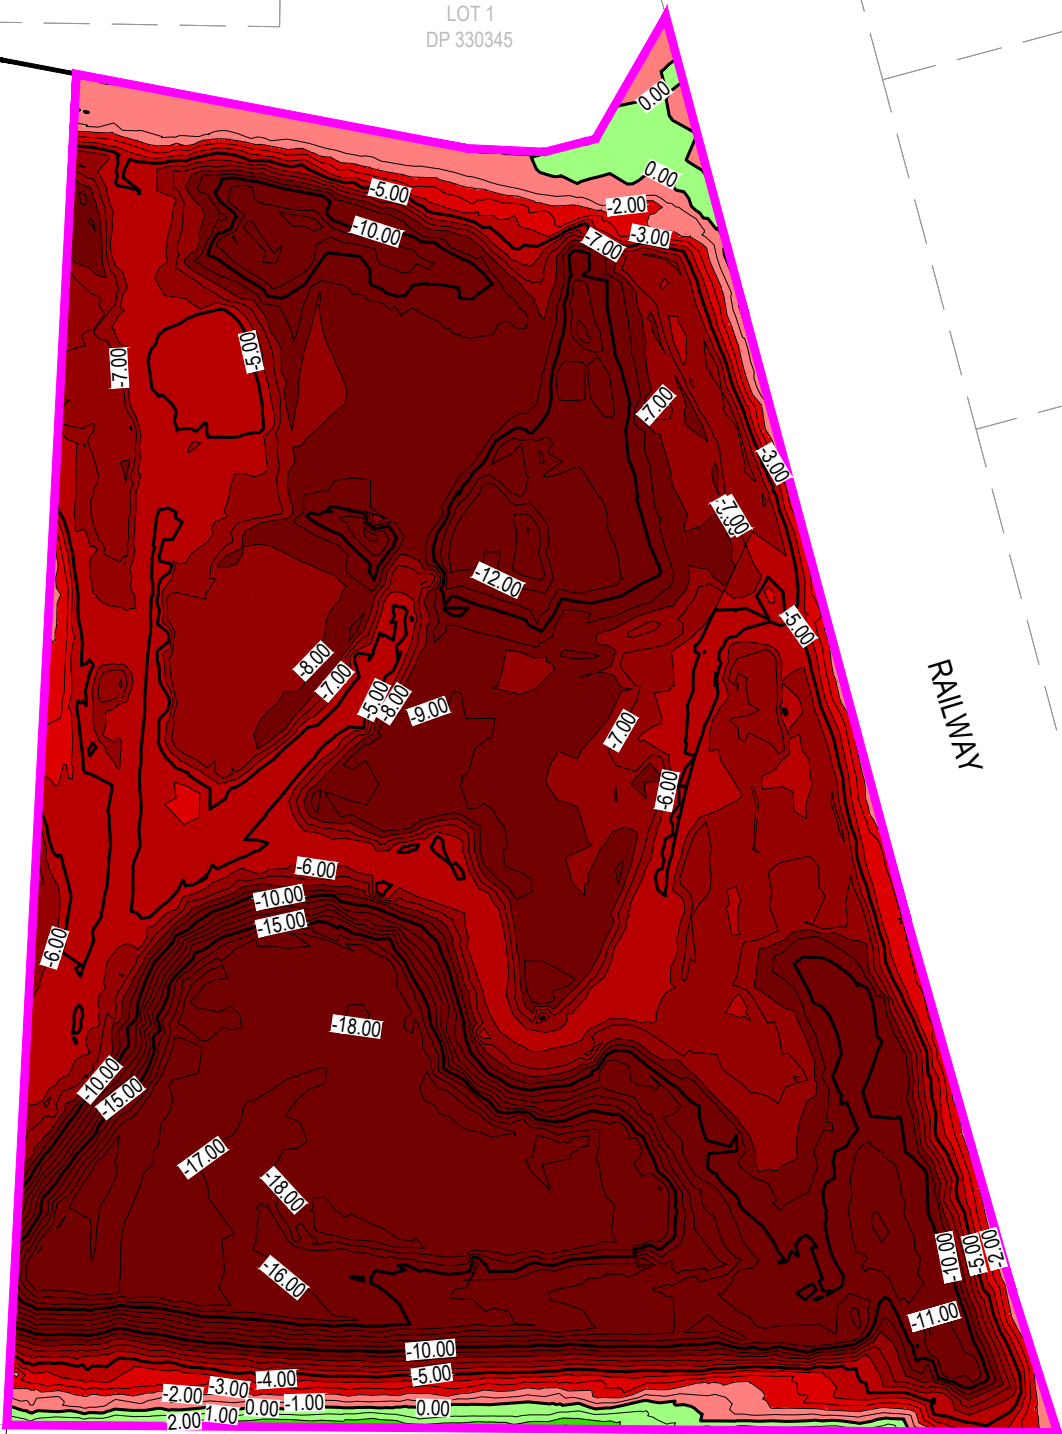

RAILWAY

RESOURCE CONSENT

NOTES

1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL COUNCIL EROSION AND SEDIMENT CONTROL: GUIDELINES FOR SOIL DISTURBING ACTIVITIES TR 2009/02.
2. COORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000
3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
5. THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
6. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.

Cut/Fill Table			
Number #	Minimum Elevation	Maximum Elevation	Color
1	-22.000	-20.000	
2	-20.000	-18.000	
3	-18.000	-16.000	
4	-16.000	-14.000	
5	-14.000	-12.000	
6	-12.000	-10.000	
7	-10.000	-8.000	
8	-8.000	-6.000	
9	-6.000	-4.000	
10	-4.000	-2.000	
11	-2.000	0.000	
12	0.000	2.000	
13	2.000	4.000	
14	4.000	6.000	


A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
		By	Date
Survey	MAVEN		05/2025
Design	MKS		06/2026
Drawn	MKS		06/2026
Checked	SM		09/2026

M Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
19 Kaimiro Street, Pukete
Hamilton 3200
New Zealand

Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED
CUT/FILL PLAN
STAGE 3**

Project no.	298002		
Scale	1:2000 @ A3		
Cad file	298002-11-C220 EW CUT&FILL.DWG		
Drawing no.	C220-4	Rev	A



KAHIKATEA DRIVE

WICKHAM STREET

RAILWAY

NZTA
ROAD
CORRIDOR

NZTA
ROAD
CORRIDOR

OVERALL EARTHWORKS CUT/FILL

(FROM FINISHED SUBGRADE
TO EXISTING SUBGRADE I.E EXCLUDES TOPSOIL)

CUT VOLUME (IN-SITU) 22,513m³
FILL VOLUME (IN-SITU) 55,558m³
FILL VOLUME (FACTOR 1.2) 66,669m³
SHORTAGE OF FILL 44,156m³

TOPSOIL STRIPPED (300mm) = 26,933m³
EARTHWORKS AREA = 8.98ha

NOTE: NO ALLOWANCE FOR WETLAND POND PLANTING MEDIAN,
PAVEMENT CONSTRUCTION, SERVICES TRENCHES,
OR DRAINAGE TRENCHES

NOTES

1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL COUNCIL EROSION AND SEDIMENT CONTROL: GUIDELINES FOR SOIL DISTURBING ACTIVITIES TR 2009/02.
2. COORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000
3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
5. THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
6. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.

Cut/Fill Table			
Number #	Minimum Elevation	Maximum Elevation	Color
1	-22.000	-20.000	
2	-20.000	-18.000	
3	-18.000	-16.000	
4	-16.000	-14.000	
5	-14.000	-12.000	
6	-12.000	-10.000	
7	-10.000	-8.000	
8	-8.000	-6.000	
9	-6.000	-4.000	
10	-4.000	-2.000	
11	-2.000	0.000	
12	0.000	2.000	
13	2.000	4.000	
14	4.000	6.000	

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
Survey	MAVEN		05/2025
Design	MKS		06/2026
Drawn	MKS		06/2026
Checked	SM		09/2026

M

A

E

N

Maven Waikato

07 242 0601

info@maven.co.nz

www.maven.co.nz

19 Kaimiro Street, Pukete

Hamilton 3200

New Zealand


Project
SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM

Title	
PROPOSED CUT/FILL PLAN NZTA CORRIDOR	
Project no.	298002
Scale	1:4000 @ A3
Cad file	298002-11-C220 EW CUT&FILL.DWG
Drawing no.	C220-5
Rev	A

PART LOT 2 DPS 4764

LOT 2 DPS 51437

RESOURCE CONSENT



KAHIKATEA DRIVE

WICKHAM STREET

NZTA
ROAD
CORRIDOR

RAILWAY

NZTA
ROAD
CORRIDOR

OVERALL EARTHWORKS CUT/FILL

(FROM FINISHED SUBGRADE
TO EXISTING SUBGRADE I.E EXCLUDES TOPSOIL)

CUT VOLUME (IN-SITU) 21,208m³
FILL VOLUME (IN-SITU) 52,024m³
FILL VOLUME (FACTOR 1.2) 62,429m³
SHORTAGE OF FILL 41,220m³

TOPSOIL STRIPPED (300mm) = 17,396m³
EARTHWORKS AREA = 5.80ha

NOTE: NO ALLOWANCE FOR WETLAND POND PLANTING MEDIAN,
PAVEMENT CONSTRUCTION, SERVICES TRENCHES,
OR DRAINAGE TRENCHES

NOTES

1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL COUNCIL EROSION AND SEDIMENT CONTROL: GUIDELINES FOR SOIL DISTURBING ACTIVITIES TR 2009/02.
2. COORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000
3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
5. THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
6. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.

Cut/Fill Table			
Number #	Minimum Elevation	Maximum Elevation	Color
1	-22.000	-20.000	
2	-20.000	-18.000	
3	-18.000	-16.000	
4	-16.000	-14.000	
5	-14.000	-12.000	
6	-12.000	-10.000	
7	-10.000	-8.000	
8	-8.000	-6.000	
9	-6.000	-4.000	
10	-4.000	-2.000	
11	-2.000	0.000	
12	0.000	2.000	
13	2.000	4.000	
14	4.000	6.000	

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
Survey	MAVEN		05/2025
Design	MKS		07/2026
Drawn	MKS		07/2026
Checked	SM		09/2026

M

A

E

N

Maven Waikato

07 242 0601

info@maven.co.nz

www.maven.co.nz

19 Kaimiro Street, Pukete

Hamilton 3200

New Zealand

Project
SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM


Title
PROPOSED
CUT/FILL PLAN
NZTA CORRIDOR OPT.2

Project no.	298002
Scale	1:4000 @ A3
Cad file	298002-11-C220 EW CUT&FILL.DWG
Drawing no.	C220-6
Rev	A

RESOURCE CONSENT


PART LOT 2 DPS 4764

LOT 2 DPS 51437



HIGGINS ROAD

WICKHAM STREET

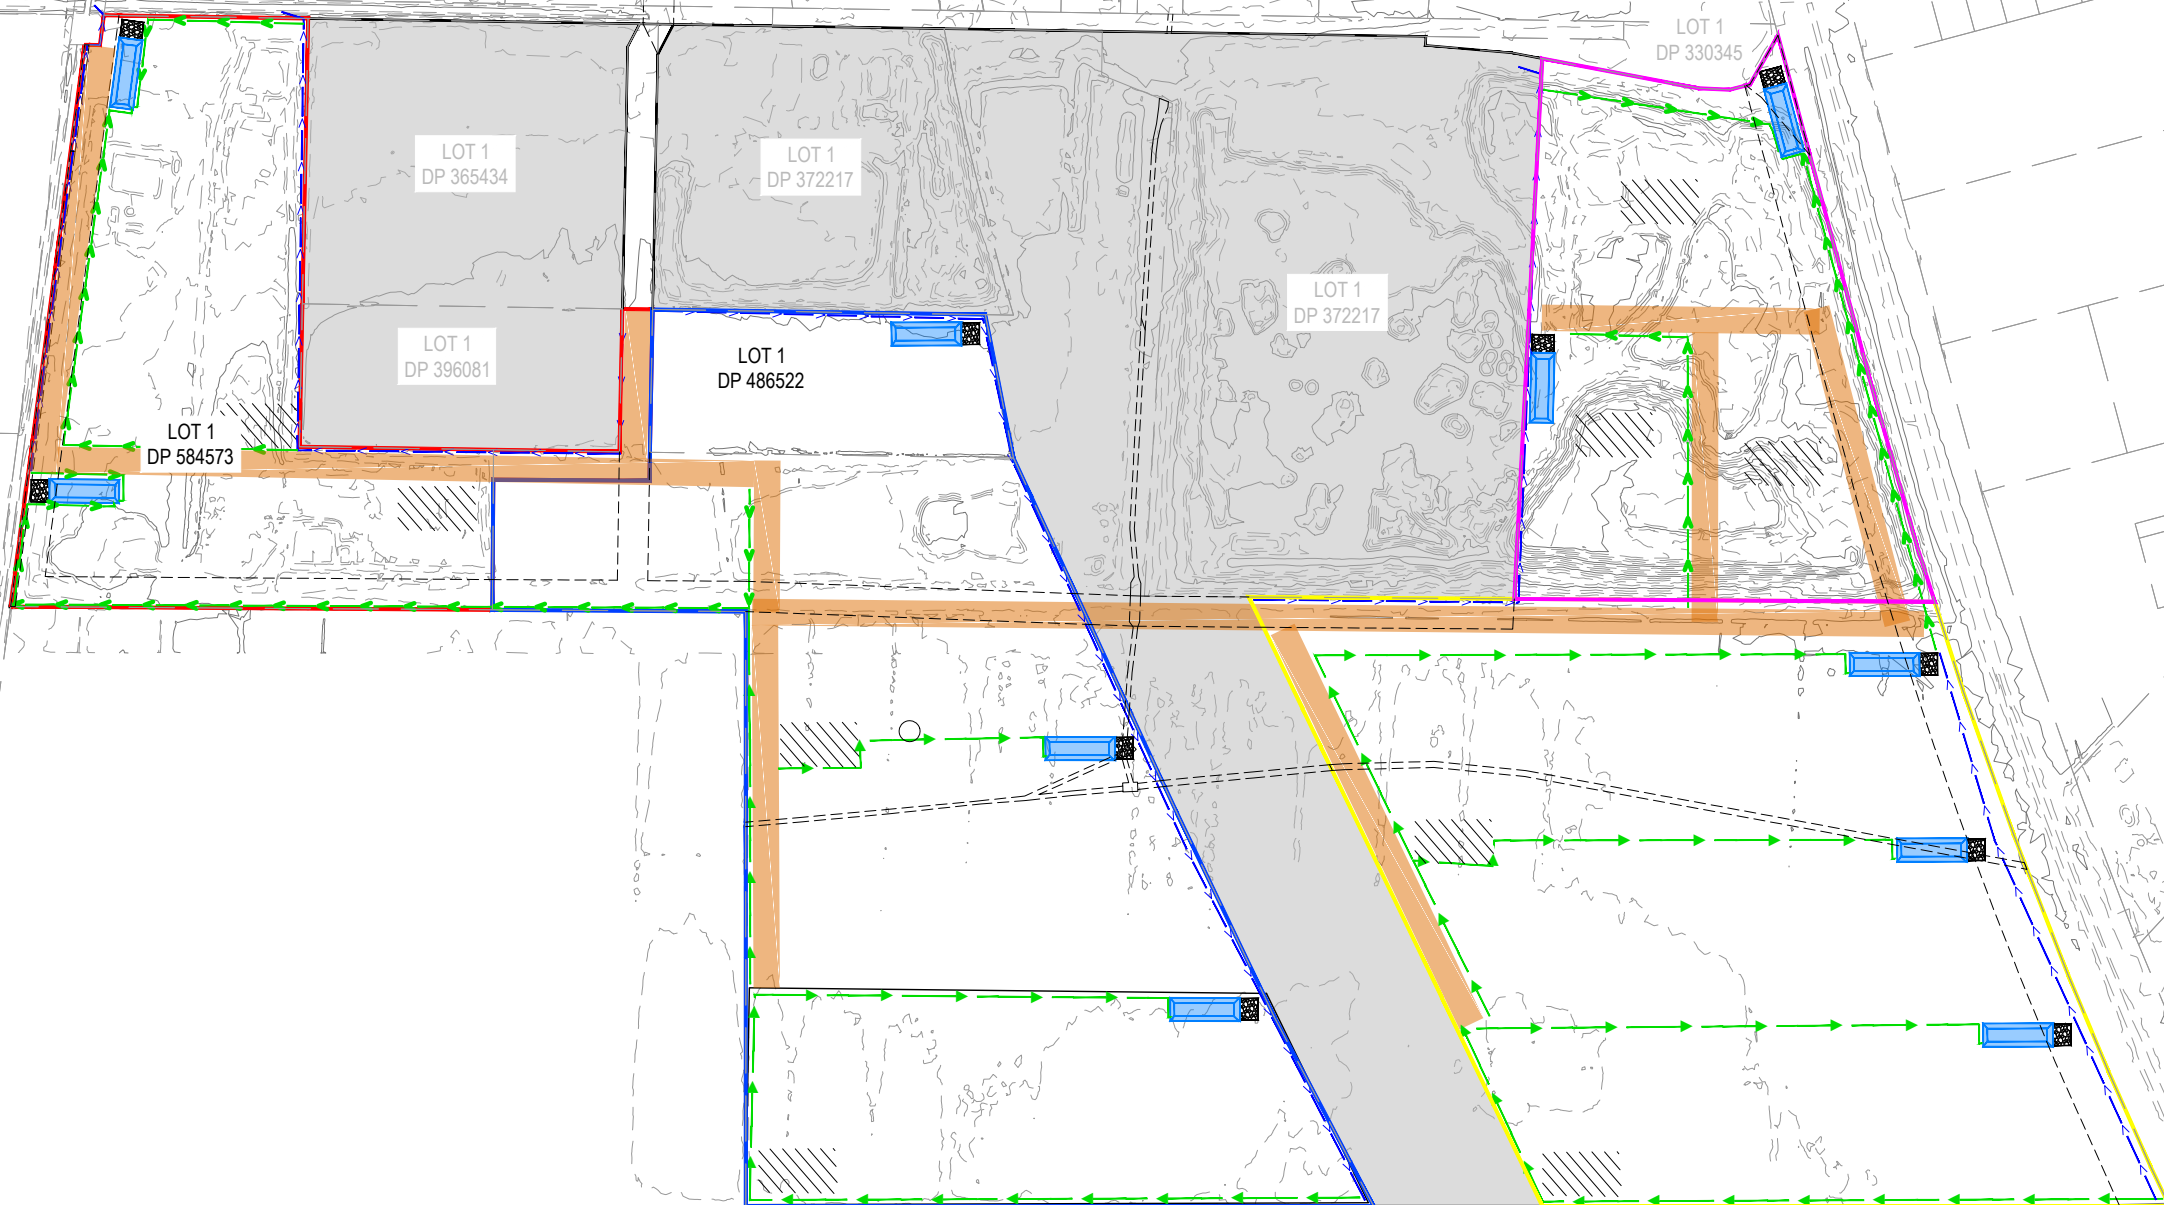

- NOTES
1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL COUNCIL EROSION AND SEDIMENT CONTROL: GUIDELINES FOR SOIL DISTURBING ACTIVITIES TR 2009/02.
 2. COORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000
 3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
 4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
 5. THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
 6. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.
 7. CONTRACTOR SHALL PROVIDE AS-BUILT OF WORKING SEDIMENT CONTROL DEVICES AND CONFIRMATION OF POND/DECENT VOLUMES TO ENGINEER.

- Legend
- EX BDY
 - PR MAJOR CONTOUR
 - PR MINOR CONTOUR
 - PR CLEAN WATER
 - PR DIRTY WATER
 - ESC HAUL ROAD
 - PR BDY STAGE 1A
 - PR BDY STAGE 1B
 - PR BDY STAGE 2
 - PR BDY STAGE 3

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
Survey	MAVEN		05/2025
Design	NDL		06/2026
Drawn	NDL		06/2026
Checked	SM		09/2026


M Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
19 Kaimiro Street, Pukete
Hamilton 3200
New Zealand

Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED OVERALL
EROSION & SEDIMENT
CONTROL PLAN**

Project no.	298002		
Scale	1:5000 @ A3		
Cad file	298002-11-C230 ESC.DWG		
Drawing no.	C230	Rev	A

RESOURCE CONSENT



PROPOSED
STABILISED
CONSTRUCTION
ENTRANCE AS PER
HCC & WRC
STANDARDS

HIGGINS ROAD

PROPOSED DIRTY WATER DIVERSION BUND AS
PER WRC STANDARDS

WICKHAM STREET

SRP 1A
CATCHMENT AREA 5.0Ha
VOLUME: 1500m³ (3% CATCHMENT AREA)
DEAD STORAGE 450m³ (30% VOLUME)
DIMENSION: 16.05m X 48.15
BOTTOM LEVEL: 35.8
TOP LEVEL: 37.30
EMERGENCY SPILLWAY: 16.05 X 0.3

PROPOSED DIRTY WATER DIVERSION BUND
AS PER WRC STANDARDS
CREST ALL BUNDS TO BE 0.3 HIGHER THEN
TOP OF RESPECTIVE TOP OF POND

PROPOSED CLEAN WATER
DIVERSION BUND AS PER HCC
& WRC STANDARDS

HAUL ROAD TO BE
CONSTRUCTED IN STAGE 1
FROM ENTRANCE TO STOCK
PILE AREA.
DROP OUT PITS EVERY 50m

PROPOSED STABILISED
CONSTRUCTION ENTRANCE AS PER
HCC & WRC STANDARDS

PROPOSED CLEAN WATER
DIVERSION BUND AS PER HCC &
WRC STANDARDS

PROPOSED STOCK
PILE 1 LOCATION TO
BE CONFIRMED ON
SITE AT
CONSTRUCTION

SRP 1C
CATCHMENT AREA 5.0Ha
VOLUME: 1500m³ (3% CATCHMENT AREA)
DEAD STORAGE 450m³ (30% VOLUME)
DIMENSION: 16.05m X 48.15
BOTTOM LEVEL: 39.4
TOP LEVEL: 40.90
EMERGENCY SPILLWAY: 16.05 X 0.3

POND TO BE CONSTRUCTED IN
STAGE 2 AREA TO BE USED IN
STAGE 1 AND 2

SRP 1B
CATCHMENT AREA 4.0Ha
VOLUME: 1500m³ (3% CATCHMENT AREA)
DEAD STORAGE 450m³ (30% VOLUME)
DIMENSION: 16.05m X 48.15
BOTTOM LEVEL: 37.1
TOP LEVEL: 38.60
EMERGENCY SPILLWAY: 16.05 X 0.3

PROPOSED STOCK
PILE 2 LOCATION TO
BE CONFIRMED ON
SITE AT
CONSTRUCTION

LOT 1 DPS 51437

RESOURCE CONSENT

NOTES

1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL COUNCIL EROSION AND SEDIMENT CONTROL: GUIDELINES FOR SOIL DISTURBING ACTIVITIES TR 2009/02.
2. COORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000
3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
5. THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
6. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.
7. CONTRACTOR SHALL PROVIDE AS-BUILT OF WORKING SEDIMENT CONTROL DEVICES AND CONFIRMATION OF POND/DECENT VOLUMES TO ENGINEER.

Legend

- EX BDY
- PR MAJOR CONTOUR
- PR MINOR CONTOUR
- PR CLEAN WATER
- PR DIRTY WATER
- ESC HAUL ROAD
- PR BDY STAGE 1A
- PR BDY STAGE 1B
- PR BDY STAGE 2
- PR BDY STAGE 3

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
Survey	MAVEN		05/2025
Design	NDL		06/2026
Drawn	NDL		06/2026
Checked	SM		09/2026



Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED STAGE 1A
EROSION & SEDIMENT
CONTROL PLAN**

Project no.	298002
Scale	1:2000 @ A3
Cad file	298002-11-C230 ESC.DWG
Drawing no.	C230-1
Rev	A



LOT 1
DP 396081

LOT 1
DP 486522

IT 1
72217

SRP 1C
CATCHMENT AREA 5.0Ha
VOLUME: 1500m² (3% CATCHMENT AREA)
DEAD STORAGE 450m² (30% VOLUME)
DIMENSION: 16.05m X 48.15
BOTTOM LEVEL: 39.4
TOP LEVEL: 40.90
EMERGENCY SPILLWAY: 16.05 X 0.3

PROPOSED CLEAN WATER
DIVERSION BUND AS PER HCC &
WRC STANDARDS

SRP 2A
CATCHMENT AREA 5.0Ha
VOLUME: 1500m² (3% CATCHMENT AREA)
DEAD STORAGE 450m² (30% VOLUME)
DIMENSION: 16.05m X 48.15
BOTTOM LEVEL: 39.4
TOP LEVEL: 40.90
EMERGENCY SPILLWAY: 16.05 X 0.3

SRP 2B
CATCHMENT AREA 5.0Ha
VOLUME: 1500m² (3% CATCHMENT AREA)
DEAD STORAGE 450m² (30% VOLUME)
DIMENSION: 16.05m X 48.15
BOTTOM LEVEL: 39.4
TOP LEVEL: 40.90
EMERGENCY SPILLWAY: 16.05 X 0.3

PROPOSED STOCK
PILE 3 LOCATION TO
BE CONFIRMED ON
SITE AT
CONSTRUCTION

PROPOSED DIRTY WATER DIVERSION BUNDS
AS PER WRC STANDARDS
CREST ALL BUNDS TO BE 0.3 HIGHER THEN
TOP OF RESPECTIVE TOP OF POND

LOT 1 DPS 51437

HAUL ROAD TO BE
CONSTRUCTED IN STAGE 2
FROM ENTRANCE TO STOCK
PILE AREA
ALL HAUL ROADS TO HAVE
DROP OUT PITS EVERY 50m

PROPOSED STOCK
PILE 4 LOCATION TO
BE CONFIRMED ON
SITE AT
CONSTRUCTION

PART LOT 2 DPS 4764

LOT 2 DPS 51437

NOTES

1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL COUNCIL EROSION AND SEDIMENT CONTROL: GUIDELINES FOR SOIL DISTURBING ACTIVITIES TR 2009/02.
2. COORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000
3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
5. THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
6. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.
7. CONTRACTOR SHALL PROVIDE AS-BUILT OF WORKING SEDIMENT CONTROL DEVICES AND CONFIRMATION OF POND/DECENT VOLUMES TO ENGINEER.

Legend

- EX BDY
- PR MAJOR CONTOUR
- PR MINOR CONTOUR
- PR CLEAN WATER
- PR DIRTY WATER
- ESC HAUL ROAD
- PR BDY STAGE 1A
- PR BDY STAGE 1B
- PR BDY STAGE 2
- PR BDY STAGE 3

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
Survey	MAVEN		05/2025
Design	NDL		06/2026
Drawn	NDL		06/2026
Checked	SM		09/2026



Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED STAGE 1B
EROSION & SEDIMENT
CONTROL PLAN**

Project no.	298002
Scale	1:2500 @ A3
Cad file	298002-11-C230 ESC.DWG
Drawing no.	C200-2
Rev	A

RESOURCE CONSENT



- NOTES
1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL COUNCIL EROSION AND SEDIMENT CONTROL: GUIDELINES FOR SOIL DISTURBING ACTIVITIES TR 2009/02.
 2. COORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000
 3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
 4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
 5. THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
 6. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.
 7. CONTRACTOR SHALL PROVIDE AS-BUILT OF WORKING SEDIMENT CONTROL DEVICES AND CONFIRMATION OF POND/DECENT VOLUMES TO ENGINEER.

- Legend
- EX BDY
 - PR MAJOR CONTOUR
 - PR MINOR CONTOUR
 - PR CLEAN WATER
 - PR DIRTY WATER
 - ESC HAUL ROAD
 - PR BDY STAGE 1A
 - PR BDY STAGE 1B
 - PR BDY STAGE 2
 - PR BDY STAGE 3

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
		By	Date
Survey	MAVEN		05/2025
Design	NDL		06/2026
Drawn	NDL		06/2026
Checked	SM		09/2026



Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED STAGE 2
EROSION & SEDIMENT
CONTROL PLAN**

Project no.	298002
Scale	1:2500 @ A3
Cad file	298002-11-C230 ESC.DWG
Drawing no.	C200-3
Rev	A

SRP 3A
CATCHMENT AREA 5.0Ha
VOLUME: 1500m³ (3% CATCHMENT AREA)
DEAD STORAGE 450m³ (30% VOLUME)
DIMENSION: 16.05m X 48.15
BOTTOM LEVEL: 40.00
TOP LEVEL: 41.50
EMERGENCY SPILLWAY: 16.05 X 0.3

SRP 3B
CATCHMENT AREA 5.0Ha
VOLUME: 1500m³ (3% CATCHMENT AREA)
DEAD STORAGE 450m³ (30% VOLUME)
DIMENSION: 16.05m X 48.15
BOTTOM LEVEL: 40.20
TOP LEVEL: 41.70
EMERGENCY SPILLWAY: 16.05 X 0.3

PROPOSED CLEAN WATER
DIVERSION BUND AS PER HCC &
WRC STANDARDS

SRP 3C
CATCHMENT AREA 5.0Ha
VOLUME: 1500m³ (3% CATCHMENT AREA)
DEAD STORAGE 450m³ (30% VOLUME)
DIMENSION: 16.05m X 48.15
BOTTOM LEVEL: 40.00
TOP LEVEL: 41.50
EMERGENCY SPILLWAY: 16.05 X 0.3

PROPOSED STOCK
PILE 5 LOCATION TO
BE CONFIRMED ON
SITE AT
CONSTRUCTION


PROPOSED DIRTY WATER DIVERSION
BUNDS AS PER WRC STANDARDS
CREST ALL BUNDS TO BE 0.3 HIGHER THEN
TOP OF RESPECTIVE TOP OF POND

HAUL ROAD TO BE
CONSTRUCTED IN STAGE 3
FROM ENTRANCE TO STOCK
PILE AREA
ALL HAUL ROADS TO HAVE
DROP OUT PITS EVERY 50m

PROPOSED STOCK
PILE 6 LOCATION TO
BE CONFIRMED ON
SITE AT
CONSTRUCTION

LOT 2 DPS 51437

RESOURCE CONSENT



PROPOSED DIRTY WATER DIVERSION
BUNDS AS PER WRC STANDARDS
CREST ALL BUNDS TO BE 0.3 HIGHER
THEN TOP OF RESPECTIVE TOP OF POND

PROPOSED STOCK PILE 7 LOCATION TO BE
CONFIRMED ON SITE AT CONSTRUCTION
STOCK PILE 7 AREA TO BE OPENED ONCE
SRP 1D IS INSTALLED AND APPROVED

LOT 1
DP 372217

SRP 4A
CATCHMENT AREA 5.0Ha
VOLUME: 1500m³ (3% CATCHMENT AREA)
DEAD STORAGE 450m³ (30% VOLUME)
DIMENSION: 16.05m X 48.15
BOTTOM LEVEL: 46.25
TOP LEVEL: 47.75
EMERGENCY SPILLWAY: 16.05 X 0.3

PROPOSED STOCK PILE 8
LOCATION TO BE CONFIRMED ON
SITE AT CONSTRUCTION
STOCK PILE 8 AREA TO BE
OPENED ONCE SRP 4A IS
INSTALLED AND APPROVED

LOT 1
DP 330345

SRP 1D
CATCHMENT AREA 5.0Ha
VOLUME: 1500m³ (3% CATCHMENT AREA)
DEAD STORAGE 450m³ (30% VOLUME)
DIMENSION: 16.05m X 48.15
BOTTOM LEVEL: 43.20
TOP LEVEL: 44.70
EMERGENCY SPILLWAY: 16.05 X 0.3

HAUL ROADS TO BE
CONSTRUCTED IN STAGE 1
FROM ENTRANCE TO STOCK
PILE AREA
ALL HAUL ROADS TO HAVE
DROP OUT PITS EVERY 50m

PROPOSED STOCK PILE 9 LOCATION TO
BE CONFIRMED ON SITE AT
CONSTRUCTION
STOCK PILE 9 AREA TO BE OPENED ONCE
SRP 1D IS INSTALLED AND APPROVED

- NOTES
1. ALL WORKS TO BE IN ACCORDANCE WITH WAIKATO REGIONAL COUNCIL EROSION AND SEDIMENT CONTROL: GUIDELINES FOR SOIL DISTURBING ACTIVITIES TR 2009/02.
 2. COORDINATES IN TERMS OF NZ GEODETIC DATUM MT EDEN 2000
 3. LEVELS IN TERMS OF THE NEW ZEALAND VERTICAL DATUM 2016.
 4. IT IS THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL SERVICES THAT MAY BE AFFECTED BY THEIR OPERATIONS.
 5. THE CONTRACTOR SHALL COMPLY WITH ALL RELEVANT HEALTH AND SAFETY REQUIREMENTS.
 6. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY APPROVAL FROM UTILITY OPERATORS BEFORE COMMENCING WORK UNDER OR NEAR THEIR SERVICES.
 7. CONTRACTOR SHALL PROVIDE AS-BUILT OF WORKING SEDIMENT CONTROL DEVICES AND CONFIRMATION OF POND/DECENT VOLUMES TO ENGINEER.

Legend			
	EX BDY		
	PR MAJOR CONTOUR		
	PR MINOR CONTOUR		
	PR CLEAN WATER		
	PR DIRTY WATER		
	ESC HAUL ROAD		
	PR BDY STAGE 1A		
	PR BDY STAGE 1B		
	PR BDY STAGE 2		
	PR BDY STAGE 3		

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
		By	Date
Survey	MAVEN		05/2025
Design	NDL		06/2026
Drawn	NDL		06/2026
Checked	SM		09/2026




Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED STAGE 3
EROSION & SEDIMENT
CONTROL PLAN**


Project no.	298002
Scale	1:2000 @ A3
Cad file	298002-11-C230 ESC.DWG
Drawing no.	C200-4
Rev	A

RESOURCE CONSENT


DATE: 8/21/26 FILEPATH: F:\MVEN\HAMILTON\6. PROJECTS\298002 - SILT FENCE\11\09\298002-H-C240 ESC DETAILS.DWG

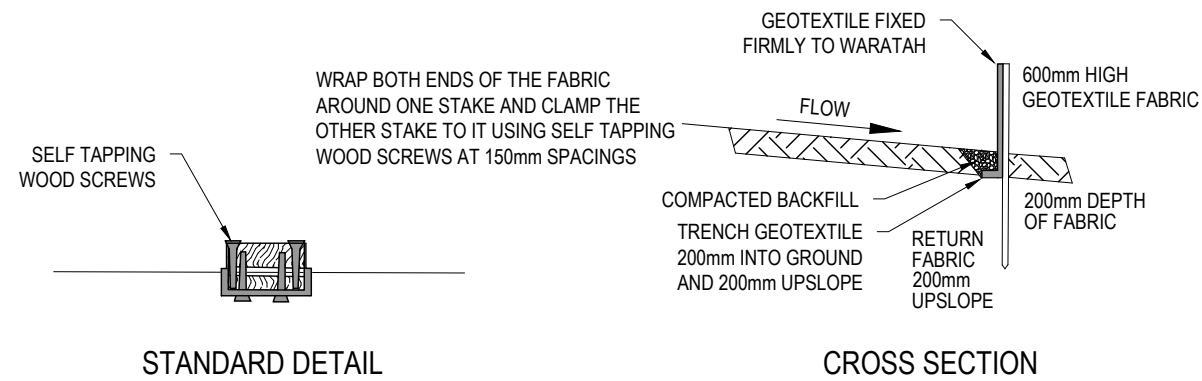

FABRIC JOIN

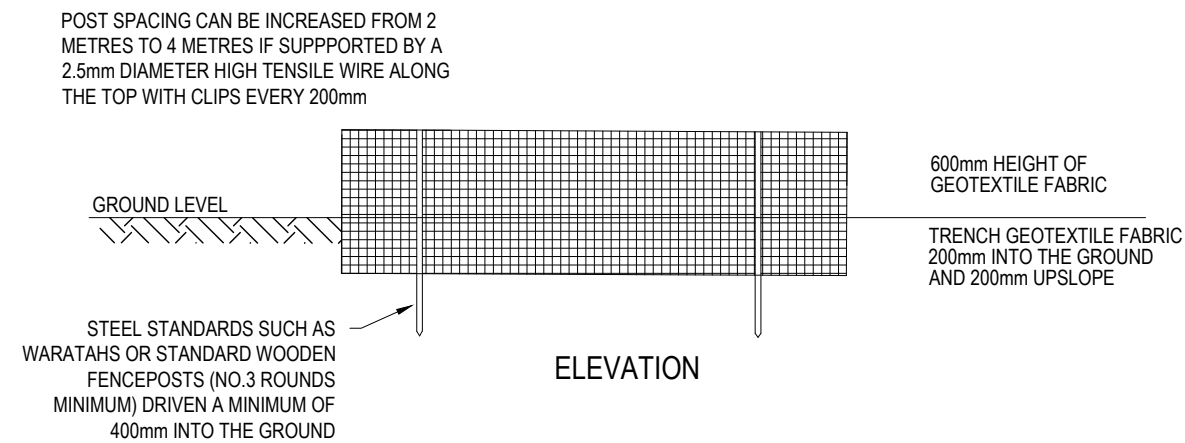

ELEVATION

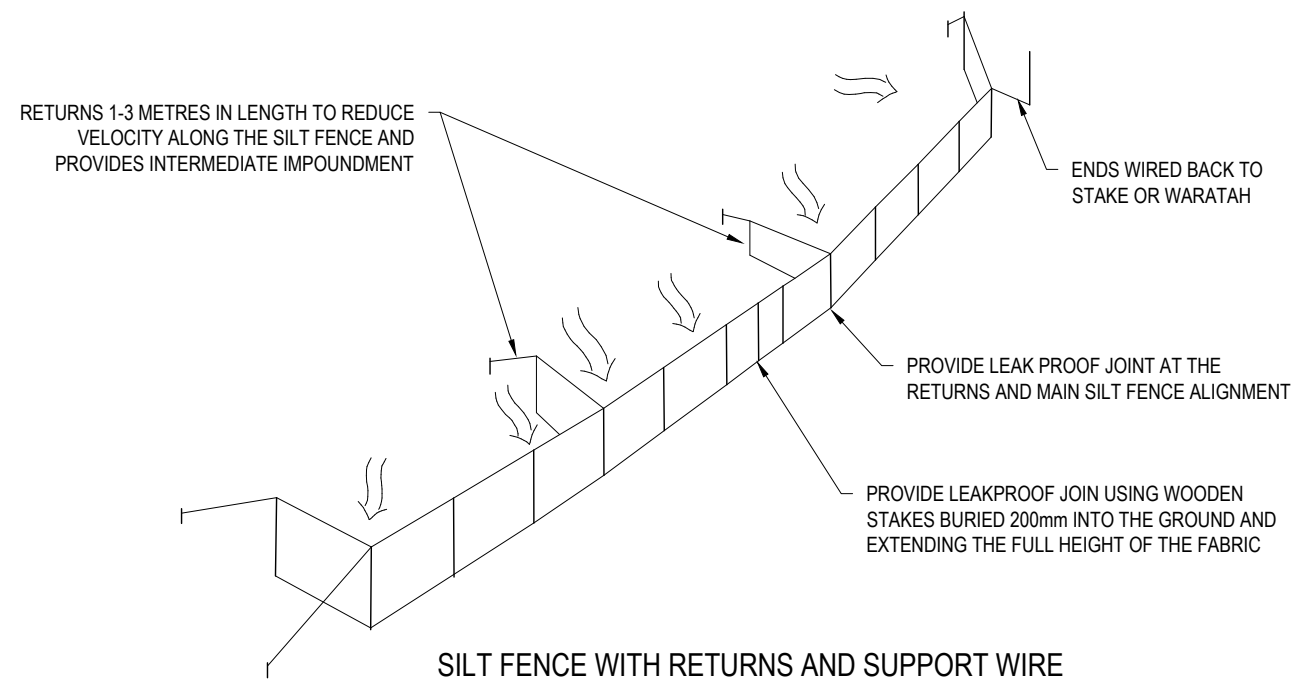

SILT FENCE WITH RETURNS AND SUPPORT WIRE

RESOURCE CONSENT





A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
		By	Date
Survey	-	-	
Design	MKS	06/2026	
Drawn	MKS	06/2026	
Checked	SM	09/2026	

M **A** **E** **N** **®**
Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
19 Kaimiro Street, Pukete
Hamilton 3200
New Zealand

Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED
EROSION & SEDIMENT
CONTROL DETAILS**

Project no.	298002
Scale	-
Cad file	298002-11-C240 ESC DETAILS.DWG
Drawing no.	C240-1
Rev	A

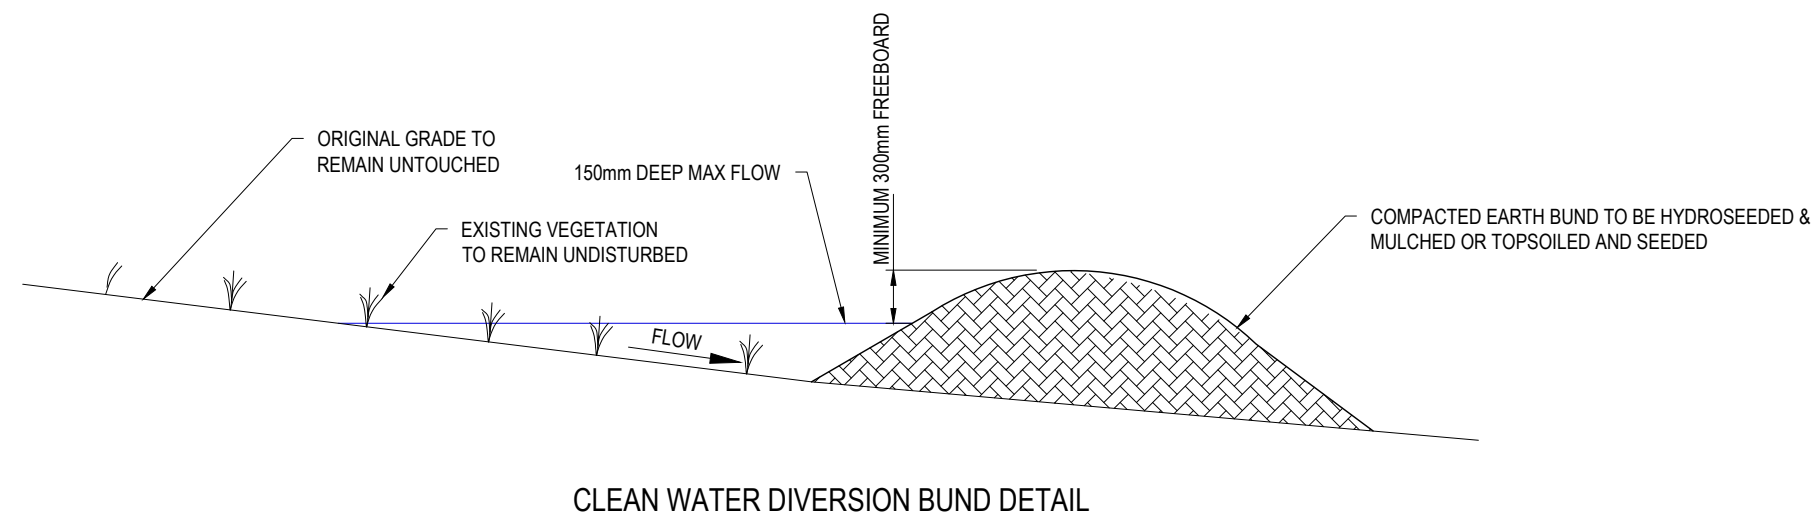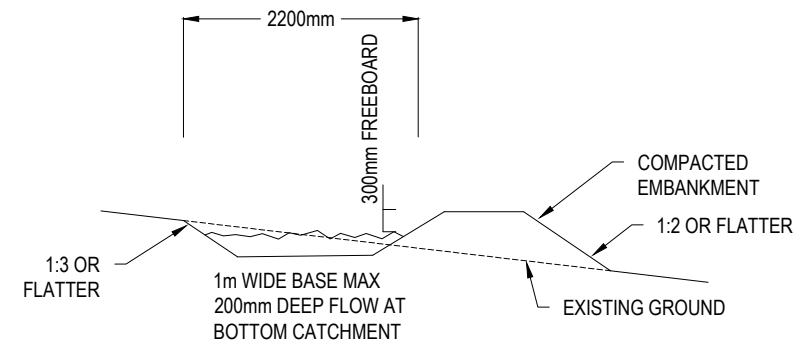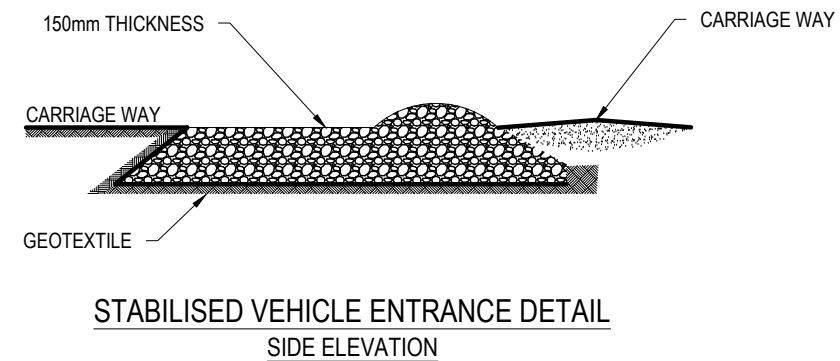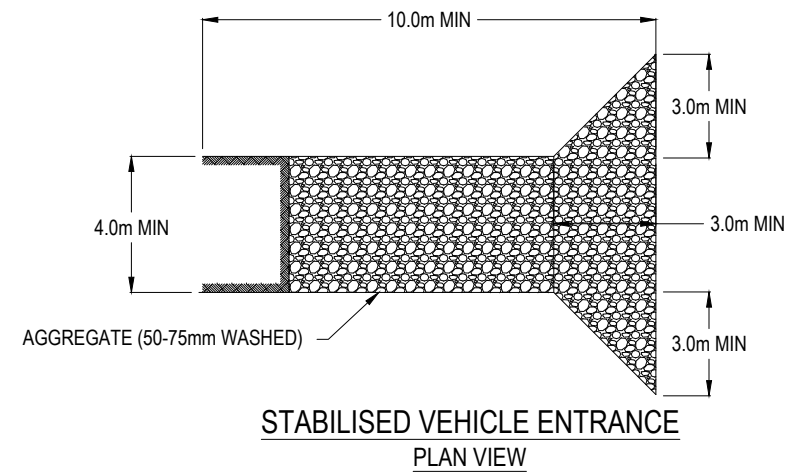

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
Survey	-		-
Design	MKS		06/2026
Drawn	MKS		06/2026
Checked	SM		09/2026

M **A** **E** **N** **®**



Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
19 Kaimiro Street, Pukete
Hamilton 3200
New Zealand

Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED
EROSION & SEDIMENT
CONTROL DETAILS**

Project no.	298002
Scale	-
Cad file	298002-11-C240 ESC DETAILS.DWG
Drawing no.	C240-2
Rev	A

RESOURCE CONSENT

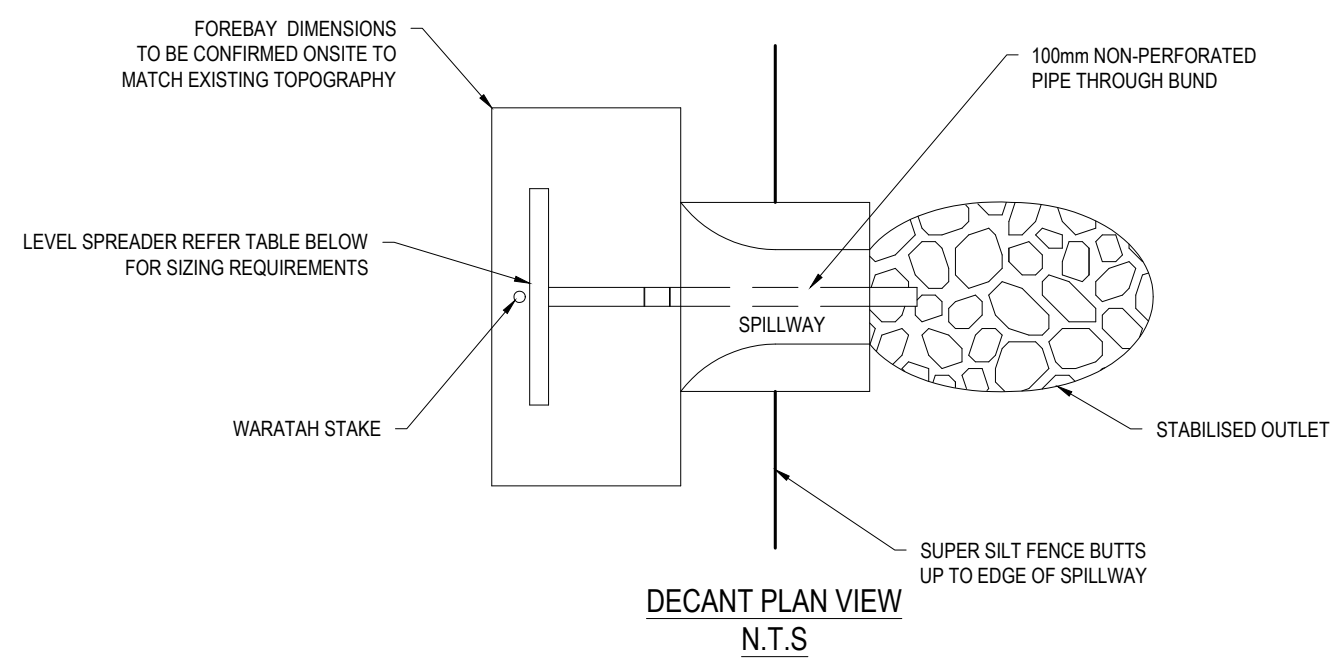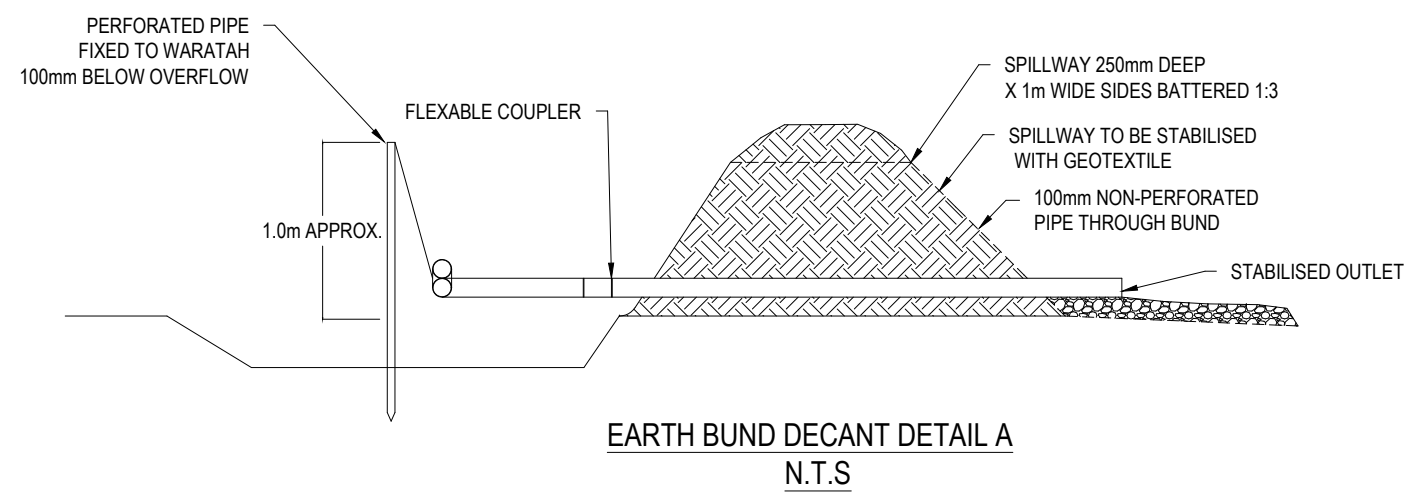

LEVEL SPREADER DESIGN CRITERIA (20 YEAR STORM EVENT)				
DESIGN FLOW (m ³ /sec)	INLET WIDTH (m)	DEPTH (m)	END WIDTH (m)	LENGTH (mm)
0-0.3	3	150	1	3
0.3-0.6	5	180	1	7
0.6-0.9	7	220	1	10

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
		By	Date
Survey	-		-
Design	MKS		06/2026
Drawn	MKS		06/2026
Checked	SM		09/2026




Maven Waikato
07 242 0601
info@maven.co.nz
www.maven.co.nz
19 Kaimiro Street, Pukete
Hamilton 3200
New Zealand


Project
**SOUTHERN LINKS 1
INDUSTRIAL STAGE 1
HAMILTON, WAIKATO
FOR SL1
NORTHERN CONSORTIUM**

Title
**PROPOSED
EROSION & SEDIMENT
CONTROL DETAILS**

Project no.	298002		
Scale	-		
Cad file	298002-11-C240 ESC DETAILS.DWG		
Drawing no.	C240-3	Rev	A

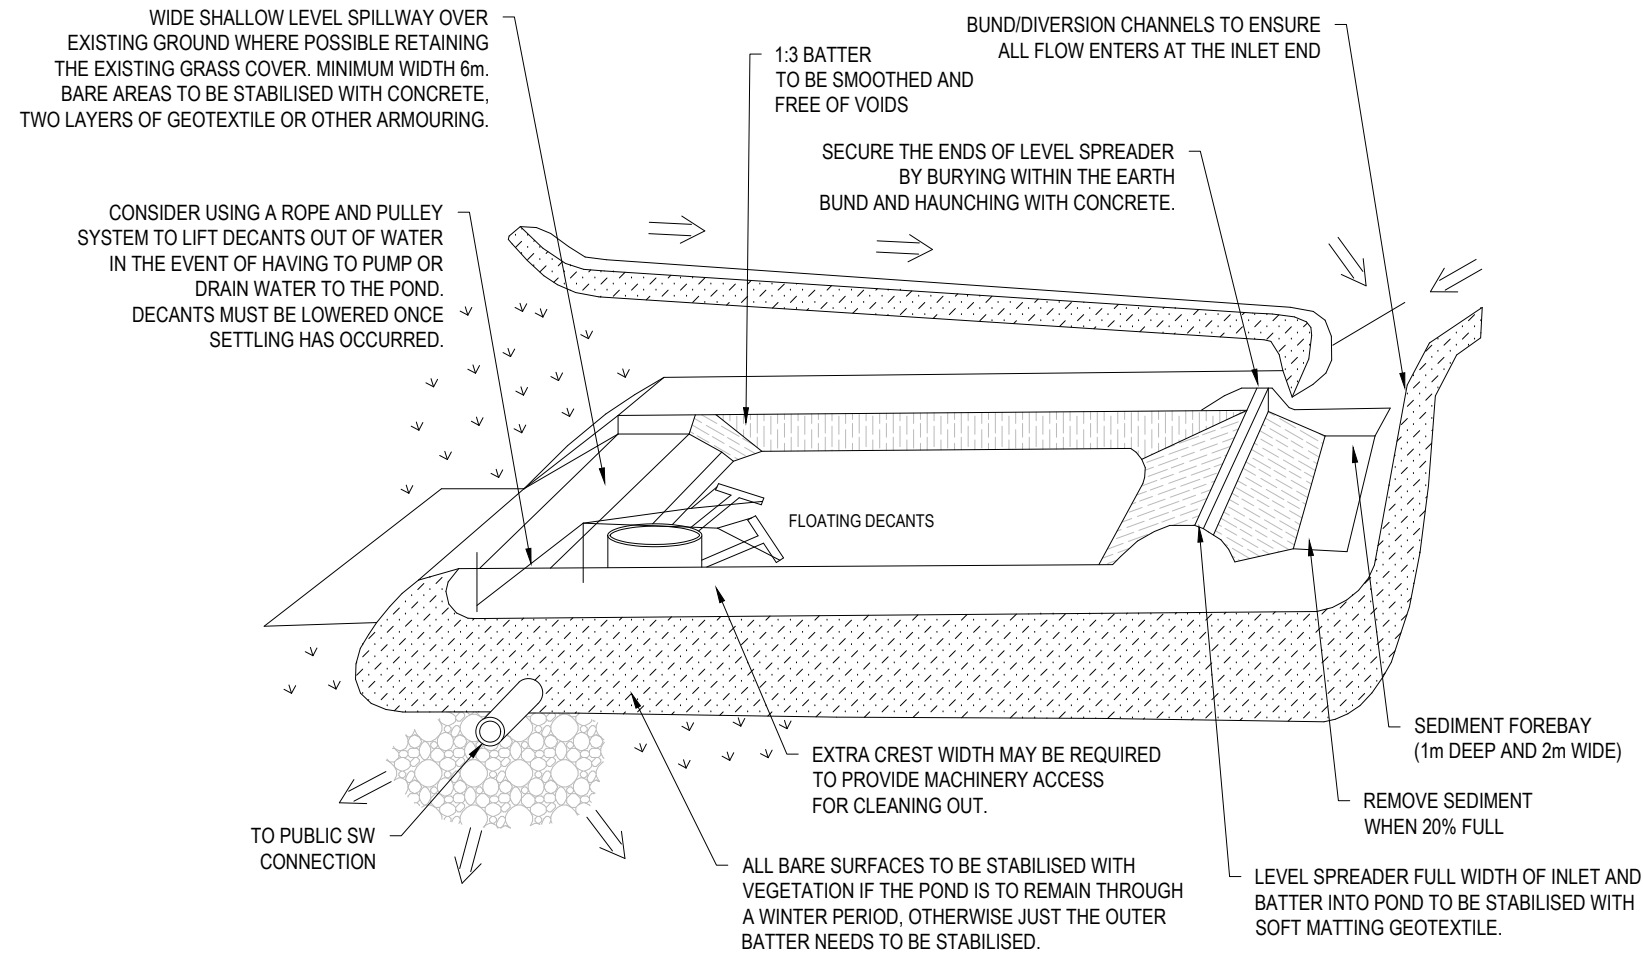

CROSS SECTION A-A OF SEDIMENT TREATMENT POND

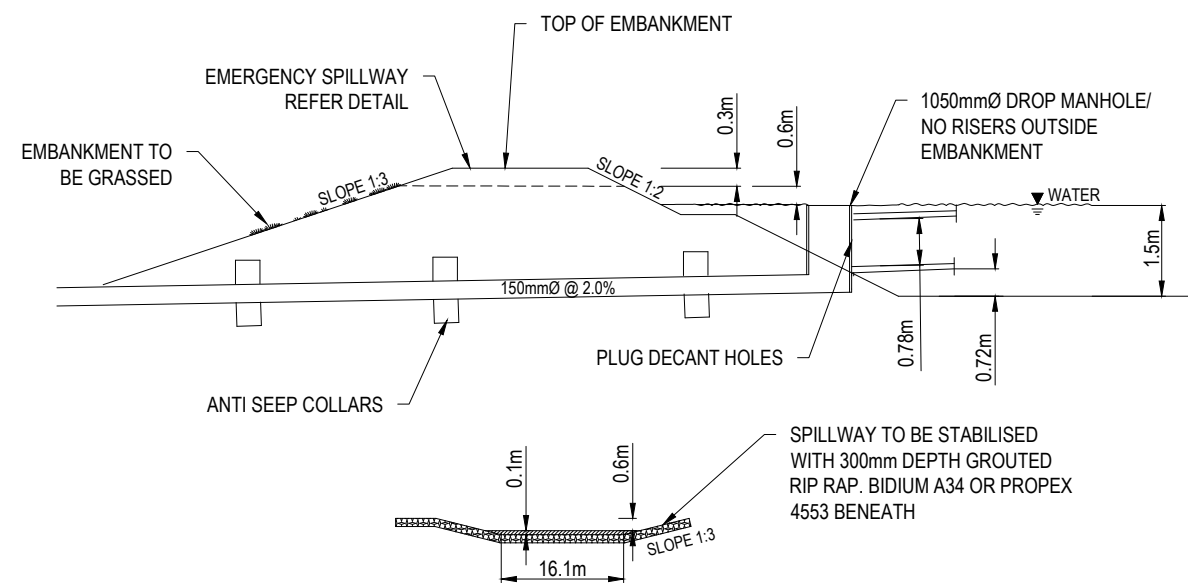

EMERGENCY SPILLWAY

A	FAST TRACK APP	MKS	09/2026
Rev	Description	By	Date
		By	Date
Survey	-	-	-
Design	MKS	06/2026	
Drawn	MKS	06/2026	
Checked	SM	09/2026	
M MAVEN Maven Waikato 07 242 0601 info@maven.co.nz www.maven.co.nz 19 Kaimiro Street, Pukete Hamilton 3200 New Zealand			
Project SOUTHERN LINKS 1 INDUSTRIAL STAGE 1 HAMILTON, WAIKATO FOR SL1 NORTHERN CONSORTIUM			
Title PROPOSED EROSION & SEDIMENT CONTROL DETAILS			
Project no.	298002		
Scale	-		
Cad file	298002-11-C240 ESC DETAILS.DWG		
Drawing no.	C240-4	Rev	A