

Fencing				
PW	1.2m Post & Wire	H4 post, 4mm wire and H3.2 battens. Timber stained with approved stain colour		
Code	Botanical Name	Common Name	Grade	Spacing
Specimen Trees - Streets				
	<i>Dacrydium cupressinum</i>	rimu	45L	Marked
	<i>Dacrycarpus dacrydioides</i>	kahikatea	45L	Marked

NOTES:

All plans are to be read in conjunction with Awa Architecture Plan Set and Maven Civil Plan Set.


Prior to excavating tree pits and planting specimen trees, confirm on site there are no clashes with underground services. Notify the Landscape Architect if any clashes are likely to occur.

All trees shall be at least 1.5m high at the time of planting and once established must be maintained at a height of at least 3m thereafter (with the exception of any proposed fruit trees)



SPECIMEN TREES

Proposed Solar Farm South
Refer to Drawing Number 2148

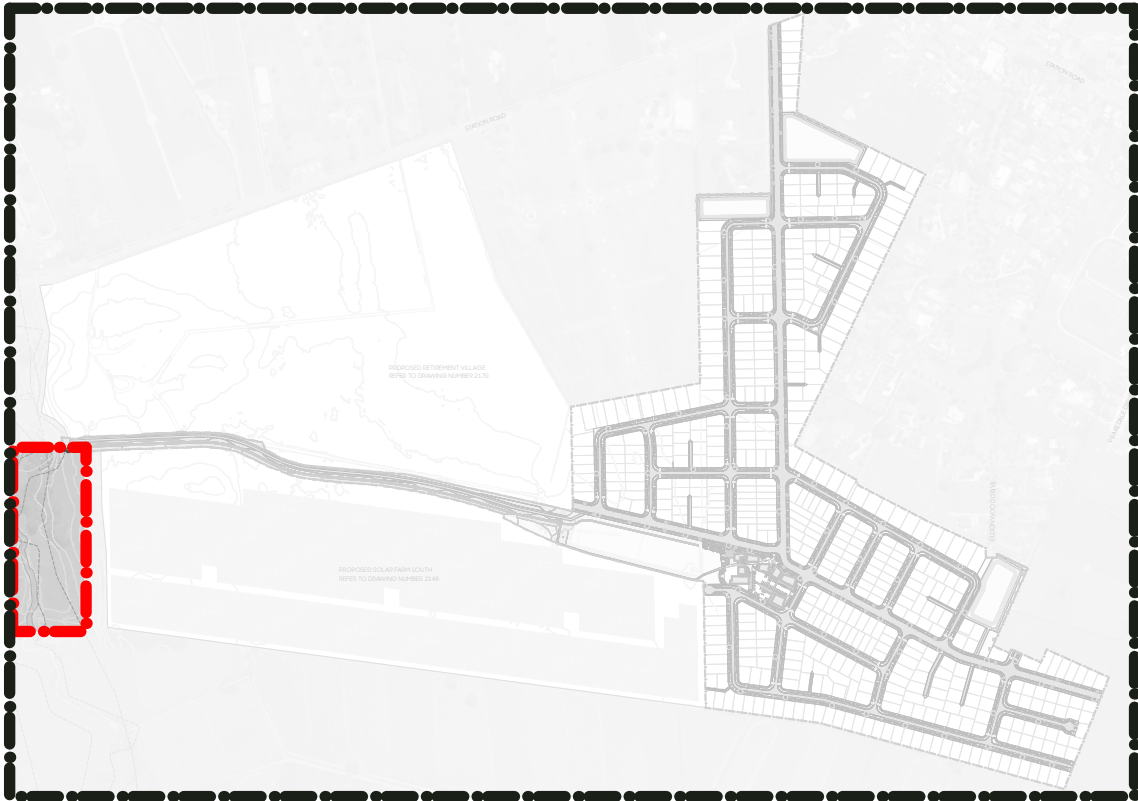

SHEET LOCATION PLAN - NTS