

6799 Busway between Waterview Interchange and Western Springs

Designation Number	6799
Requiring Authority	New Zealand Transport Agency
Location	Busway between Waterview Interchange and west of Western Springs Station
Lapse Date	The designation lapses if not given effect to within 25 years from the date on which it is included in the AUP

Purpose

The purpose of the designation is to construct, operate, maintain, and improve a rapid transit corridor, and ancillary structures, works and activities.

Conditions

The table below defines the acronyms and terms used in the designation conditions. Defined terms are capitalised.

Acronyms and defined terms

Acronym/term	Definition/meaning
Arterial Roads	As identified in the planning maps of the Auckland Unitary Plan
AUP	Auckland Unitary Plan 2026
BPO	Means the best method for preventing or minimising the adverse effects on the environment having regard, among other things, to: (a) the nature of the discharge or emission and the sensitivity of the receiving environment to adverse effects (b) the financial implications, and the effects on the environment, of that option when compared with other options (c) the current state of technical knowledge and the likelihood that the option can be successfully applied
CNVMP	Construction Noise and Vibration Management Plan
Completion of Construction	When construction of the Project (or part of the Project) is complete and it is available for use
CTMP	Construction Traffic Management Plan
Council	Auckland Council
Manager	The Manager – Resource Consents of Council, or authorised delegate
Outline Plan	An outline plan prepared in accordance with section 176A of the RMA
Particularly Vibration Sensitive building	(a) Former ASB building (AUP Scheduled Heritage Building 2798), 1210 Great North Road, Point Chevalier (Fee Simple, 1/1, Part Lot 16 Deposited Plan 2300) (b) Ambassador Theatre (AUP Scheduled Heritage Building 1680), 1218-1220 Great North, Point Chevalier (Fee Simple, 1/1, Part Lot 2 Deposited Plan 21452 and Part Lot 1 Deposited Plan 9064)

Acronym/term	Definition/meaning
Project	Te Ara Hauāuru Northwest Rapid Transit
Requiring Authority	NZ Transport Agency
RMA	Resource Management Act 1991
SQEP	A suitably qualified and experienced person, being a person who can provide sufficient evidence to demonstrate their suitability and competence.

SCHEDULE A: Project Boundary for the Northwest Rapid Transit Project

SCHEDULE B: Danger Rating Matrix and Flood Hazard Rating

SCHEDULE C: Supermarket Access – 1136 Great North Road, Point Chevalier

SCHEDULE D: Point Chevalier Properties

SCHEDULE E: Original Building Footprints, Commercial Building, Ambassador Theatre and Fisheries Building, Point Chevalier

SCHEDULE F: Former Chamberlain Clubhouse

SCHEDULE G: Tree Schedule

SCHEDULE H: Geotechnical Design Statement area

SCHEDULE I: Identified PPFs

Condition number	Condition
1.	This designation authorises the Project, being the construction, operation and maintenance of new bus rapid transit facilities alongside State Highway 16 from the Brigham Creek Road/SH16 intersection through to Ian McKinnon Drive in the Auckland City Centre and includes seven rapid transit stations and one Park and Ride facility, associated connections to the local bus and road network, ancillary structures, works, facilities and activities, all within the boundary shown in Schedule A*, including the following works: (a) A busway; (b) Bus stations, including facilities for the convenience of passengers; (c) With respect to 6791 and 6794, a Park and Ride facility; (d) Ancillary structures, works, facilities and activities, including: (i) bridges, underpasses, embankments, retaining walls; (ii) lighting, signs, gantries, acoustic barriers, landscaping; (iii) stormwater management, culverts, outfalls; (e) Realignment of, and connections to, the Northwestern Shared User Path; (f) Changes and connections to local roads to enable connectivity to bus stations; (g) Protection and relocation of existing utilities; and (h) All construction activities for the Project. If there is any inconsistency between the above description of the Project and the conditions, then the conditions prevail. * Except if there is any inconsistency between Schedule A and the boundary shown in the AUP, then the AUP will prevail.
2.	Lapse The designation lapses if not given effect to within 25 years from the date on which it is included in the AUP.
3.	Primary Designation (<i>Augier</i> condition) This designation must be considered as the primary (earlier) designation where it overlaps with designation 6801 Point Chevalier station.
4.	Outline Plan(s) and Management Plans (a) Outline Plan(s) may be submitted in parts or in stages to address particular activities (e.g., design or construction aspects), or to reflect the staged implementation of the Project. (b) Outline Plans must include (as relevant): (i) Form and Landscaping Statement (ii) Construction Noise and Vibration Management Plan (iii) Built Heritage Construction Management Plan (iv) Tree Protection Methodology unless otherwise stated in the conditions below.
5.	Conditions following Completion of Construction Following Completion of Construction, all conditions except Conditions 9,10, 17 and 40 cease to have effect and do not apply to any subsequent work associated with the on-going operation and maintenance of the Project.
PRECONSTRUCTION CONDITIONS	
6.	Cultural Values (<i>Augier</i> condition) (a) The Requiring Authority must engage with Ngāti Whātua Ōrākei, Te Ākitai Waiohū and Ngaati Te Ata Waiohū during detailed design to identify how their cultural values will be reflected in the Project. (b) A statement summarising how engagement undertaken in accordance with (a) has informed how cultural values are reflected in the Project is to be provided to the Council for information only with an Outline Plan(s).

Condition number	Condition
7.	Flood Hazard For the purposes of Condition 8: (a) Danger Rating means low (green), moderate (yellow) or high (red) danger rating determined in accordance with Schedule B. (b) Building/s means any residential, commercial or community building that has been lawfully established, or is authorised by a building consent at the time the Outline Plan is submitted. Sheds, garages and other ancillary buildings are excluded. (c) Maximum Probable Development is the maximum impervious area permitted in the zone/s in the AUP at the time the Outline Plan is submitted, or 70% impervious area if the land is zoned Future Urban in the AUP. (d) Pre-Project Development means the Maximum Probable Development at the time the Outline Plan is submitted. (e) Project Development means the Pre-Project Development and the Project.
8.	(a) The Project must be designed so that it does not cause the following beyond the Designation: (i) An increase in Danger Rating; and (ii) Either: A. A more than 50mm increase in flood level on land parcels with Building(s) and a Low Danger Rating; or B. A more than 100mm increase in flood level on: I. land parcels with no Building(s) present; and II. land parcels with Building(s) and a Moderate or High Danger Rating. (b) Compliance with (a) must be demonstrated through flood modelling: (i) To show the difference in the 1% Annual Exceedance Probability (AEP) flood levels for Pre-Project Development and Project Development; (ii) Using 332mm for the 24 hour rainfall depth that includes a 3.8 degree Celsius increase in temperature for climate change; and (iii) Undertaken by a SQEP. (c) The Requiring Authority does not need to comply with (a) if the relevant landowner agrees to an alternative approach. (d) In the Outline Plan, the Requiring Authority must: (i) demonstrate how (a) will be complied with by reference to flood modelling undertaken in accordance with (b); or (ii) provide confirmation of any written agreement secured to reflect landowner agreement pursuant to (c) above. Advice Note: <i>Where the diversion and discharge of stormwater runoff is to the reticulated public stormwater network, it must comply with the requirements of Auckland Council Healthy Waters & Flood Resilience Regionwide Network Discharge Consent.</i>
9.	Supermarket Access – 1136 Great North Road, Point Chevalier For the purposes of Condition 10 and Condition 11: (a) “Supermarket” means the supermarket located at 1136 Great North Road, Point Chevalier, being Lot 1-2 Deposited Plan 390127 and Lot 4 Deposited Plan 14537 and Lot 3 Deposited Plan 99933. (b) “Supermarket loading zone” means the area shown on Schedule C. (c) “Delivery Vehicle(s)” means a 23m HPMV B-train and a 19.5m HPMV semi-trailer.

Condition number	Condition
	(d) “Manoeuvrability” means compliance with RTS-18 New Zealand on-road tracking curves for heavy motor vehicles with a 12.5m radius of turn. (e) “NTC” means the National Trading Company of NZ Limited, being the owner of the Supermarket site, or its successor in title and Modern Merchants Limited, being the leaseholder of the Supermarket site.
10.	The Requiring Authority must design the Project so that: (a) There is a permanent vehicle access point for Delivery Vehicles from Parr Road North to the Supermarket loading zone that complies with the Auckland Transport –Transport Design Manual (TDM) standard engineering details for a commercial vehicle crossing as at the time of designation. (b) Manoeuvrability for Delivery Vehicles is achieved from the permanent vehicle access point on Parr Road North to the Supermarket loading zone enabling Delivery Vehicle access in and out of the access point in a forward direction.
11.	(a) The Requiring Authority must consult with NTC when preparing the relevant CTMP required by Condition 14. (b) During Project construction, the Requiring Authority must maintain vehicle access and Manoeuvrability for Delivery Vehicles from Parr Road North to the Supermarket loading zone between 3am-10pm, 7 days a week. (c) In the event the Requiring Authority considers it is not practicable to comply with (b) above, the Requiring Authority must: (i) Before the relevant construction works, advise NTC in writing: A. why it considers it is not practicable to comply with (b) above; and B. set out proposed alternative arrangements for Delivery Vehicles to service the Supermarket; (ii) Allow 10 working days for NTC to give feedback on (c)(i) above; (iii) Consider any written feedback from NTC and address any concerns raised by NTC to the extent practicable; (iv) Within 5 working days of receiving any feedback from NTC and at least 15 working days before the relevant construction works, advise NTC: A. why it has determined that it is not practicable to comply with (b) above, having considered any additional information provided by NTC; B. what feedback it has or has not accepted and why; and C. confirm the alternative access arrangements for Delivery Vehicles; (v) In all cases: A. minimise the duration of disruption to Delivery Vehicles; (vi) maintain vehicle access and Manoeuvrability for Delivery Vehicles from Parr Road North to the Supermarket loading zone for a minimum of 14 hours per day, 7 days a week. (d) Condition 11(b) and (c) must not apply in the case of an unforeseen emergency, however the Requiring Authority must minimise as far as practicable the duration of disruption to Delivery Vehicles in that event.
11.	Crime Prevention through Environmental Design The Requiring Authority must design the Project to provide for personal safety by taking into account the National Guidelines for Crime Prevention through Environmental Design in New Zealand (November 2005), or any subsequent version.
12.	Form and Landscaping Statement (a) The Requiring Authority must prepare a Form and Landscaping Statement to be submitted with the relevant outline plan(s) for each stage of work. The objective of the Form and Landscaping

Condition number	Condition
	Statement is to describe how the design of the permanent Project works has responded to the immediately adjoining environment. (b) To achieve the objective noted in (a) above, the Form and Landscaping Statement must provide a summary description of how the design of the permanent Project works for that stage of work has approached: (i) the height, shape, and bulk of major structures - including stations, bridges, underpasses, retaining walls and noise barriers, where relevant; (ii) any walking and cycling connections with the adjacent network; (iii) the likely finished contour – including the extent and angle of batter slopes; (iv) the landscaping - including the location of any planting that is required under Condition 27 (Landscape Planting); and (v) the interface with adjacent land use including open space zones. Advice note: <i>During development of design for the Project, the Requiring Authority will work collaboratively with the Council when considering the above matters. The Form and Landscaping Statement will be informed by that work.</i>
13.	Project information The Requiring Authority must maintain a website page, or equivalent online information source (Project website) which provides information updates on progress being made towards implementation of the Project. Prior to commencement of construction, the information provided on the Project website will be updated at six (6) monthly intervals. After commencement of construction of a particular stage of the Project, the information in relation to that part under construction will be updated at a minimum of three (3) monthly intervals until that part is completed.
CONSTRUCTION CONDITIONS	
14.	Construction Traffic Management Plan (CTMP) (a) The CTMP must be prepared prior to the start of construction works and must be provided to the Manager for information. The objective of the CTMP is to appropriately manage any adverse traffic safety and efficiency impacts on other road users and impacts on access to existing properties. (b) To achieve this objective, the CTMP must include: (i) Methods to manage the effects of temporary traffic management activities on the network; (ii) Measures to manage the safety of all transport users; (iii) The estimated numbers, frequencies, routes and timing of traffic movements, including any specific non-working or non-movement hours to manage vehicular and pedestrian traffic congestion near schools or to manage traffic congestion; (iv) Site access routes for heavy vehicles, the size and location of parking areas for plant, construction vehicles and the vehicles of workers and visitors; (v) Identification of detour routes and other methods for the safe management and maintenance of traffic flows, including public transport, pedestrians and cyclists; (vi) Measures to maintain the function of the existing North-Western Shared User Path to a reasonable level of service, to the extent that is reasonably practicable, and where this is not practicable, provide safe detour routes that provide a reasonable level of service; (vii) Measures to maintain safe and practicable access to and from properties and/or private roads where practicable, or to provide alternative arrangements when it will not be. The measures must include, as relevant, details of how access is managed for customer and staff access, service vehicles' loading and unloading of goods, rubbish collection, mail/courier deliveries, emergency access and access for active modes; (viii) The management approach to loads on heavy vehicles, including covering loads of fine

Condition number	Condition
	material, the use of wheel-wash facilities at site exit points and the timely removal of any material deposited or spilled on public roads; (ix) Methods that will be undertaken to communicate traffic management measures to affected road users and to communicate the measures to manage impacts on existing access to affected landowners and occupiers; (x) Details of how sequencing of Project works to mitigate effects on adjacent Arterial Roads has been considered; (xi) Details of how programming of Project works in relation to any known concurrent construction of infrastructure projects within SH16 or adjacent Arterial Roads has been considered; (xii) Details of minimum network performance parameters during the construction phase including the basis for those parameters and measures to monitor compliance; (xiii) Details of any measures proposed to be implemented in the event of minimum network performance parameters identified in Condition 14(b)(xii) above are not achieved, including monitoring frequency and corrective actions; (xiv) Where Project works are within or directly adjacent to open space zoned land, methods to address Condition 15; (xv) Where Project works are within or directly adjacent to the Point Chevalier area shown in Schedule D, temporary traffic management arrangements for maintaining customer access, drive-through circulation, service vehicle access, delivery access, and active mode access to adjacent businesses; (xvi) Details of a Construction Traffic Issues Resolution Process for receiving, investigating and responding to construction traffic and access complaints. The process must include: A. Contact details for lodging a complaint; B. A process for acknowledging receipt of a complaint within two working days, or within 24 hours where the complaint relates to safety or access; C. A process for investigating the complaint and implementing reasonable corrective actions where the subject of the complaint is caused or exacerbated by the construction works; and D. A requirement to respond to the person who raised the issue or complaint to advise them of the outcome of the investigation and any corrective actions proposed or taken; (xvii) Auditing, monitoring and reporting relating to traffic management activities shall be undertaken in accordance with the requirements of the Road Controlling Authority.
15.	Open Space – Construction Access The Requiring Authority must maintain safe and clearly identifiable public access (walking and cycling) through affected open space zoned land available for use during construction, as far as practicable. Such access must seek to minimise significant detours.
16.	Permanent Vehicle Access (a) Prior to submission of an Outline Plan for any part of the Project that will permanently alter an existing lawful vehicle access to a property, the Requiring Authority must consult with the relevant landowner and occupier about the proposed access arrangement. (b) The relevant Outline Plan must demonstrate how safe and practicable permanent vehicle access to that property will be provided, whether by reconfiguration of the existing access or by an alternative access arrangement. (c) This condition does not apply where the relevant landowner has agreed in writing to the access arrangement, or where the relevant property interest has been acquired by the Requiring Authority.
17.	Point Chevalier Transport and Access Plan (a) Any permanent Project works associated with the Point Chevalier Station that are located within Parr Road North or the Service Lane as shown in Schedule D, must be designed so that those

Condition number	Condition																																																										
	works do not compromise any existing (at the time of commencement of construction) safe and practicable access from Parr Road North or the Service Lane for the Point Chevalier properties shown in Schedule D. (b) Prior to submission of the Outline Plan for works affecting Point Chevalier Station, Parr Road North, the service lane as shown in Schedule D, the Requiring Authority must prepare a Point Chevalier Transport and Access Plan. (c) The Point Chevalier Transport and Access Plan is to set out how the final design and construction staging for the Point Chevalier Station area will not compromise existing safe and practicable access, circulation and servicing for properties shown in Schedule D. (d) The Point Chevalier Transport and Access Plan must include details of consultation undertaken with Auckland Transport (or successor), the Council and the property owners and occupiers of the Point Chevalier properties shown in Schedule D, a summary of feedback received, what changes have been made in response, and reasons for any feedback not adopted. (e) The Point Chevalier Transport and Access Plan must be provided with the relevant Outline Plan.																																																										
18.	Construction Noise (a) Construction noise must be measured and assessed in accordance with NZS6803:1999 Acoustics – Construction Noise and must comply with the noise standards set out in Table 1 as far as practicable. Table 1: Construction noise standards <table><tr><th>Time of week</th><th>Time period</th><th>dB LAeq</th><th>dB LAFmax</th></tr><tr><td colspan="4">Activities sensitive to noise</td></tr><tr><td rowspan="4">Weekdays</td><td>0630-0730</td><td>55</td><td>75</td></tr><tr><td>0730-1800</td><td>70</td><td>85</td></tr><tr><td>1800-2000</td><td>65</td><td>80</td></tr><tr><td>2000-0630</td><td>45</td><td>75</td></tr><tr><td rowspan="4">Saturdays</td><td>0630-0730</td><td>45</td><td>75</td></tr><tr><td>0730-1800</td><td>70</td><td>85</td></tr><tr><td>1800-2000</td><td>45</td><td>75</td></tr><tr><td>2000-0630</td><td>45</td><td>75</td></tr><tr><td rowspan="4">Sundays and public holidays</td><td>0630-0730</td><td>45</td><td>75</td></tr><tr><td>0730-1800</td><td>55</td><td>85</td></tr><tr><td>1800-2000</td><td>45</td><td>75</td></tr><tr><td>2000-0630</td><td>45</td><td>75</td></tr><tr><td colspan="4">All other buildings occupied during the works</td></tr><tr><td rowspan="2">All days</td><td>0730-1800</td><td>70</td><td>N/A</td></tr><tr><td>1800-0730</td><td>75</td><td>N/A</td></tr></table> (b) Where compliance with the noise standards set out in Table 1 is not practicable, the methodology in Condition 20 must apply.	Time of week	Time period	dB LAeq	dB LAFmax	Activities sensitive to noise				Weekdays	0630-0730	55	75	0730-1800	70	85	1800-2000	65	80	2000-0630	45	75	Saturdays	0630-0730	45	75	0730-1800	70	85	1800-2000	45	75	2000-0630	45	75	Sundays and public holidays	0630-0730	45	75	0730-1800	55	85	1800-2000	45	75	2000-0630	45	75	All other buildings occupied during the works				All days	0730-1800	70	N/A	1800-0730	75	N/A
Time of week	Time period	dB LAeq	dB LAFmax																																																								
Activities sensitive to noise																																																											
Weekdays	0630-0730	55	75																																																								
	0730-1800	70	85																																																								
	1800-2000	65	80																																																								
	2000-0630	45	75																																																								
Saturdays	0630-0730	45	75																																																								
	0730-1800	70	85																																																								
	1800-2000	45	75																																																								
	2000-0630	45	75																																																								
Sundays and public holidays	0630-0730	45	75																																																								
	0730-1800	55	85																																																								
	1800-2000	45	75																																																								
	2000-0630	45	75																																																								
All other buildings occupied during the works																																																											
All days	0730-1800	70	N/A																																																								
	1800-0730	75	N/A																																																								

Condition number	Condition																														
19.	Construction Vibration Criteria (a) Construction vibration must be measured in accordance with ISO 4866:2010 Mechanical vibration and shock – Vibration of fixed structures – Guidelines for the measurement of vibrations and evaluation of their effects on structures. (b) Construction vibration must comply with the vibration criteria set out in Table 2 as far as practicable. Table 2: Construction vibration criteria <table><tr><th>Receiver</th><th>Location</th><th>Details</th><th>Category A</th><th>Category B</th></tr><tr><td rowspan="2">Occupied sensitive use buildings *</td><td rowspan="2">Inside the building</td><td>2000-0630</td><td>0.3mm/s ppv</td><td>1mm/s ppv</td></tr><tr><td>0630-2000</td><td>1mm/s ppv</td><td>5mm/s ppv</td></tr><tr><td>Other occupied buildings</td><td>Inside the building</td><td>0630-2000</td><td>2mm/s ppv</td><td>5mm/s ppv</td></tr><tr><td>Any buildings identified as Particularly Vibration Sensitive</td><td>Inside the building</td><td>As per relevant use above</td><td>As per relevant use above</td><td>2.5 mm/s ppv</td></tr><tr><td rowspan="2">All other buildings</td><td rowspan="2">Building foundation</td><td>Vibration – transient</td><td rowspan="2">5mm/s ppv</td><td>BS 5228-2 Table B.2</td></tr><tr><td>Vibration - continuous</td><td>BS 5228-2 50% of Table B.2 values</td></tr></table> <i>* BS 5228-2:2009 'Code of practice for noise and vibration control on construction and open sites – part 2: Vibration'</i> (c) Where compliance with the vibration criteria set out in Table 2 is not practicable, the methodology in Condition 20 shall apply.	Receiver	Location	Details	Category A	Category B	Occupied sensitive use buildings *	Inside the building	2000-0630	0.3mm/s ppv	1mm/s ppv	0630-2000	1mm/s ppv	5mm/s ppv	Other occupied buildings	Inside the building	0630-2000	2mm/s ppv	5mm/s ppv	Any buildings identified as Particularly Vibration Sensitive	Inside the building	As per relevant use above	As per relevant use above	2.5 mm/s ppv	All other buildings	Building foundation	Vibration – transient	5mm/s ppv	BS 5228-2 Table B.2	Vibration - continuous	BS 5228-2 50% of Table B.2 values
Receiver	Location	Details	Category A	Category B																											
Occupied sensitive use buildings *	Inside the building	2000-0630	0.3mm/s ppv	1mm/s ppv																											
		0630-2000	1mm/s ppv	5mm/s ppv																											
Other occupied buildings	Inside the building	0630-2000	2mm/s ppv	5mm/s ppv																											
Any buildings identified as Particularly Vibration Sensitive	Inside the building	As per relevant use above	As per relevant use above	2.5 mm/s ppv																											
All other buildings	Building foundation	Vibration – transient	5mm/s ppv	BS 5228-2 Table B.2																											
		Vibration - continuous		BS 5228-2 50% of Table B.2 values																											
20.	Construction Noise and Vibration Management Plan (a) The Requiring Authority must engage a SQEP to prepare CNVMP prior to the start of construction. (b) The objective of the CNVMP is to identify: (i) How Conditions 18 and 19 will be achieved; and (ii) The Best Practicable Option for managing construction noise and vibration effects where compliance with Conditions 18 and 19 cannot practicably be achieved. (c) The CNVMP must be prepared in accordance with Annex E2 of the New Zealand Standard NZS6803:1999 'Acoustics – Construction Noise' and shall, as a minimum, address: (i) a description of the works and anticipated equipment/processes; (ii) hours of operation, including times and days when construction activities would occur; (iii) the construction noise and vibration criteria identified in Conditions 18 and 19; (iv) identification of receivers where noise and vibration criteria apply; (v) a hierarchy of management and mitigation options; (vi) methods and frequency for monitoring and reporting on construction noise and vibration; (vii) procedures for communication and engagement with nearby residents and stakeholders.																														

Condition number	Condition
	including notification of proposed construction activities, the period of construction activities, and management of noise and vibration complaints; (viii) contact details of a project liaison person; (ix) procedures for the regular training of the operators of construction equipment to minimise noise and vibration as well as expected construction site behaviours for all workers; (x) procedures and requirements for the preparation of a Schedule to the CNVMP in accordance with Condition 21; (xi) procedures and trigger levels for undertaking building condition surveys before and after works to determine whether any cosmetic or structural damage has occurred as a result of construction vibration; (xii) identify all buildings considered Particularly Vibration Sensitive. If the Ambassador Theatre is able to be retained in part or intact, then it must be considered as Particularly Vibration Sensitive as set out in Condition 19 Table 2 above; (xiii) the methodology and programme of desktop and field audits and inspections to be undertaken so that that the CNVMP, Schedules and the best practicable option for management of effects are being implemented; and (xiv) requirements for review and updates of the CNVMP.
21.	Schedule to a CNVMP (a) A Schedule to the CNVMP (Schedule) must be prepared by a SQEP prior to the start of construction for an activity to which it relates, in consultation with the owners and occupiers of sites subject to the Schedule, when: (i) construction noise is either predicted or measured to exceed the noise standards in Condition 18; or (ii) construction vibration is either predicted or measured to exceed the Category A standard at the receivers in Condition 19. (b) The objective of the Schedule is to set out the Best Practicable Option measures to manage noise and/or vibration effects of the construction activity beyond those measures set out in the CNVMP. (c) To achieve the objective, the Schedule shall include details such as: (i) Construction activity location, start and finish times; (ii) the nearest neighbours to the construction activity; (iii) the predicted noise and/or vibration for all receivers where the levels are predicted or measured to exceed the applicable standards in Conditions 18 and 19 and the predicted duration of the exceedance; (iv) for works proposed between 2000h and 0630h, the reasons why the proposed works must be undertaken during these hours and why they cannot be practicably undertaken during the daytime; (v) the proposed mitigation options that have been selected, and any mitigation options that have been discounted as being impracticable and the reasons why; (vi) a summary of the consultation undertaken with owners and occupiers of sites subject to the Schedule, and how consultation has and has not been taken into account; and (vii) location, times and types of monitoring. (d) The Schedule must be submitted to the Manager for information at least five working days (except in unforeseen circumstances) in advance of the start of construction that are covered by the scope of the Schedule. (e) Where material changes are made to a Schedule required by this condition, the Requiring Authority must consult the owners and/or occupiers of sites subject to the Schedule prior to submitting the amended Schedule to the Manager for information in accordance with (d) above.
22.	Built Heritage - Commercial Building [Augier condition], Ambassador Theatre and Fisheries

Condition number	Condition
	Building [Augier condition] (Point Chevalier) (a) To the extent practicable, the Requiring Authority must retain the original building footprints, located at and shown in Schedule E: (i) 1224-1228 Great North Road (Commercial Building); (ii) 1218-1220 Great North Road (Ambassador Theatre) AUP Sd Heritage Building 1680; and (iii) 1212-1216 Great North Road (Fisheries Building). (b) If retention of an entire original building footprint is not practicable; the Requiring Authority must undertake a building survey by a SQEP to determine whether it is reasonably practicable to retain: (i) part of the building including adaptive re-use in the project design; and (ii) AUP scheduled internal features of the Ambassador Theatre, if applicable. (c) If retention of any part of a building is not practicable, the Requiring Authority must: (i) Undertake archival documentation and recording of the Ambassador Theatre, if applicable; and (ii) Install interpretive material at the Point Chevalier Station that documents the heritage values of Point Chevalier town centre. (d) The Outline Plan must set out how the hierarchy of measures in (a) to (c) have been applied.
23.	Built Heritage - Former Chamberlain Park Clubhouse (a) To the extent practicable, the Requiring Authority must retain the original building footprint of the former Chamberlain Park Clubhouse located at 990 Great North Road, Western Springs and shown in Schedule F. (b) If the retention of the building is not practicable, the Requiring Authority must: (i) Undertake archival documentation and recording of the building; and (ii) Install interpretive material at the Western Springs Station that documents the heritage values of the original Chamberlain Park Golf Course clubhouse and surrounds. (c) The Outline Plan must set out how the hierarchy of measures in (a) and (b) have been applied.
24.	Built Heritage Construction Management Plan (a) The Requiring Authority must engage a SQEP to prepare a Built Heritage Construction Management Plan prior to the start of construction. The objective of the Built Heritage Construction Management Plan is to identify methods to manage construction effects on the buildings listed in Conditions 22 and 23 and adjacent to Scheduled Heritage Building [AUP 2798] former ASB Building, 1210 Great North Road, Point Chevalier, provided the building(s) are existing at the time of construction and will be retained. (b) The Built Heritage Construction Management Plan must include: (i) Measures to protect retained built heritage buildings from damage during construction, such as barriers and protective screens; (ii) Demolition and deconstruction methods for any heritage buildings not being retained; (iii) Pre- and post- construction works building condition surveys in accordance with the Construction Noise and Vibration Management Plan required by Condition 20 above; (iv) Measures to monitor the buildings during construction works; and (v) Accidental damage protocols.
25.	Waititiko / Meola Creek, Western Springs - Outstanding Natural Feature (a) If the Project includes works within the Outstanding Natural Feature (AUP ID 95), the Requiring Authority must design and construct a bridge structure to cross the Waititiko / Meola Creek, Western Springs within that Feature. The bridge structure must not exceed two supporting piers (and any associated scour protection) in the ONF (either two individual piers or two sets of

Condition number	Condition
	adjacent piers) and must be designed to minimise permanent adverse effects as far as practicable. (b) The Outline Plan(s) must describe the measures that will be implemented during construction to minimise any permanent effects on the ONF. The Requiring Authority must not locate construction laydown areas within the ONF.
26.	Northwest Lava Flow, Western Springs - Outstanding Natural Feature (a) The Project must be designed to minimise permanent effects on the exposed face of the Northwestern Lava Flow Outstanding Natural Feature (AUP ID 132) as far as practicable. (b) The Outline Plan(s) must describe the measures that will be implemented to minimise any permanent impacts.
27.	Landscape Planting (a) The Requiring Authority must, where practicable: (i) Retain existing mature, native vegetation; (ii) Plant at stations and batter slopes; (iii) Use eco-sourced native vegetation; (iv) Re-instatement planting of construction and site compound areas as appropriate; and (v) Integrate planting with any planting required by the resource consents for the Project. (b) For planting under (a), the Requiring Authority must: (i) Undertake planting within the first planting season following Completion of Construction; (ii) undertake ground preparation (top soiling and decompaction) and mulching where appropriate; (iii) undertake pest plant control for a five year period; and (iv) monitor planted areas and undertake replacement planting as necessary for a five year period or until 80% canopy cover is achieved (whichever is less). (c) The measures described in (a) must be shown in the Form and Landscaping Statement submitted with the Outline Plan.
28.	Tree Protection Methodology (a) Prior to the start of construction, the Requiring Authority must engage a SQEP to prepare a tree protection methodology for the trees identified in Schedule G (existing at the time of construction). The tree protection methodology must demonstrate how the design and location of the Project has avoided, remedied or mitigated effects on any tree listed in Schedule G. (b) The methodology must include: (i) Procedures such as protective fencing, ground protection and physical protection of roots, trunks and branches; and (ii) Methods and procedures to be used when the trees are pruned and/or work is undertaken within the rootzone.
29.	Geotechnical Design Statement Prior to the start of construction at Waterview Interchange as shown in Schedule H, the Requiring Authority must provide a copy of a Geotechnical Design Statement to the Council for information purposes. The Geotechnical Design Statement must be prepared by a SQEP and confirm that there will be no material adverse effects to land, buildings or infrastructure beyond the designation boundary arising from both temporary and permanent works associated with the Project.
30.	Operational Traffic Low Noise Road Surface The Requiring Authority must implement an asphalt surface or similar low noise road surface


Condition number	Condition
	throughout the Project (excluding any existing local roads with chip seal).
31.	For the purposes of Conditions 32 to 40: (a) NZS 6806 – means NZS 6806:2010 Acoustics – Road-traffic noise – New and altered roads; (b) Building-Modification Mitigation – has the same meaning as in NZS 6806; (c) Noise Barrier is any barrier that has a minimum surface density of 15 kg/m² and is designed to have no gaps between the panels and the ground and between panels (d) Habitable Space – has the same meaning as in NZS 6806; (e) Mitigation – has the same meaning as in NZS 6806; (f) Protected Premises and Facilities (PPFs) – means only the premises and facilities identified in Schedule I “Identified PPFs”; (g) Structural mitigation – has the same meaning as in NZS 6806; (h) Design Year – means the year 2051; (i) Do-nothing scenario – has the same meaning as in NZS 6806; and (j) Detailed design scenario – means the Project and State Highway 16 with traffic volumes for the Design Year, with any BPO structural mitigation implemented.
32.	As part of the detailed design of the Project, a SQEP must determine the BPO structural mitigation for mitigating noise effects on PPFs. The SQEP must, as part of the BPO, consider if existing Noise Barriers could be retained or altered.
33.	(a) Prior to the start of construction works, a SQEP must identify those PPFs where, following implementation of BPO structural mitigation: (i) The external traffic-noise level at the façade facing the Project is higher than 67 dB L_{Aeq}(24h); and (ii) A noise level increase of 1 dB or more will occur due to the Project implementation; and (iii) where Building-Modification Mitigation might be required to achieve 40 dB L_{Aeq}(24h) inside Habitable Spaces (‘Category C Buildings’) as far as reasonably practicable. Such PPFs will be classified as “Category C Buildings”. (b) The noise level increases discussed above must be based on a comparison of the Do-nothing scenario and the Detailed design scenario.
34.	Prior to the start of construction in the vicinity of each Category C Building, the Requiring Authority must write to the owner of the Category C Building requesting entry to assess the noise reduction performance of the existing building envelope. If the building owner agrees to entry within 12 months of the date of the Requiring Authority’s letter, the Requiring Authority must instruct a SQEP to visit the building and assess the noise reduction performance of the existing building envelope.
35.	For each Category C Building identified, the Requiring Authority is deemed to have complied with Condition 34 above if: (a) the Requiring Authority’s Suitably Qualified Person has visited the building and assessed the noise reduction performance of the building envelope; or (b) the building owner did not agree to entry, or the building owner agreed to entry but the Requiring Authority could not gain entry, within 12 months of the date of the Requiring Authority’s letter sent in accordance with Condition 34 above (including where the owner did not respond or entry was denied by a tenant within that period); or (c) the building owner cannot, after reasonable enquiry, be found prior to Completion of Construction of the Project. If (b) or (c) above apply to a Category C Building, the Requiring Authority is not required to offer to implement Building-Modification Mitigation to that building.
36.	Subject to Condition 35 above, within six months of the assessment undertaken in accordance with

Condition number	Condition
	Condition 34, the Requiring Authority must write to the owner of each Category C Building advising: (a) if Building-Modification Mitigation is required and reasonably practicable to achieve 40 dB $L_{Aeq(24h)}$ inside habitable spaces; and (b) the options available for Building-Modification Mitigation to the building, if required and reasonably practicable; and (c) that the owner has three months to decide whether to accept Building-Modification Mitigation to the building and to advise which option for Building-Modification Mitigation the owner prefers, if the Requiring Authority has advised that more than one option is available.
37.	Once Building-Modification Mitigation has been agreed, it shall be implemented in a reasonable and practical timeframe by arrangement with the owner.
38.	Subject to Condition 34, where Building-Modification Mitigation is required, the Requiring Authority is deemed to have complied with Condition 33 if: (a) the Requiring Authority has completed Building Modification Mitigation to the building; or (b) an alternative agreement for mitigation is reached between the Requiring Authority and the building owner; or (c) the building owner did not accept the Requiring Authority's offer to implement Building-Modification Mitigation within three months of the date of the Requiring Authority's letter sent in accordance with Condition 36 (including where the owner did not respond within that period); or (d) the building owner cannot, after reasonable enquiry, be found prior to Completion of Construction of the Project.
39.	All noise barriers required as determined by the BPO assessment in accordance with Condition 32 must be installed prior to the opening of the Project.
40.	The Noise Barriers that are part of the BPO must be maintained so they retain their noise reduction performance as far as practicable.
41.	Designation removal As soon as practicable following completion of construction of the entire Project, the Requiring Authority shall give notice to Auckland Council in accordance with section 182 of the RMA (or its equivalent) for removal of those parts of the designation that are not required for the long-term operation, maintenance and mitigation of effects of the Project.


Attachments

Schedule A – Project Boundary for the Northwest Rapid Transit Project

Schedule A - Designations for the Northwest Rapid Transit Project

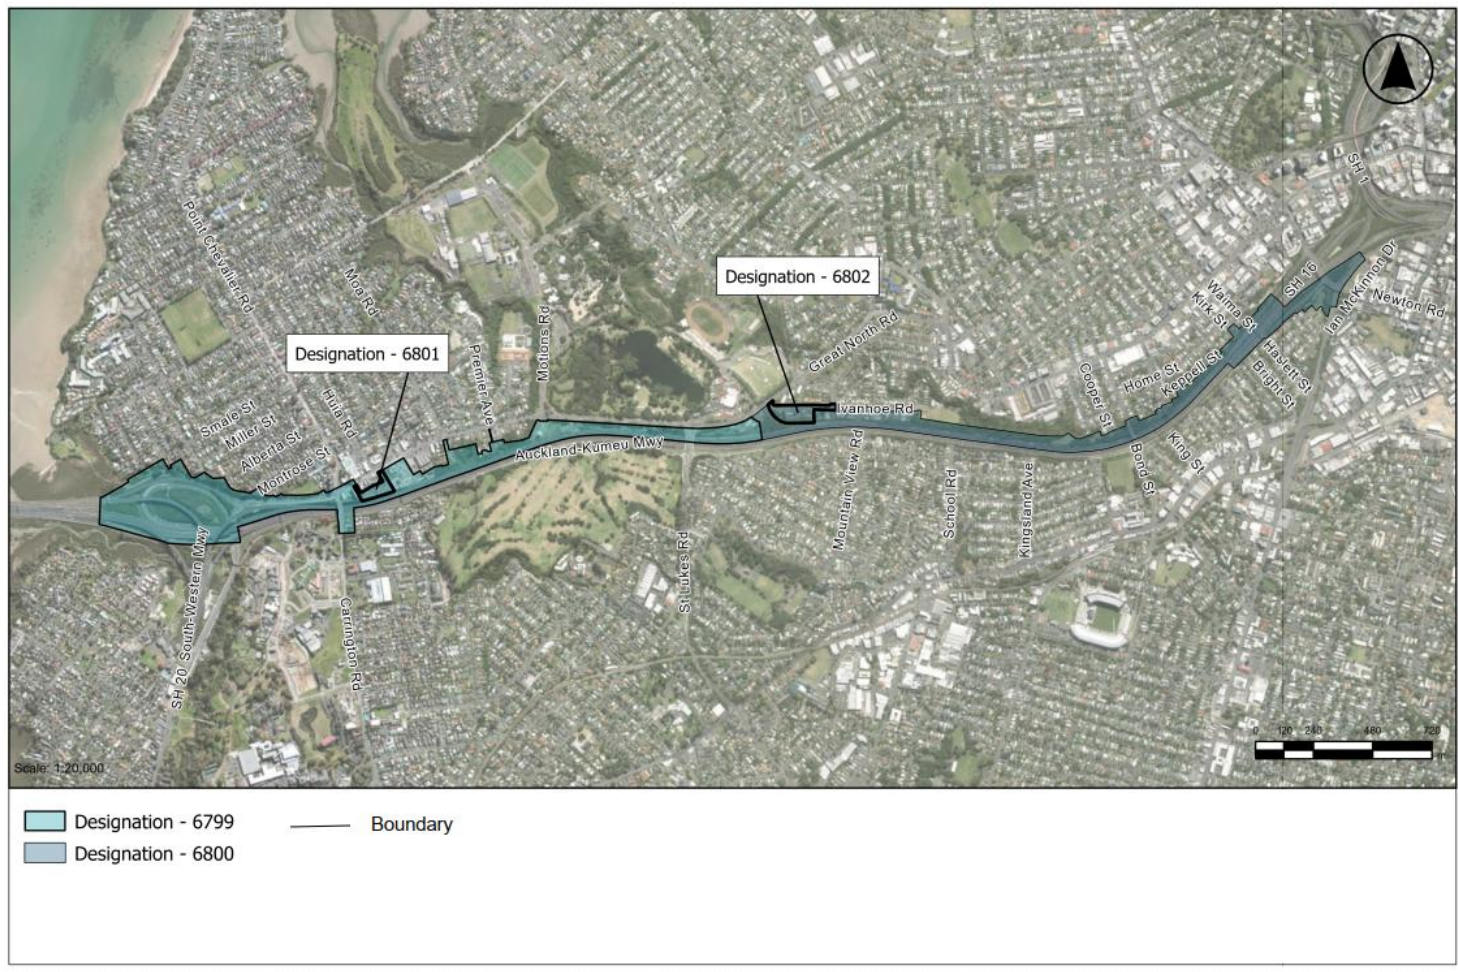

Schedule A - Designations for the Northwest Rapid Transit Project

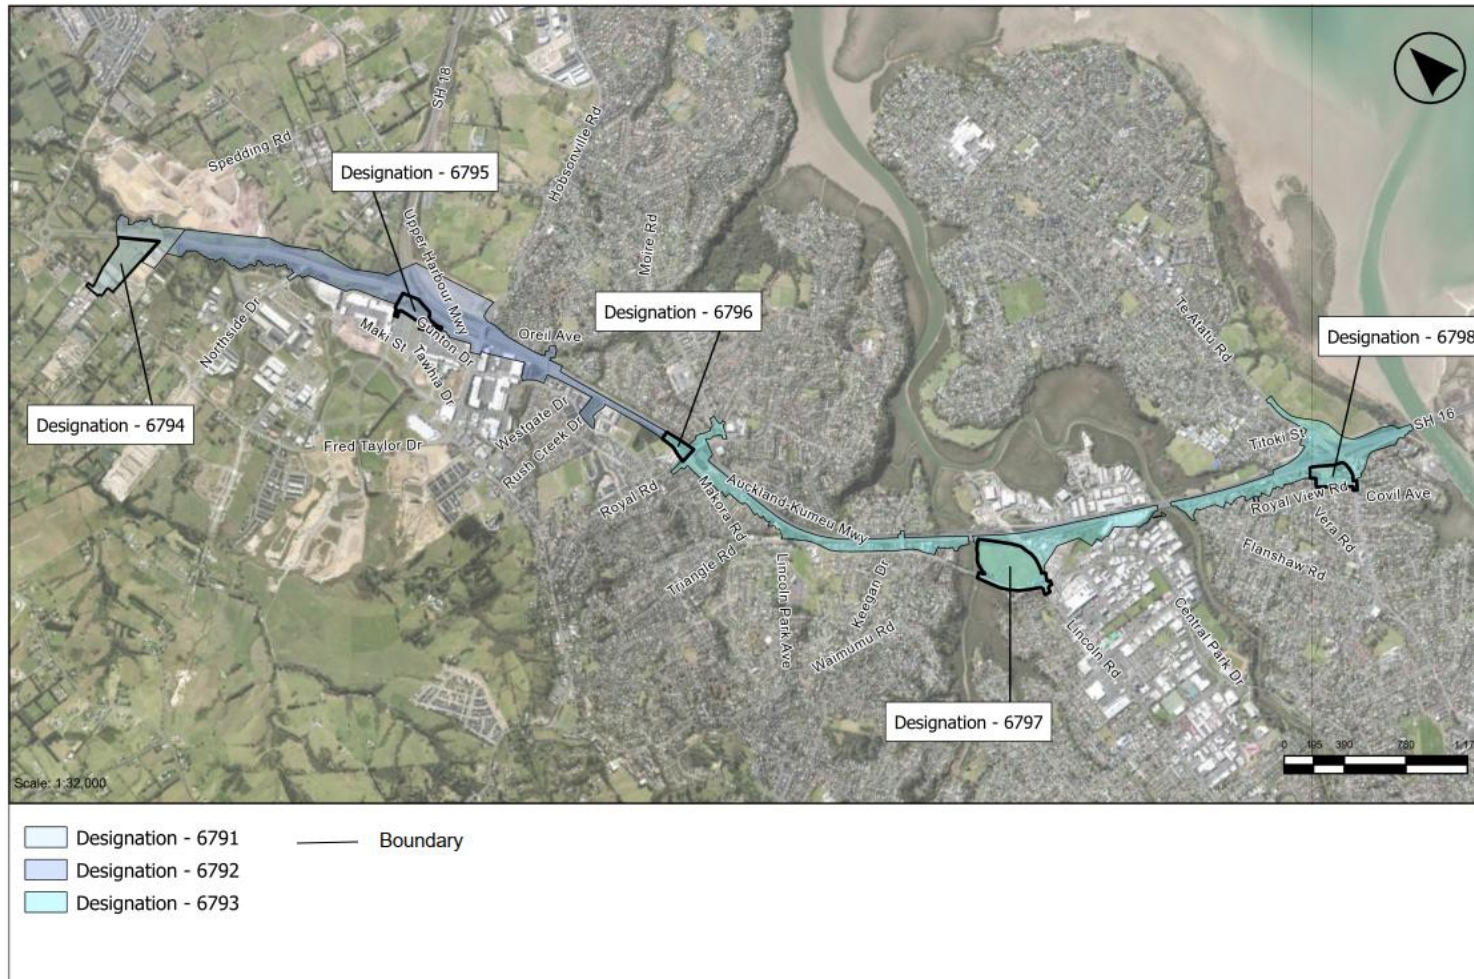

Schedule B – Danger Rating Matrix and Flood Hazard Ratings


Danger Rating Matrix

Hazard			Hazard to People Outside					
The Danger Rating is determined based on the combination of the assessed Hazard Inside and Hazard Outside in accordance with this matrix.			Assess flood hazard along most likely evacuation route using the Flood Hazard Ratings Chart.					
			Conditions	An evacuation route is available and does not require wading	An evacuation route may be available but requires wading. Hazard is a function of depth and velocity of flooding along the evacuation route. (Refer to Flood Hazard Ratings Chart)			
			Hazard Rating	Very Low	Low hazard for all	Low hazard for adults	Moderate hazard	High hazard for all
			D & V Thresholds	n/a	(Refer to Flood Hazard Ratings Chart)	(Refer to Flood Hazard Ratings Chart)	(Refer to Flood Hazard Ratings Chart)	(Refer to Flood Hazard Ratings Chart)
Hazard to People Inside	Assess flood hazard inside the building based on depth over building flood level (assuming V = 0 m/s inside the building). Building floor levels are to be based on existing available information or desk top assessment methods.	Habitable floor remains dry	Very Low	Floodwaters are NOT touching the building footprint. Nil depth over habitable floor.				
			Very Low	Floodwaters are touching the building footprint. Nil depth over habitable floor.				
	Habitable floor is wet.	Low hazard for all	Depth (D) over habitable floor: $0 \leq D < 0.5\text{m}$					
		Low hazard for able-bodied adults /	Depth (D) over habitable floor: $0.5 \leq D < 0.85\text{m}$					
		Moderate hazard	Depth (D) over habitable floor: $0.85 \leq D < 1.2\text{m}$					
		High hazard for all	Depth (D) over habitable floor: $D \geq 1.2\text{m}$					


Intolerable Risk Threshold @ 1% AEP

DANGER RATING KEY	HIGH DANGER
	MODERATE DANGER
	LOW DANGER

FLOOD HAZARD RATINGS

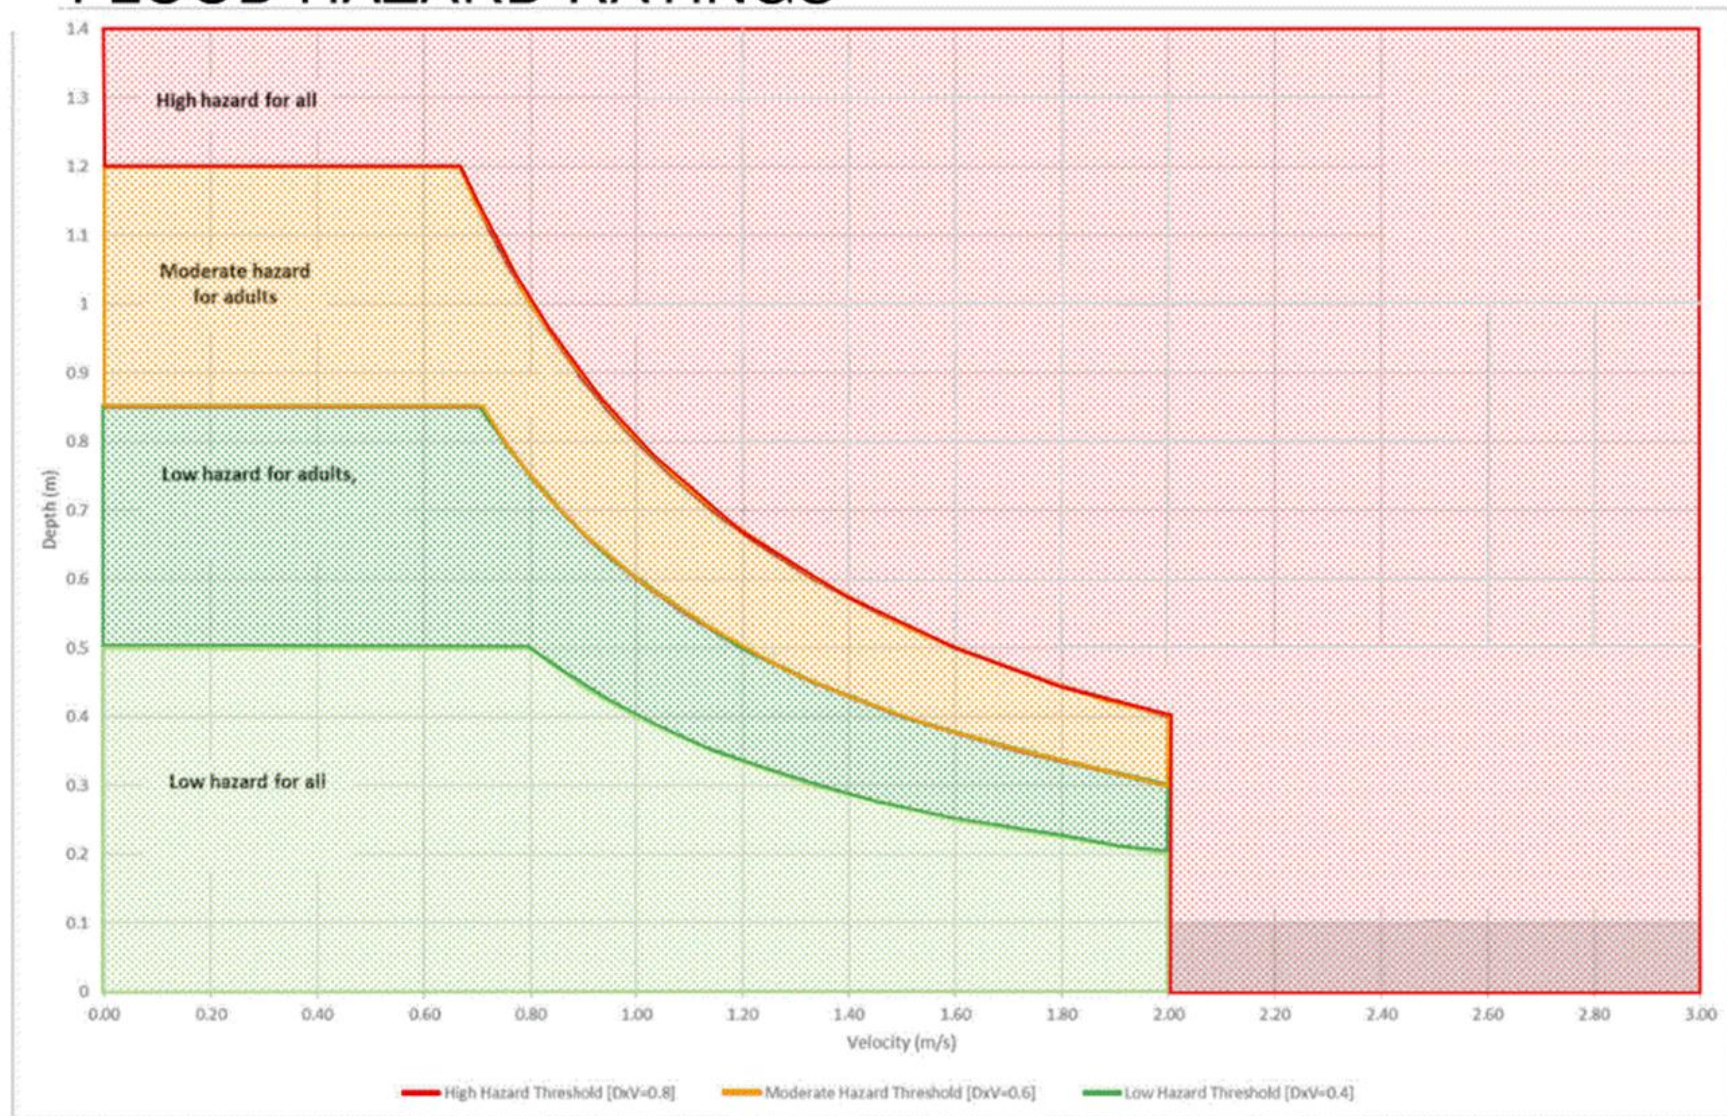

Schedule C – Supermarket Access – 1136 Great North Road, Point Chevalier

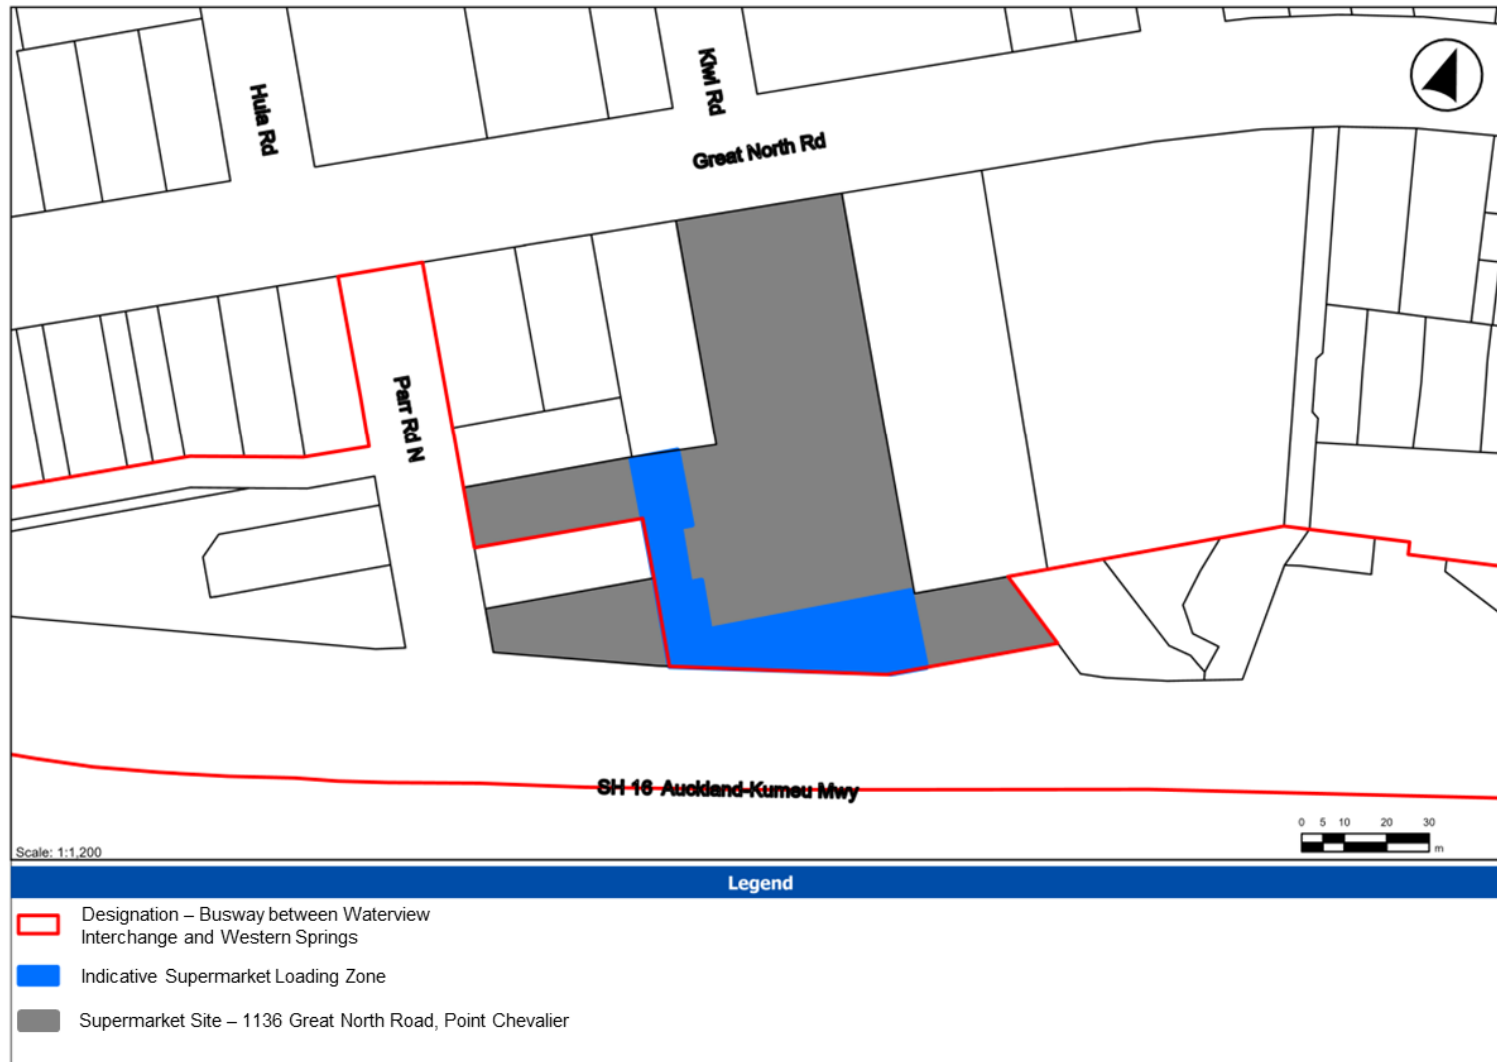

Schedule D – Point Chevalier Properties



Schedule E – Original Building Footprints, Commercial Building, Ambassador Theatre and Fisheries Building, Point Chevalier




Schedule F – Former Chamberlain Clubhouse



Schedule G – Tree Schedule





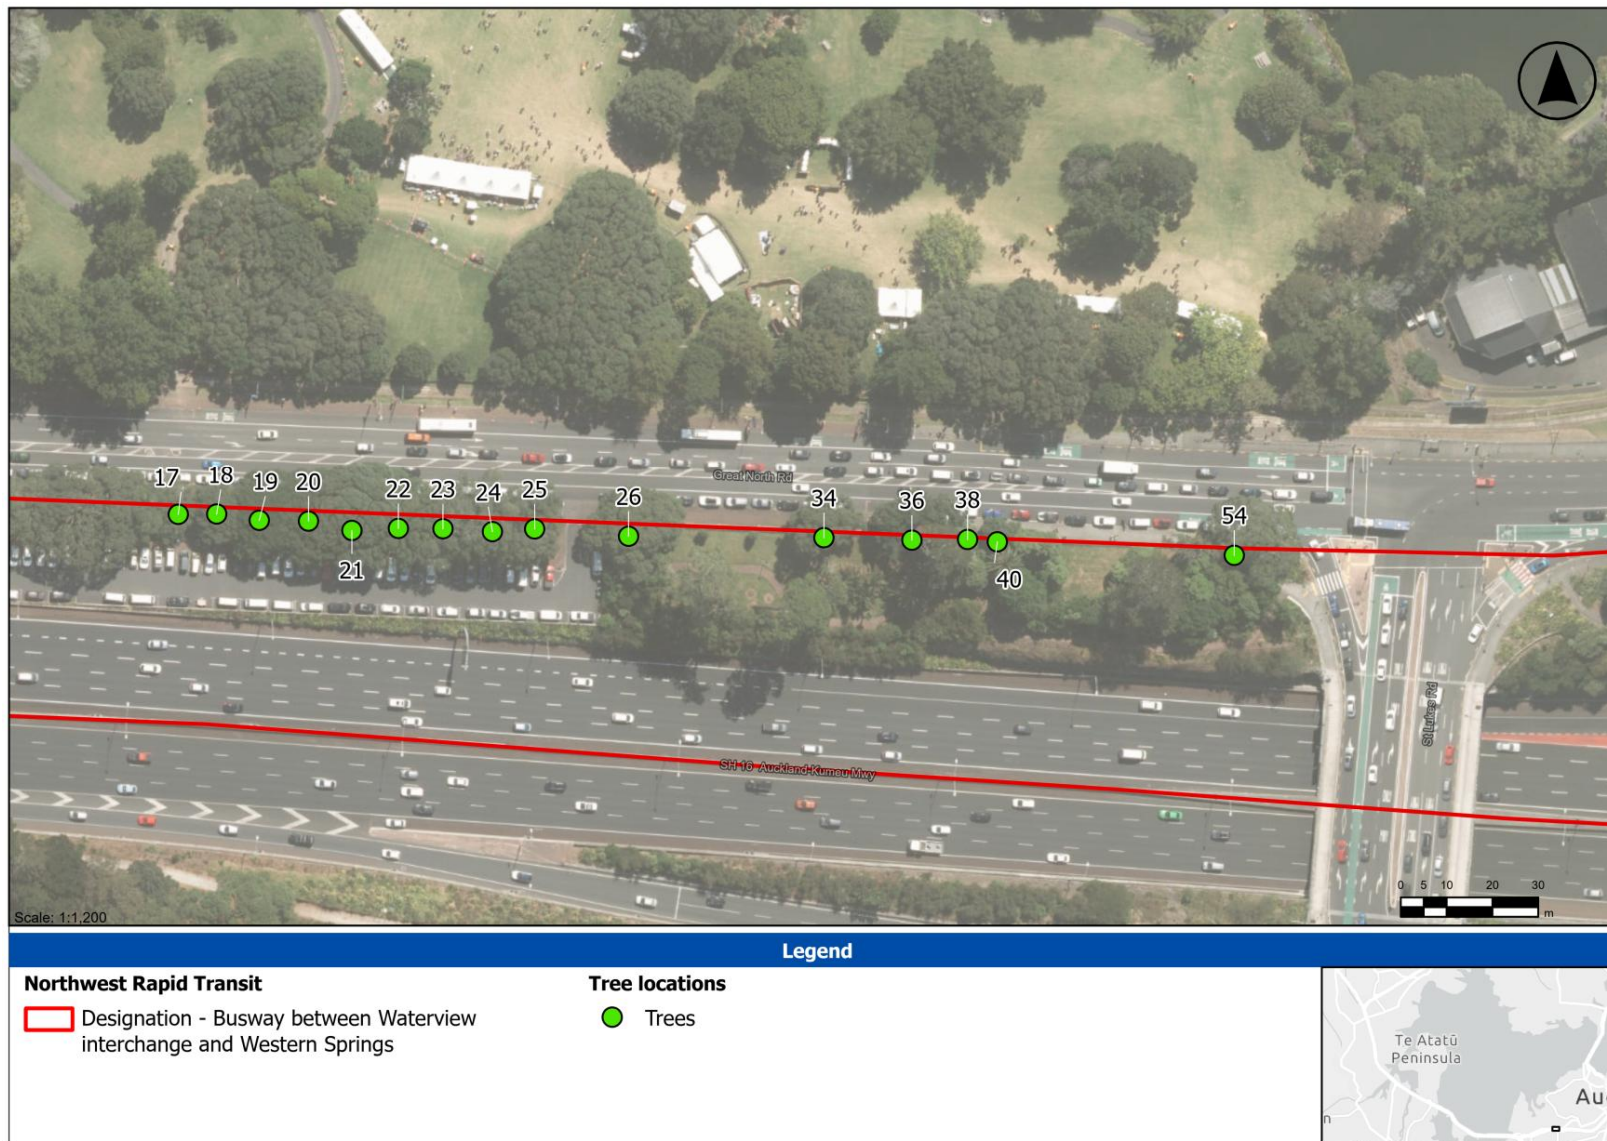



Schedule H – Geotechnical Design Statement area



Schedule I – Identified PPFs

